

倍仕特企业(香港)有限公司
BEISIT ENTERPRISE (HONGKONG) CO., LIMITED
倍仕得电气(杭州)有限公司
BEISIT ELECTRIC (HANGZHOU) CO., LTD.

浙江杭州余杭经济技术开发区康桥路1号 邮编: 311100
Add.: 1, Tangmel Rd., Yuhang Economic-Technological
Development Area, Hangzhou, Zhejiang 311100, China
Tel: 0086-571-8936 2888
Fax: 0086-571-8936 2999
E-mail: info@beisit.com
Http: // www.beisit.com.cn

We reserve the right to make technical changes or modify the
contents of this document without prior notice. All the agreed
particulars shall prevail. All rights reserved.



Nylon Cable Ties Wiring Accessories Product Catalog





"I" stands for "Integrity 誠信"

"I" stands for "International 國際"

"BEST": Best 最好

做誠信的國際企業，以更好的品質服務世界！

Functions as an international company of high integrity whose mission is to provide the finest products and services worldwide.



Certificate CN13/21056



全系列通過美國UL認證

All sizes of nylon cable ties are UL listed.



完整的模具加工中心體系
Established a complete mold processing center

BEISIT

強大的產品開發能力
Strong R&D capability.



BEISIT

為客戶特殊定制能力
Special customized ability for clients.
承接精密模具製造及精密注塑生產
Undertake External Precision mould manufacturing and Precision Injection Production.



檢測中心
Testing Center

BEISIT

先進的檢測設備
Advanced detection equipment



BEISIT

倍仕得產品檢驗遵循歐洲NE標準和美國UL標準
Test of Beisit follows the European newest standard of EN and America standard of UL





企業認證
Company Certification

領先的配線器材產品服務商
A leading wiring accessories supplier



ISO9001(SGS)質量管理體系運作
Managed Strictly According to ISO9001(SGS).





產品認證

Products Certification



REACH

RoHS

企業文化

Corporate Culture



倍仕得使命：為全球工業提供最可靠的連接器產品


Mission: To supply most reliable connectors for global industry.

客戶價值觀：敬畏客戶；為客戶創造獨特價值的決心不動搖

To clients: Revere clients; Never wave our determination to create unique value for clients.

品質價值觀：品質如命，祇有一次；做出100%合格產品的決心不動搖

To quality: Quality as life, only once. Never wave our determination to produce 100% qualified products.

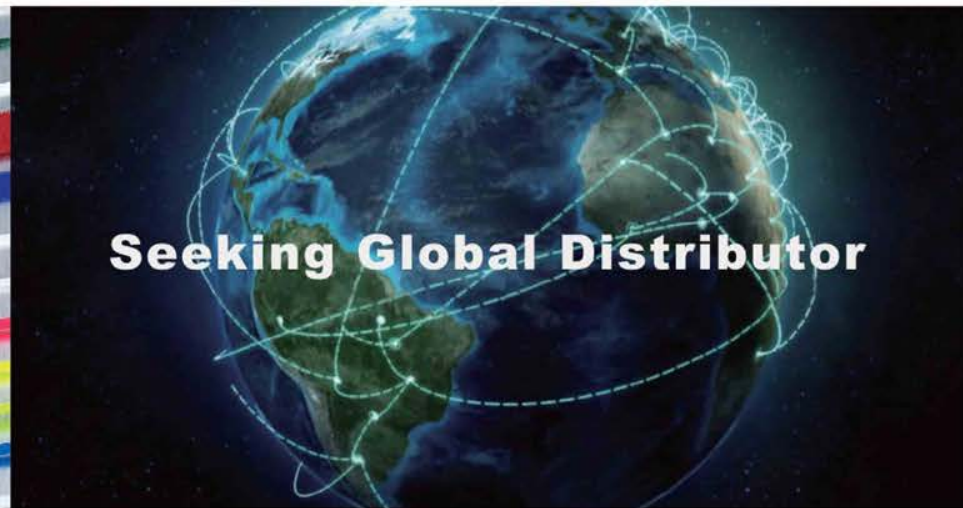


Seeking Global Distributor

產品目錄 CONTENTS



- 01 尼龍扎線帶
NYLON CABLE TIE
- 03 固定帶式扎線帶/標牌扎線帶
MOUNTING CABLE TIE/ MARKER CABLE TIE
- 04 可鬆式扎線帶/可選式扎線帶
RELEASEABLE CABLE TIE/ RELEASABLE CABLE TIE
- 05 雙扣式尼龍扎帶/雙頭扎線帶
DOUBLE LOCKING CABLE TIE/ DOUBLE HEAD CABLE TIE
- 06 插鎖式扎線帶/電源線束線帶
PUSH MOUNT TIE/ WIRE COLLECT TIE
- 07 粘扣帶
HOOK & LOOP CABLE TIE(MAGIC CABLE TIE)
- 08 粘扣包裝帶/粘扣帶 (一般型)
HOOK & LOOP CABLE TIE(PACKING LIST)/
HOOK & LOOP TIE (FASTENING TAPE)
- 09 扎帶槍
TIE GUN SERIES
- 10 扎帶包裝系列
CABLE TIE PACKING OF SERIES
- 11 A系列包裝
PACKING OF SERIES A(POLYBAG PACKING)
- 13 B系列包裝
PACKING OF SERIES B
(ASSORTED POLYBAG PACKING)
- 17 C系列包裝
PACKING OF SERIES C
(PET CANISTER PACKING ASSORTED PE BOX PACKING)
- 25 D系列包裝
PACKING OF SERIES D
(BLISTER PACKING WITH CARD DOUBLE BLISTER PACKING)
- 31 捆扎帶/金屬捆扎帶
CABLE TIE BUNDLER/ METALLIC CABLE TIE BUNDLER
- 32 操作說明
OPERATION INSTRUCTION
- 33 包裝方式
MANNER OF PACKING
- 35 不銹鋼扎帶系列
STAINLESS STEEL CABLE TIE SERIES
- 36 不銹鋼扎帶-自鎖式
STAINLESS STEEL CABLE TIE-BALL LOCK TYPE
- 37 不銹鋼扎帶-L型鎖緊式
STAINLESS STEEL CABLE TIE-WING LOCK TYPE
- 38 不銹鋼扎帶-階梯型單勾鎖緊式
STAINLESS STEEL CABLE TIE-LADDER SINGLE BARB LOCK TYPE
- 39 不銹鋼扎帶-階梯型多重鎖緊式
STAINLESS STEEL CABLE TIE-LADDER MULTI BARB LOCK TYPE
- 40 不銹鋼扎帶-可選式
STAINLESS STEEL CABLE TIE-RELEASEABLE TYPE
- 41 不銹鋼扎帶-棘輪式
STAINLESS STEEL CABLE TIE-RATCHET-LOKT TYPE
- 43 尼龍不銹鋼嵌片扎帶
NYLON CABLE TIE WITH STAINLESS STEEL INLAY
- 44 不銹鋼帶/常用扎帶 (紙盒包裝) /常用扎帶 (塑料盒包裝)
STAINLESS STEEL BAND/ BAND IN CARDBOARD/
BAND IN PLASTIC DISPENSER
- 45 不銹鋼光面帶
STAINLESS STEEL STRAP-BARE TYPE
- 46 不銹鋼扣
BANDING BUCKLE
- 47 不銹鋼扎帶工具/LA型型裝輪緊帶機/LA20型型裝輪緊帶機
STAINLESS STEEL CABLE TIE TOOL/ STAINLESS STEEL CABLE TIE TOOL-
COMMON TYPE/ STAINLESS STEEL CABLE TIE TOOL-STRENGTHEN TYPE
- 48 配線器材
WIRING ACCESSORIES
- 49 圓型鋼釘線卡/方形鋼釘線卡
WIRING ACCESSORIES CIRCLE NAIL CABLE CLIP/ SQUARE NAIL CABLE CLIP
- 50 BT膨脹管/螺絲式膨脹管
EXPAND NAILS/SCREW ON WIRE CONNECTOR
- 51 卷式纏繞帶/卷式結束帶/ECM型配線標志
SPIRAL WRAPPING BAND/ SPIRAL WRAPPING BAND/ ECM-TYPE WIRE MARKERS
- 52 熱收縮套管
HEAT-SHRINKABLE TUBINGS
- 53 PEC系列建築裝潢線槽
ARCHITECTURE & DECORATING WIRE DUCT
- 54 絕緣配線槽
INSULATING DISTRIBUTING SLOT

Cable Ties Series 扎綫帶系列

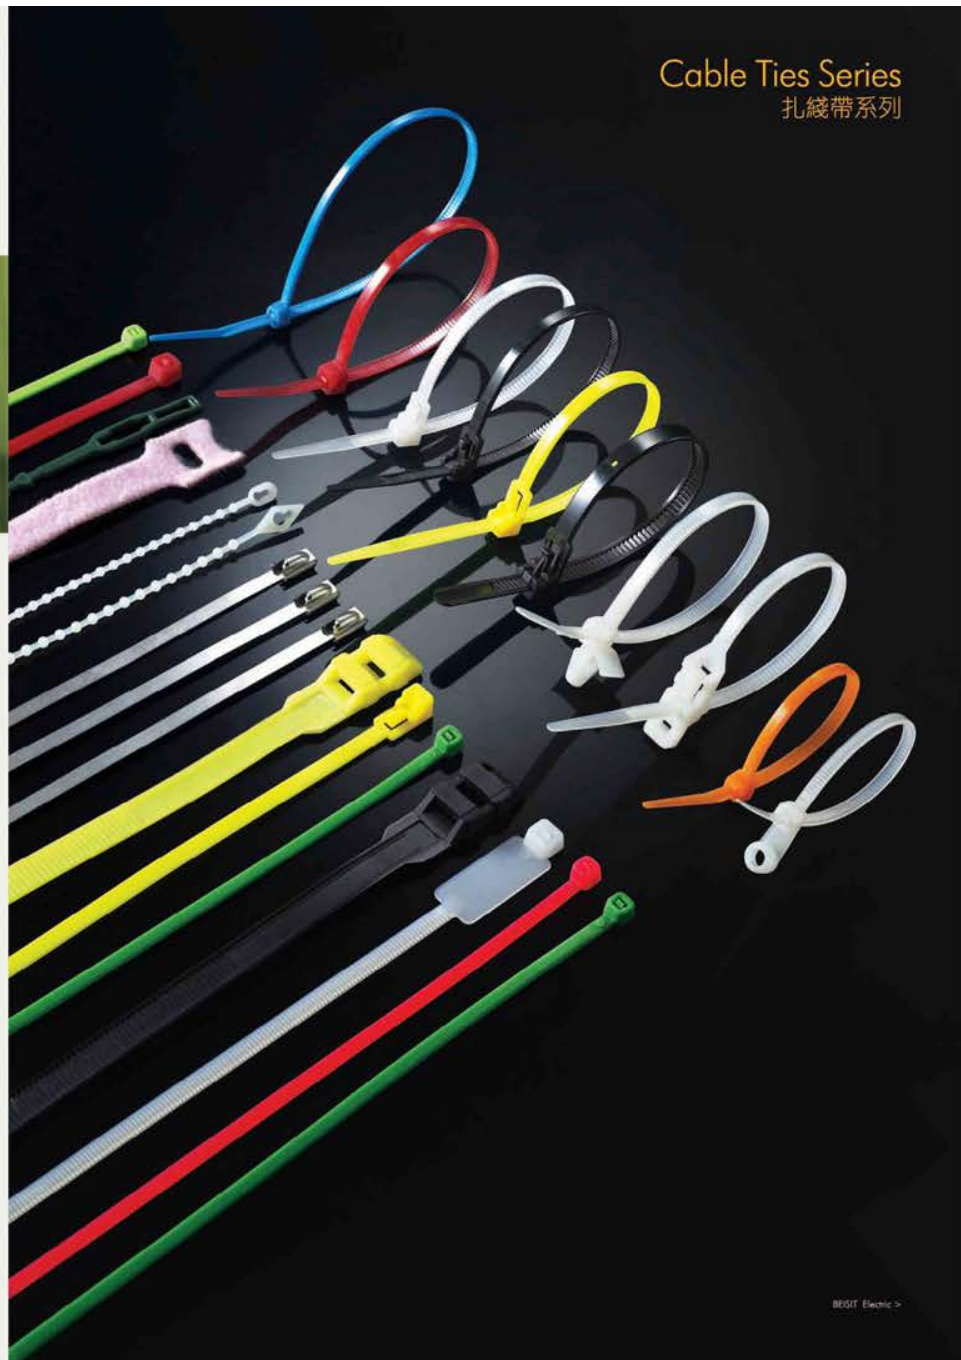




材質：採用UL認可之尼龍66料制成，防火等級94V-2，耐酸、耐鹼、絕緣性良好，不易老化、承受力強。

顏色：標準顏色為本色(白色)，另有抗紫外線之黑色，特殊顏色歡迎訂做。

Material: UL Approved Nylon 66/94V-2, corrosion resistant, well insulation, difficult to aging and strongly endurable.

Color: Natural, UV Resistant black and other colors customized.

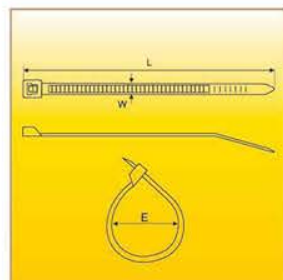

Tensile Strength:18lbs (8kgs)

型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM
	INCH	MM		
BT-2.5×60	2.4"	60	2.5	2-11
BT-2.5×80	3.2"	80		2-16
BT-2.5×100	4.0"	100		2-22
BT-2.5×120	4.7"	120		2-30
BT-2.5×150	6.0"	150		2-35
BT-2.5×160	6.3"	160		2-40
BT-2.5×200	8.0"	200		3-50

Tensile Strength:40lbs (18kgs)

型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM
	INCH	MM		
BT-3.6×140	5.5"	140	3.6	3-33
BT-3.6×150	6.0"	150		3-35
BT-3.6×180	7.1"	180		3-42
BT-3.6×200	8.0"	200		3-50
BT-3.6×250	10"	250		3-65
BT-3.6×280	11"	280		3-70
BT-3.6×300	12"	300		3-80
BT-3.6×370	14.6"	370		3-105

Tensile Strength:50lbs (22kgs)

型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM
	INCH	MM		
BT-4.8×120	4.7"	120	4.8	3-30
BT-4.8×160	6.3"	160		3-40
BT-4.8×180	7.1"	180		3-42
BT-4.8×190	7.5"	190		3-46
BT-4.8×200	8.0"	200		3-50
BT-4.8×250	10"	250		3-65
BT-4.8×280	11"	280		3-70
BT-4.8×300	12"	300		3-80
BT-4.8×350	14"	350		3-90
BT-4.8×360	14.2"	360		3-94
BT-4.8×370	14.6"	370		3-98
BT-4.8×380	15"	380		3-102
BT-4.8×400	16"	400		3-105
BT-4.8×430	16.9"	430		3-120
BT-4.8×450	17.7"	450		3-130
BT-4.8×500	19.7"	500		3-150

扎帶存儲條件 STORAGE CONDITIONS

尼龍天性易受環境影響，尼龍需進行潮濕處理以達到更好的功效，應存放於幹燥涼爽的地方，並避免陽光直接照射，扎帶存放於塑料袋中，使用前請勿打開。

Nylon is inherent susceptible to environmental conditions. PA66 cable ties are moisturized to optimum performance level at machine-side and should be stored in cool and dry areas out of direct sunlight. Cable ties are packaged in plastic bags and should remain sealed until ready for use.

Tensile Strength:120lbs (55kgs)

型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM
	INCH	MM		
BT-7.2×150	6.0"	150	7.2	3-35
BT-7.2×200	8.0"	200		3-50
BT-7.2×250	10"	250		4-65
BT-7.2×280	11"	280		4-78
BT-7.2×300	12"	300		4-80
BT-7.2×350	14"	350		4-90
BT-7.2×370	14.6"	370		4-98
BT-7.2×380	15"	380		4-100
BT-7.2×400	16"	400		4-105
BT-7.2×450	18"	450		4-110
BT-7.2×500	20"	500		4-150
BT-7.2×530	20.9"	530		4-160
BT-7.2×550	21.6"	550		4-165

Tensile Strength:175lbs (80kgs)

型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM
	INCH	MM		
BT-9.0×400	16"	400	9.0	8-105
BT-9.0×450	18"	450		8-118
BT-9.0×500	20"	500		8-150
BT-9.0×550	21.6"	550		8-160
BT-9.0×600	23.6"	600		8-170
BT-9.0×650	25.6"	650		8-185
BT-9.0×720	28.3"	720		10-195
BT-9.0×800	31.5"	800		10-230
BT-9.0×900	35.5"	900		10-265
BT-9.0×1000	29.4"	1000		10-300
BT-9.0×1100	43.3"	1100		10-335
BT-9.0×1200	47.2"	1200		10-370

Tensile Strength:250lbs (114kgs)


型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM
	INCH	MM		
BT-12×650	25.6"	650	12	14-185
BT-12×900	25.5"	900		14-265



材質：採用UL認可之尼龍66材料制成防火等級94V-2，耐酸、耐鹼、不易老化。
特點：扎帶捆扎電纜後，將整束電纜用螺絲固定于基板上。
Material: UL Approved Nylon 66/94V-2, corrosion resistant, well insulation, difficult to aging
Usage: After bundled wires, fix them on plate by screwing.



型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX.BUNDLE DIA. MM	承受力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
MH-100MA	4"	100	2.5	22	18	8.0
MH-100	4"	100	3.6	22	40	18
MH-150	6"	150	3.6	32	40	18
MH-200	8"	200	4.8	42	50	22
MH-200A	8"	200	7.2	50	120	55
MH-300	12"	300	7.2	80	120	55
MH-350	14"	350	7.2	90	120	55



標牌扎綫帶 MARKER CABLE TIE



材質：採用UL認可之尼龍66材料制成，防火等級94V-2，耐酸、耐鹼、不易老化。
特點：扎帶前端設有空白標牌，可用筆在上面標志記號。
Material: UL Approved Nylon 66/94V-2, corrosion resistant, well insulation, difficult to aging
Usage: Can make a mark on the blank tag at the head of the cable tie.

型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX.BUNDLE DIA. MM	承受力 TENSILE STRENGTH		標牌尺寸 MARKER SIZE(MM)
	INCH	MM			LBS	KGS	
MT-100	4"	100	2.5	22	18	8.0	25×8
MT-200	8"	200	4.6	50	50	22.0	28×13
MT-210	8.3"	210	3.0	55	18	8.0	28×20



材質：採用UL認可之尼龍66材料制成防火等級94V-2，耐酸、耐鹼、不易老化。
用法：臨時或永久捆扎物品，并可迅速添加或減少捆扎物。
Material: UL Approved Nylon 66/94V-2, corrosion resistant, well insulation, difficult to aging
Usage: Temporary or permanent bundling, and can quickly add or reduce strapping content.


型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX.BUNDLE DIA. MM	承受力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
RT-150	6"	150		35		
RT-200	8"	200	7.2	50	50	22
RT-250	10"	250		65		
RT-300	12"	300		80		
RT-200MA	8"	200	4.8	50	40	18



可退式扎綫帶 RELEASEABLE CABLE TIE

材質：採用UL認可之尼龍66材料制成，防火等級94V-2，耐酸、耐鹼、不易老化。
用法：臨時或永久捆扎物品，并可迅速添加或減少捆扎物。
Material: UL Approved Nylon 66/94V-2, corrosion resistant, well insulation, difficult to aging
Usage: Temporary or permanent bundling, allows for quick addition or removal of wires or items.

型號 ITEM NO.	長L	寬W MM	(最大)捆扎範圍 MAX.BUNDLE DIA. MM	承受力 TENSILE STRENGTH	
				LBS	KGS
RL-100	100	3.6	22	40	18
RL-150	150	4.7	35	50	22
RL-200	200	4.7	50	50	22
RL-250	250	4.8	65	50	22






材料：採用UL認可之尼龍12材料制成，防火等級94V-2，耐酸，耐鹼，不易老化。
用法：雙鎖式設計，承受力特強，可達到安全捆扎線纜的功能。可用於建築工業。
Material: UL Approved Nylon 12/94V-2, corrosion resistant, well insulation, difficult to aging.
Usage: Double locking design, strongly endurable for securing and bundling of cables in the utility and construction industries.



型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX. BUNDLE DIA. MM		承受力 TENSILE STRENGTH	
	INCH	MM				LBS	KGS
DL-180	7"	180	9.0	45		88	40
DL-260	10 1/4"	260	9.0	66		110	50
DL-350	13 5/8"	350	9.0	90		110	50




雙頭扎綫帶
DOUBLE HEAD CABLE TIE




材質：採用UL認可之尼龍66S材料制成，防火等級94-2，耐酸，耐鹼，不易老化。
Material: UL Approved Nylon 66S/94V-2, corrosion resistant, well insulation, difficult to aging.

型號 ITEM NO.	長L		寬W MM	D1		D2		承受力 TENSILE STRENGTH	
	INCH	MM		MAX.	MIN.	MAX.	MIN.	LBS	KGS
RDCV-225	8 7/8"	225	4.8	59	2.5	52	2.0	50	22
RDCV-300	11 7/8"	300	4.8	83	2.5	76	2.0	50	22
RDCV-370	14 9/16"	370	4.8	105	2.5	98	2.0	50	22



材質：採用UL認可尼龍66材料制成，防火等級94V-2，耐酸，耐鹼，不易老化。
使用方法：先將基板鑽孔，然後把扎綫帶插入孔內，再將電綫扎緊即可。
Material: UL approved Nylon 66/94V-2, corrosion resistant, well insulation, difficult to aging.
Usage: Quick mounting one piece design securely attaches bundles to panel.


型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX. BUNDLE DIA. MM		承受力 TENSILE STRENGTH		孔徑(φ) HOLE DIA.		板厚厚度 PANEL THICKNESS	
	INCH	MM				LBS	KGS	INCH	MM	INCH	MM
PM-100	4"	100	2.5	25		18	8.0	0.189	4.8	0.094	2.4
PM-150	6"	155	3.6	35		40	18	0.181	4.6	0.091	2.3
PM-200	8"	200	4.8	50		50	22	0.236	6.0	0.118	3.0

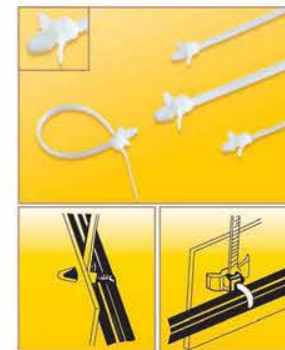

電源束綫帶
WIRE COLLECT TIE

材質：PE
用途：捆綁電綫作包裝用，可重複使用。
Material: PE
Usage: Wrap electrical cords for shipping and packaging. Inexpensive and Reusable.

型號 ITEM NO.	長L		寬W MM	(最大)捆扎範圍 MAX. BUNDLE DIA. MM		承受力 TENSILE STRENGTH	
	INCH	MM				LBS	KGS
WC-100	4"	100	=	25		18	8
WC-120	5.7"	145	=	40		30	14
WC-150	6.7"	170	=	50		30	14





粘合衝型粘扣帶 (塑膠粘合)
可重複使用的臨時工具，粘合力，承受力強。
DIE-CUT CABLE TIE(AGGLUTINATION)
Reusable hook and loop cable ties, idea for temporary applications, strong and durable.



型號 ITEM NO.	長L		寬W MM	包裝 PACKING
	INCH	MM		
HL-12×125	5"	125	12	10pcs
HL-12×150	6"	150	12	
HL-12×200	8"	200	12	
HL-13×240	9.4"	240	13	
HL-21×250	10"	250	21	

接合衝型粘扣帶 (超聲波焊接)
可重複使用的臨時工具，粘合力，承受力強。
DIE-CUT CABLE TIE(ULTRASONIC WELDING)
Reusable hook and loop cable ties, idea for temporary applications, strong and durable.



A+B接合衝型綁帶動 A+B DIE-CUT CABLE TIE(ULTRASONIC WELDING)				
型號 ITEM NO.	長L		寬W MM	包裝 PACKING
	INCH	MM		
MG-10×180	7"	180	10	20pcs
MG-15×250	10"	250	15	

注：專業廠加工製造，可依客戶尺寸樣式，配合開模製作
Note: Customer can select required products, according to their actual requirements.



材質：採用UL認可尼龍66料制成，防火等級94V-2，耐酸，耐鹼，不易老化。
使用方法：先將基板鑽孔，然後把扎線帶插入孔內，再將電線扎緊即可。
Material: UL approved Nylon 66/94V-2, corrosion resistant, well insulation, difficult to aging.
Usage: Quick mounting one piece design securely attaches bundles to panel.

型號 ITEM NO.	紙/套 PCS/SET	套/箱 SET/CTN	外箱尺寸 MEAS CM	毛重/淨重 G.W./N.W KGS	包裝 PACK/NG
HL-12×125	10	200	40×30×22	5/4	POLYBAG WITH CARD
HL-12×150	10	200	40×30×24	7/6	
HL-12×200	10	200	40×30×28	8/7	
HL-13×240	10	200	47×44×28	15/13	
HL-21×250	10	100	40×30×32	10/9	

型號 ITEM NO.	紙/套 PCS/SET	套/箱 SET/CTN	外箱尺寸 MEAS CM	毛重/淨重 G.W./N.W KGS	包裝 PACK/NG
MG-12×180	20	150	30×58×50	8/7	BLISTER WITH CARD
MG-15×250	20	150	38×55×48	15/14	



粘扣帶 (一般型) HOOK & LOOP TIE(FASTENING TAPE)

長度：每25米一卷。
幅寬：16、20、25、30、38、50、75、100、125mm，并可依客戶需求剪裁。
length: 25mm per roll.
width: 12.5,16,20,25,30,38,50,75,100mm.

包裝方式如下表如示 PACKING DETAILS

型號 ITEM NO.	寬度 WIDTH	每卷長度 YARD/ROLL	每箱總數 ROLL/CASE	每箱總長度 QUANTITY
HLR-12.5	12.5mm	27.5y/r	60r	1650y
HLR-16	16mm	27.5y/r	60r	1650y
HLR-20	20mm	27.5y/r	50r	1375y
HLR-25	25mm	27.5y/r	40r	1100y
HLR-30	30mm	27.5y/r	32r	880y
HLR-38	38mm	27.5y/r	28r	770y
HLR-50	50mm	27.5y/r	20r	550y
HLR-75	75mm	27.5y/r	14r	385y
HLR-100	100mm	27.5y/r	10r	275y

基本色共35色，交貨準確，服務快速。粘扣帶因面毛面的材質差異大(因面毛面厚薄)易產生色差，面邊和帶身因組織不同，在染整上色時，也有所不同，一般對色率以80%為可接受之標準。

35 standard colors are available for our Hook&loop ties. Because it is different to organize, different to some extent while dying, generally regarding 80% as the acceptable standard to the color rate.





BT-1 - BT-2 扎帶槍

快速將束帶拉緊并切斷。適用束帶寬度為2.4mm - 4.8mm
材質：塑料製。



BT-1 BT-2 TIE GUN

For fast and safe tensioning and cutting the cable ties off from 2.4mm to 4.8mm
Material: Plastic.



BT-1

BT-3 扎帶槍

快速將束帶拉緊并切斷。適用束帶寬度為2.4mm - 4.8mm
材質：金屬製。

BT-3 TIE GUN

For fast, safe tensioning and cut-off of cable tie form 2.4mm to 4.8mm
Material: steel



BT-2

BT-4 扎帶槍

快速將束帶拉緊并切斷。適用束帶寬度為4.8mm - 13mm
材質：金屬製。

BT-4 TIE GUN

For fast, safe tensioning and cut-off of cable tie form 4.8mm to 13mm
Material: steel



BT-3

BT-4



PACKING

Packing of series A (polybag packing) A系列包裝





A1 POLYBAG + LABEL



A2 POLYBAG + HEADER CARD



A3 POLYBAG + COLOR PRINT



A4 OPP BAG + COLOR PRINT

规格 MM	外箱尺寸 CM	数量 BAG	内盒尺寸 CM	数量 BAG	毛/净重 KG
2.5×60	47×42×32	600	40×22×31	300	11/10
2.5×80	47×44×32	600	42×22×31	300	12/11
2.5×100	47×42×32	500	40×22×32	250	14/13
2.5×120	47×44×32	500	42×22×31	250	19/18
2.5×150	53×48×35	500	46×25×34	250	23/22
2.5×160	53×48×35	500	46×25×34	250	24/23
2.5×200	43×42×32	250	40×22×31	125	15/14
3.6×140	47×42×32	250	40×22×31	125	16/15
3.6×150	47×44×32	250	42×22×31	125	17/16
3.6×200	47×44×32	200	42×22×31	100	17/16
3.6×250	51×48×30	200	46×24×29	100	21/20
3.6×280	47×42×32	150	40×22×31	75	21/20
3.6×300	47×44×32	150	42×22×31	75	22/21
3.6×370	47×44×32	100	42×22×31	50	18/17
4.8×120	47×44×32	200	42×22×31	100	17/16
4.8×160	43×42×32	150	40×22×31	75	16/15
4.8×180	47×42×32	150	42×22×31	75	16/15
4.8×200	47×44×32	150	42×22×31	75	17/16
4.8×250	43×42×32	100	40×20×31	50	17/16
4.8×280	47×42×32	100	40×22×31	50	20/19
4.8×300	47×42×32	100	40×22×31	50	21/20
4.8×350	47×44×32	100	40×22×31	50	23/22
4.8×380	51×48×30	100	46×24×29	50	25/24
4.8×400	52×49×32	100	40×23×31	50	27/26
4.8×430	54×49×32	100	52×23×31	50	28/27
4.8×450	56×49×32	100	54×23×31	50	29/28
4.8×500	60×34×25	50	58×16×24	25	16/15
7.2×150	47×44×32	100	42×22×31	50	14/13
7.2×200	51×48×30	100	46×24×29	50	20/19
7.2×250	43×42×32	50	40×22×31	25	15/14
7.2×300	47×42×32	50	40×22×31	25	16/15
7.2×350	47×44×32	50	42×22×31	25	20/19
7.2×380	51×48×30	50	46×24×29	25	21/20
7.2×400	54×47×32	50	52×22×31	25	22/21
7.2×450	56×49×32	50	54×23×31	25	24/23
7.2×500	60×32×25	24	58×15×24	12	13/13
7.2×550	65×32×25	24	63×15×31	12	14/13
9.0×400	54×49×32	30	52×23×31	15	22/21
9.0×450	58×42×25	20	56×20×24	10	18/17
9.0×500	60×40×25	20	58×19×24	10	19/18
9.0×550	65×40×25	20	63×19×24	10	20/19
9.0×600	70×34×15	10	68×16×14	5	12/11
9.0×650	75×34×15	10	73×15×14	5	13/12
9.0×700	80×34×15	10	78×16×14	5	14/13
9.0×750	85×34×15	10	83×16×14	5	15/14
9.0×800	90×34×15	10	88×16×14	5	16/15
9.0×900	100×34×15	10	98×16×14	5	18/17
9.0×1000	110×34×15	10	108×16×14	5	19/18
9.0×1100	120×34×15	10	118×16×14	5	21/20
9.0×1200	130×34×15	10	128×16×14	5	23/22
12×650	75×34×24	10	73×16×23	5	16/15
12×900	100×34×25	10	98×16×24	5	23/22

Packing Of Series B (assorted Polybag Packing)

B系列包装





B1-40

40PCS PACKING

ITEM NO.	B1-40		
DETAIL	3.6×150MM	6"	40LBS 20PCS
MEAS	4.8×200MM	8"	50LBS 20PCS
QTY	200SETS/CTN (100SETS/INNER BOX)		
G.W/N.W	10/8KG		



B2-75

75PCS PACKING

ITEM NO.	B2-75		
DETAIL	2.5×100MM	4"	18LBS 25PCS
	2.5×150MM	6"	18LBS 25PCS
	3.6×200MM	8"	40LBS 25PCS
G.W/N.W	50×30×30CM		
QTY	200SETS/CTN (50 SETS/INNER BOX)		
G.W/N.W	12/11KG		



B3-75

75PCS PACKING

ITEM NO.	B3-75		
DETAIL	2.5×150MM	6"	18LBS 25PCS
	2.5×200MM	8"	18LBS 25PCS
	3.6×250MM	10"	40LBS 25PCS
MEAS	50×30×30CM		
QTY	120SETS/CTN (60SETS/INNER BOX)		
G.W/N.W	10/9KG		



B4-75

75PCS PACKING

ITEM NO.	B4-75		
DETAIL	2.5×100MM	4"	18LBS 25PCS
	2.5×150MM	6"	18LBS 25PCS
	2.5×200MM	8"	40LBS 25PCS
MEAS	45×30×30CM		
QTY	200SETS/CTN (100SETS/INNER BOX)		
G.W/N.W	12/11KG		



B5-75

75PCS PACKING

ITEM NO.	B5-75		
DETAIL	2.5×100MM	4"	18LBS 25PCS
	4.8×120MM	4.7"	50LBS 25PCS
	4.8×200MM	8"	50LBS 25PCS
MEAS	52×32×34CM		
QTY	200SETS/CTN (50SETS/INNER BOX)		
G.W/N.W	14/12KG		

60PCS PACKING

ITEM NO.	B6-60		
DETAIL	2.5×100MM	4"	18LBS 20PCS
	3.6×150MM	6"	40LBS 20PCS
	4.8×200MM	8"	50LBS 20PCS
MEAS	52×30×30CM		
QTY	200SETS/CTN (100SETS/INNER BOX)		
G.W/N.W	10/8KG		



B6-60

250PCS PACKING

ITEM NO.	B7-250		
DETAIL	2.5×100MM	4"	18LBS 160PCS
	4.8×200MM	8"	50LBS 40PCS
	7.2×200MM	8"	120LBS 10PCS
	4.8×300MM	12"	50LBS 30PCS
	7.2×300MM	12"	120LBS 10PCS
MEAS	41×37×32CM		
QTY	50 SETS/CTN		
G.W/N.W	14/13KGS		



B7-250





B8-60

60PCS PACKING

ITEM NO.	B8-60		
	2.5×100MM	4"	18LBS 30PCS
DETAIL	2.5×150MM	6"	18LBS 15PCS
	2.5×200MM	8"	18LBS 15PCS
MEAS	45×30×30CM		
QTY	240SETS/CTN (120SETS/INNER BOX)		
G.W/N.W	8/7KG		



B9-150

150PCS PACKING

ITEM NO.	B9-150		
	2.5×100MM	4"	18LBS 50PCS
DETAIL	4.8×120MM	4.7"	50LBS 50PCS
	4.8×200MM	8"	50LBS 50PCS
MEAS	60×40×40CM		
QTY	120SETS/CTN (60SETS/INNER BOX)		
G.W/N.W	17/15KG		



B10-200

200PCS PACKING

ITEM NO.	B10-200		
DETAIL	2.5×100MM	4"	18LBS 200PCS
MEAS	40×30×30CM		
QTY	120SETS/CTN (60SETS/INNER BOX)		
G.W/N.W	9/7KG		

Packing Of Series C (PET Canister Packing Assorted Pe Box Packing) C系列包裝





C1-1200

1200PCS PACKING

ITEM NO.	C1-1200			
	2.5×100MM	4"	18LBS	600PCS
	3.6×150MM	6"	40LBS	200PCS
DETAIL	4.8×200MM	8"	50LBS	300PCS
	4.8×280MM	11"	50LBS	100PCS
MEAS	50×38×33CM			
QTY	12SETS/CTN 5544 SETS/20' CONTAINER			
G.W/N.W	14/13KG			
CANISTER	DIA: Φ12CM, HEIGHT: 31CM			



C2-901

901PCS PACKING

ITEM NO.	C2-901			
	2.5×100MM	4"	18LBS	500PCS
	3.6×150MM	6"	40LBS	200PCS
DETAIL	3.6×180MM	7"	40LBS	100PCS
	4.8×200MM	8"	50LBS	100PCS
	CABLE CLUTTER 5" 1PC			
MEAS	51×38×46CM			
QTY	24SETS/CTN (12SETS/INNER BOX) 7920 SETS/20' CONTAINER			
G.W/N.W	17/15KG			
CANISTER	DIA: Φ12CM, HEIGHT: 21CM			



C3-1000

1000PCS PACKING

ITEM NO.	C3-1000			
	2.5×100MM	4"	18LBS	400PCS
	2.5×150MM	6"	18LBS	300PCS
DETAIL	3.6×200MM	8"	40LBS	200PCS
	4.8×300MM	12"	50LBS	100PCS
MEAS	52×42×32CM			
QTY	20SETS/CTN 7220 SETS/20' CONTAINER			
G.W/N.W	16/14KG			
CANISTER	DIA: Φ10CM, HEIGHT: 31CM			



ITEM NO.	C4-650			
	2.5×100MM	4"	18LBS	500PCS
DETAIL	4.8×200MM	8"	50LBS	150PCS
MEAS	42×32×46CM			
QTY	24SETS/CTN 8760 SETS/20' CONTAINER			
G.W/N.W	13/11KG			
CANISTER	DIA: Φ10CM, HEIGHT: 21CM			



C4-650

450PCS PACKING

ITEM NO.	C5-450			
	2.5×100MM	4"	18LBS	200PCS
DETAIL	4.8×200MM	8"	50LBS	200PCS
	4.8×280MM	11"	50LBS	50PCS
MEAS	52×42×23CM			
QTY	20SETS/CTN 11200 SETS/20' CONTAINER			
G.W/N.W	14/12KG			
CANISTER	DIA: Φ10CM, HEIGHT: 21CM			



C5-450

801PCS PACKING

ITEM NO.	C6-801			
	2.5×100MM	4"	18LBS	500PCS
	3.6×150MM	6"	40LBS	200PCS
DETAIL	4.8×200MM	8"	50LBS	100PCS
	TIE GLIN BT-1 1PC			
MEAS	47×36×26CM			
QTY	12SETS/CTN 7104 SETS/20' CONTAINER			
G.W/N.W	11/10			
CANISTER	DIA: Φ11.3CM, HEIGHT: 24.5CM			



C6-801



C7-500

500PCS PACKING

ITEM NO.	C7-500			
DETAIL	2.5×100MM 4"	18LBS	350PCS	
	2.5×140MM 6"	18LBS	50PCS	
	2.5×160MM 6"	18LBS	50PCS	
	4.8×200MM 8"	50LBS	30PCS	
	4.8×280MM 11"	50LBS	20PCS	
MEAS	46×37×22CM			
QTY	20SETS/CTN 13500 SETS/20' CONTAINER			
G.W/N.W	15/13KG			
CANISTER	DIA: Φ9CM/HEIGHT:21CM			



C8-250

250PCS PACKING

ITEM NO.	C8-250			
DETAIL	2.5×100MM 4"	18LBS	50PCS	
	3.6×150MM 6"	40LBS	50PCS	
	4.8×200MM 8"	50LBS	150PCS	
MEAS	34×28×28			
QTY	12SETS/CTN 20480 SETS/20' CONTAINER			
G.W/N.W	8/7 KGs			
CANISTER	DIA: Φ6.5CM/HEIGHT:27CM			



C9-300

300PCS PACKING

ITEM NO.	C9-300			
DETAIL	2.5×100MM 4"	18LBS	200PCS	
	3.6×200MM 8"	40LBS	100PCS	
MEAS	46×39×22CM			
QTY	30SETS/CTN 21000 SETS/20' CONTAINER			
G.W/N.W	9/8KG			
KEEVE	DIA: Φ7.5CM/HEIGHT:21CM			



200PCS PACKING				
ITEM NO.	C10-200			
DETAIL	2.5×100MM 4"	18LBS	100PCS	
	3.6×200MM 8"	40LBS	100PCS	
MEAS	34×28×22CM			
QTY	30SETS/CTN 38400 SETS/20' CONTAINER			
G.W/N.W	10/8KG			
KEEVE	DIA: Φ5.5CM/HEIGHT:21CM			



C10-200

800PCS PACKING

ITEM NO.	C11-200			
DETAIL	2.5×100MM 4"	18LBS	300PCS	
	2.5×120MM 4.7"	18LBS	200PCS	
	2.5×150MM 6"	18LBS	200PCS	
	2.5×200MM 8"	18LBS	100PCS	
MEAS	50×25×29CM			
QTY	12SETS/CTN 9504 SETS/20' CONTAINER			
G.W/N.W	7/6KG			
PE BOX	L×W×H 12×16×14CM			



C11-800

1800PCS PACKING

ITEM NO.	C12-1800			
DETAIL	Cable Tie 4" 6" 8" 12"		1740PCS	
	Hook & Loop Tie 6" 8"		50PCS	
	Cable Tie Mount 25×25MM		10PCS	
MEAS	37×56×30CM			
QTY	6SET/CTN 3024 SETS/20' CONTAINER			
G.W/N.W	10/8KG			
PE BOX	L×W×H 36×28×8CM			



C12-1800

1600PCS PACKING

ITEM NO.	C13-1600			
DETAIL	2.5X100MM 4"	18LBS	1050PCS	
	3.6X150MM 6"	40LBS	150PCS	
	4.8X200MM 8"	50LBS	350PCS	
	4.8X280MM 11"	50LBS	50PCS	
QTY	6 SETS/CTN 3024 SETS/20' CONTAINER			
G.W/N.W	13/12KGS			
MEAS:	37X56X30CM			
PE BOX Size:	36X28X8CM			



C13-1600



C14-200

200PCS PACKING

ITEM NO.	C14-200			
DETAIL	2.5X100MM	4"	18LBS	100PCS
	3.6X200MM	8"	40LBS	100PCS
QTY	52 SETS/CTN 31200 SETS/20' CONTAINER			
G.W/N.W	9/8KGS			
MEAS:	57x26x28 CM			
PET TUBE Size:	5X5X24 CM			



C15-500

500PCS PACKING

ITEM NO.	C15-500			
DETAIL	2.5X100MM	4"	18LBS	400PCS
	3.6X200MM	8"	40LBS	100PCS
QTY	30 SETS/CTN 26400 SETS/20' CONTAINER			
G.W/N.W	7/6KGS			
MEAS:	40x34x22 CM			
PET TUBE Size:	6.5X6.5X21 CM			



C16-250

250PCS PACKING

ITEM NO.	C16-250			
DETAIL	2.5X100MM	4"	18LBS	50PCS
	2.5X150MM	6"	18LBS	50PCS
DETAIL	3.6X200MM	8"	40LBS	150PCS
	3.6X200MM	8"	40LBS	150PCS
QTY	30 SETS/CTN 26400 SETS/20' CONTAINER			
G.W/N.W	6/5KGS			
MEAS:	40x34x22 CM			
PET TUBE Size:	6.5X6.5X21 CM			



C17-300

300PCS PACKING

ITEM NO.	C17-300			
DETAIL	2.5X100MM	4"	18LBS	100PCS
	3.6X150MM	6"	40LBS	100PCS
DETAIL	4.8X200MM	8"	50LBS	100PCS
	4.8X200MM	8"	50LBS	100PCS
QTY	30 SETS/CTN 24600 SETS/20' CONTAINER			
G.W/N.W	7/6KGS			
MEAS:	43X36X22CM			
PET TUBE Size:	7X7X21 CM			



400PCS PACKING				
ITEM NO.	C18-400			
DETAIL	2.5X100MM	4"	18LBS	200PCS
	3.6X150MM	6"	40LBS	100PCS
DETAIL	4.8X200MM	8"	50LBS	100PCS
	4.8X200MM	8"	50LBS	100PCS
QTY	30 SETS/CTN 21000 SETS/20' CONTAINER			
G.W/N.W	10/9KGS			
MEAS:	46X39X22CM			
PET TUBE Size:	7.5X7.5X21CM			



C18-400

500PCS PACKING				
ITEM NO.	C19-500			
DETAIL	2.5X100MM	4"	18LBS	200PCS
	3.6X150MM	6"	40LBS	100PCS
DETAIL	3.6X200MM	8"	40LBS	100PCS
	4.8X200MM	8"	50LBS	100PCS
QTY	20 SETS/CTN 13500 SETS/20' CONTAINER			
G.W/N.W	9/8KGS			
MEAS:	46X37X24CM			
PET TUBE Size:	9X9X22.5CM			



C19-500

650PCS PACKING				
ITEM NO.	C20-650			
DETAIL	2.5X100MM	4"	18LBS	500PCS
	4.8X200MM	8"	50LBS	150PCS
QTY	20 SETS/CTN 13500 SETS/20' CONTAINER			
G.W/N.W	9/8KGS			
MEAS:	46X37X24CM			
PET TUBE Size:	9X9X22.5CM			



C20-650

1000PCS PACKING				
ITEM NO.	C21-1000			
DETAIL	2.5X100MM	4"	18LBS	500PCS
	3.6X150MM	6"	40LBS	200PCS
DETAIL	3.6X200MM	8"	40LBS	200PCS
	4.8X300MM	12"	50LBS	100PCS
QTY	20 SETS/CTN 7220 SETS/20' CONTAINER			
G.W/N.W	16/15KGS			
MEAS:	52X42X32CM			
PET TUBE Size:	10X10X31CM			



C21-1000



2 KITS IN ONE

600PCS CABLE TIE KIT

2 KITS IN ONE

Unique case allows both sides to be opened at the same time.
Folds closed for easy storage.

KIT INCLUDES:

- Cable Clamps
- Cable Tie Mounts
- Cable Tie Gun
- Long Nose Wire Stripper
- Cable Ties
- Spiral Wrap
- Insulating Tape



2 KITS IN ONE

400PCS AUTOMOTIVE ELECTRICAL REPAIR KIT

2 KITS IN ONE

Unique case allows both sides to be opened at the same time.
Folds closed for easy storage.

KIT INCLUDES:

- Wire Stripper Terminal Crimper Tool
- Long nose pliers & Cutter Tool
- DC Voltage Tester
- Screwdrivers With Insulated Shafts
- Electrical Tape
- Assorted Wire Clamps
- Fuse Puller
- Assorted Automotive Fuses
- Twist-On Wire Nuts
- Wire Ties
- Assorted Hook & Loop Ties
- Insulated Solderless Terminals Multi Gauge
- Quick Splices



2 KITS IN ONE

Packing Of Series D (blister Packing With Card Double Blister Packing)

D系列包装





D1-200

200PCS PACKING

ITEM NO.	D1-200			
DETAIL	2.5×100MM	4"	18LBS	200PCS
MEAS	61×37×38CM			
QTY	100SETS/CTN (25SETS/INNER BOX)			
G.W/N.W	11/9KG			



D2-75

75PCS PACKING

ITEM NO.	D2-75			
DETAIL	2.5×100MM	4"	18LBS	25PCS
DETAIL	2.5×150MM	6"	18LBS	25PCS
DETAIL	3.6×200MM	8"	40LBS	25PCS
MEAS	61×37×38CM			
QTY	100SETS/CTN (25SETS/INNER BOX)			
G.W/N.W	12/10KG			



D3-75

75PCS PACKING

ITEM NO.	D3-75			
DETAIL	2.5×100MM	4"	18LBS	25PCS
DETAIL	4.8×120MM	4.7"	50LBS	25PCS
DETAIL	4.8×185MM	7.3"	50LBS	25PCS
MEAS	56×33×43CM			
QTY	80SETS/CTN (20SETS/INNER BOX)			
G.W/N.W	13/11KG			



D4-30

30PCS PACKING

ITEM NO.	D4-30			
DETAIL	3.6×150MM	6"	40LBS	30PCS
MEAS	50×45×40CM			
QTY	400SETS/CTN (100SETS/INNER BOX)			
G.W/N.W	15/13KG			



D5-150

150PCS PACKING

ITEM NO.	D5-150			
DETAIL	2.5×100MM	4"	18LBS	50PCS
DETAIL	2.5×150MM	6"	18LBS	50PCS
DETAIL	3.6×200MM	8"	40LBS	50PCS
MEAS	54×32×32CM			
QTY	80SETS/CTN (20SETS/INNER BOX) 39760SET/20' CONTAINER			
G.W/N.W	9/7KG			

300PCS PACKING

ITEM NO.	D6-300			
DETAIL	2.5×100MM	4"	18LBS	150
DETAIL	3.6×150MM	6"	40LBS	50
DETAIL	4.8×200MM	8"	50LBS	50
DETAIL	4.8×280MM	11"	50LBS	50
MEAS	46×36×24CM			
QTY	20SETS/CTN (10SETS/INNER BOX) 13500 SET/20' CONTAINER			
G.W/N.W	6/5KG			

1500PCS PACKING

ITEM NO.	D7-1500			
DETAIL	2.5×100MM	4"	18LBS	800PCS
DETAIL	3.6×150MM	6"	40LBS	200PCS
DETAIL	4.8×200MM	8"	50LBS	400PCS
DETAIL	4.8×280MM	11"	50LBS	100PCS
MEAS	57×26×44CM			
QTY	10SETS/CTN 4200 SETS/20' CONTAINER			
G.W/N.W	13/11KG			
DOUBLE BLISTER SIZE	40×30×6CM			



D6-300



D7-1500



D8-1000

1000PCS PACKING

ITEM NO.	D8-1000			
DETAIL	2.5X100MM	4"	18LBS	300PCS
	2.5X120MM	4.7"	18LBS	300PCS
	3.6X150MM	6"	40LBS	150PCS
	3.6X180MM	7"	40LBS	100PCS
	3.6X200MM	8"	40LBS	80PCS
	4.8X250MM	10"	50LBS	50PCS
MEAS	44X30X52CM			
QTY	12SETS/CTN 4800 SETS/20' CONTAINER			
G.W/N.W	14/12KG			
DOUBLE BLISTER SIZE	36X22X4.5CM			



D9-1350

1350PCS PACKING

ITEM NO.	D9-1350			
DETAIL	2.5X100MM	4"	18LBS	800PCS
	3.6X150MM	6"	40LBS	150PCS
	4.8X200MM	8"	50LBS	350PCS
	4.8X300MM	12"	50LBS	50PCS
MEAS	63X31X45CM			
QTY	10 SETS/CTN 3100 SETS/20' CONTAINER			
G.W/N.W	10/10 KGS			
DOUBLE BLISTER SIZE	43X29X6CM			



D10-2300

2300PCS PACKING

ITEM NO.	D10-2300			
DETAIL	2.5X100MM	4"	18LBS	1750PCS
	3.6X150MM	6"	40LBS	200PCS
	4.8X200MM	8"	50LBS	325PCS
	4.8X280MM	11"	50LBS	25PCS
MEAS	40X32X48CM			
QTY	6SETS/CTN 2700 SETS/20' CONTAINER			
G.W/N.W	8/7KG			
DOUBLE BLISTER SIZE	46X29X6CM			



1000PCS PACKING				
ITEM NO.	D11-1000			
DETAIL	2.5X100MM	4"	18LBS	600PCS
	3.6X150MM	6"	40LBS	200PCS
	3.6X200MM	8"	40LBS	200PCS
QTY	16 SETS/CTN(8 SET/INNER) 9360 SETS/20' CONTAINER			
G.W/N.W	13/12KGS/CTN			
MEAS:	44X43X39CM			
Blister Size:	36.5X20X5CM			



D11-1000

650PCS PACKING

ITEM NO.	D12-650			
DETAIL	2.5X100MM	4"	18LBS	300PCS
	3.6X200MM	8"	40LBS	200PCS
	4.8X280MM	11"	50LBS	150PCS
QTY	16 SETS/CTN(8 SET/INNER) 8480 SETS/20' CONTAINER			
G.W/N.W	7/6KGS			
MEAS:	51X43X39CM			
Blister Size:	36.5X23X5CM			



D12-650

500PCS PACKING

ITEM NO.	D13-500			
DETAIL	2.5X100MM	4"	18LBS	200PCS
	3.6X150MM	6"	40LBS	100PCS
	3.6X200MM	8"	40LBS	100PCS
	4.8X250MM	10"	50LBS	50PCS
	4.8X280MM	11"	50LBS	50PCS
QTY	16 SETS/CTN(8 SET/INNER) 8480 SETS/20' CONTAINER			
G.W/N.W	8/7KGS			
MEAS:	51X43X39CM			
Blister Size:	36.5X23X5CM			



D13-500

600PCS PACKING

ITEM NO.	D14-600			
DETAIL	2.5X100MM	4"	18LBS	200PCS
	3.6X150MM	6"	40LBS	200PCS
	3.6X200MM	8"	40LBS	200PCS
QTY	16 SETS/CTN(8 SETS/INNER) 9504 SETS/20' CONTAINER			
G.W/N.W	7/6KGS			
MEAS:	49X39X25 CM			
Blister Size:	36.5X23X3CM			



D14-600



D15-650

650PCS PACKING

ITEM NO.	D15-650			
DETAIL	2.5X100MM	4"	18LBS	300PCS
	2.5X200MM	8"	18LBS	100PCS
	3.6X150MM	6"	40LBS	100PCS
	3.6X200MM	8"	40LBS	150PCS
QTY	16 SETS/CTN(8 SETS/INNER)			
	9504 SETS/20' CONTAINER			
G.W/N.W	12/11KGS			
MEAS:	49X39X25 CM			
Blister Size:	36.5X23X3CM			



D16-500

500PCS PACKING

ITEM NO.	D16-500			
DETAIL	2.5X100MM	4"	18LBS	250PCS
	4.8X190MM	6"	50LBS	200PCS
	4.8X280MM	11"	50LBS	50PCS
QTY	16 SETS/CTN(8 SETS/INNER)			
	8480 SETS/20' CONTAINER			
G.W/N.W	13/12KGS			
MEAS:	51X43X39 CM			
Blister Size:	36X22X5 CM			



D17-1200

1200PCS PACKING

ITEM NO.	D17-1200			
DETAIL	2.5X100MM	4"	18LBS	1200PCS
QTY	40 SETS/CTN(10 SETS/INNER)			
	11000 SETS/20' CONTAINER			
G.W/N.W	14/13KGS			
MEAS:	54x46x43 CM			
PET Blister Size:	22X20X5 CM			



D18-200

200PCS PACKING

ITEM NO.	D18-200			
DETAIL	2.5X100MM	4"	18LBS	100PCS
	2.5X150MM	6"	18LBS	50PCS
	3.6X200MM	8"	40LBS	50PCS
QTY	80 SETS/CTN(20 SETS/INNER)			
	39760 SETS/20' CONTAINER			
G.W/N.W	10/9KGS			
MEAS:	54x32x32 CM			
Blister Size:	7X2.5X24 CM			



Metallic Cable Tie Bundler Cable Tie Bundler 金屬捆扎機/尼龍捆扎機





Cable Tie Bundler: BT-15100



Metallic Cable Tie Bundler: BT-12100M



The **CABLE TIE BUNDLER** helps you complete thousands of jobs quickly and easily.
No need to use tangled rope, messy tie wraps, or sticky tape!

You can use the **CABLE TIE BUNDLER** for:



- Garbage bags
- Gardening
- Luggage
- Shipping
- Storage
- Automotive
- Tools
- Electrical
- Crafts
- Security
- Camping
- Biking

Thousands of other
uses for home,
work and sport!



Clip Loading Procedure

- Take out the belt from the body. Hold the body and both sides of the pusher, carefully pull it out from the body.
- Insert the clip stick into the front end of the body completely, and then pull it out to load the clip into the body.
- Put the pusher back.
- Push the lever once to complete installation. A clip will come out from the body. Then the binder can perform twenty times without reloading clip.

Usage

- Pull out the belt from the front end of the body as shown in the diagram. (The belt will come out through the clip.) Do not touch the lever at this moment.
- Wrap the belt around the object from below, and insert the belt into the clip completely. It makes a clatter sound once insert the belt properly. (The irregular surface of the belt is outward then.)
- Position the binder against the object to be bound, and pull the belt without moving the binder. If press the lever at the moment, the belt will be cut off before tighten.
- Ensure that there is no looseness; push the lever to cut the belt. Move the binder away from the object to be bound while push the lever. Then the binding procedure is done.

Belt Replacement

- First, open the belt case as per the direction of the arrow.
- Take off the empty belt bobbin and wrap a new one round the bobbin as shown in the diagram.
- Close the case as per the direction of the arrow after wrapping up the belt, and pass belt through the main body, please read the instruction to get more detailed information about binding up.

Announcements

- The belt may become hard if it is dry. Moisten it to make it easy to use.
- The belt may break with excessive force.
- Ensure the belt mesh with the clip, and then pull on the belt. (Caution is required when use the binder at high locations.)

Proper Usage Procedure

Problem: The binder cannot be moved away from the object to be bounded. The binder cannot be moved away from the object to be bounded unless push the lever.

When reuse the separated clip, the object cannot be bounded if the clip are not oriented properly.

Blade Replacement



圖片 Picture	貨號 Item No	貨物描述 Description	包裝 Packing	包裝尺寸 Packing Size(mm)	重量/套 Weight G/Set	套/箱 Weight G/Ctn	套/箱 Set/ Ctn	C型尺寸 (顯示圖)尺寸 Measure(cm)	層/箱數/層 Layer/Ctn	箱/套/托 Ctn/Set /Pallet	托盤尺寸 Pallet Size(cm)	20GP	40GP
	BT-12100B	Plastic Belt Bundler 1Pcs Tool 100Pcs Clips 12Meters Plastic Belt	Double Blister Packing	Blister Size: 170x247x45	260g	1380	5	23.5X17X25	4 2X7+3X5	116/580	120X100X115	18 Pallet	40 Pallet
	BT-12A	12M Plastic Belt	Double Blister Packing	Blister Size: 120X170X40	107g	620	5	20X13X18	5 6X8	240/1200	120X100X104	18 Pallet	40 Pallet
	BT-100B	100Pcs Clips	Double Blister Packing	Blister Size: 70X235X19	47g	280	5	8X9X24	4 15X7+13X5+4	696/3480	120X100X112	18 Pallet	40 Pallet
	HC-12100	Plastic Belt Bundler 1Pc Tool 100Pcs Clips 12Meters Plastic Belt	Color Box Packing	Box Size: 165X240X45	300g	1630	5	24X18X24	4 4X3+4X4	112/560	120X100X112	18 Pallet	40 Pallet
	BT-24200	Plastic Belt Bundler 1Pcs Tool 2X100Pcs Clips 2X12Meters Plastic Belt	Double Blister Packing	Blister Size: 255X325X80	470g	2400	5	26X41X33	3 2X2+2X3	40/200	120X100X115	18 Pallet	40 Pallet
	BT-15100	Plastic Belt Bundler 1Pcs Tool 100Pcs Clips 12Meters Plastic Belt	Double Blister Packing	Blister Size: 225X325X80	340g	1790	5	40X18X32	3 5X3	45/225	120X100X115	18 Pallet	40 Pallet
	BT-12100AB	12M Plastic Belt 100Pcs Clips	Double Blister Packing	Blister Size: 195X270X75	180g	950	5	20X39X27	3 3X5	45/225	120X100X100	18 Pallet	40 Pallet

Double Blister Packing



Double Blister Packing



Pallet Packing



Color Box Packing



Double Blister Packing



圖片 Picture	貨號 Item No	貨物描述 Description	包裝 Packing	包裝尺寸 Packing Size(mm)	重量/套 Weight G/Set	Set/ Inner	Set/ Ctn	Inner Size (cm)	Carton Size (cm)	Weight KG/Ctn	20GP 套 Set	40GP 套 Set	40HQ 套 Set
	BT-12100B	Plastic Belt Bundler 1Pcs Tool 100Pcs Clips 12Meters Plastic Belt	Double Blister Packing	Blister Size: 170x247x45	260g	5	20	17X24X25	50X35X26	7/6	11400	24600	28000
	BT-12A	12M Plastic Belt	Double Blister Packing	Blister Size: 120X170X40	107g	5	40	20X13X18	42X38X28	6/5	23000	50000	57000
	BT-100B	100Pcs Clips	Double Blister Packing	Blister Size: 70X235X19	47g	10	100	16X9X24	47X34X25	6/5	65000	140000	160000
	HC-12100	Plastic Belt Bundler 1Pc Tool 100Pcs Clips 12Meters Plastic Belt	Color Box Packing	Box Size: 165X240X45	300g		28		50X35X33	9/8	12544	27020	30800
	BT-24200	Plastic Belt Bundler 1Pcs Tool 2X100Pcs Clips 2X12Meters Plastic Belt	Double Blister Packing	Blister Size: 255X325X80	470g	6	12	28X34X26	56X34X28	7/6	5856	12600	14400
	BT-15100	Plastic Belt Bundler 1Pcs Tool 100Pcs Clips 12Meters Plastic Belt	Double Blister Packing	Blister Size: 225X325X80	340g	6	12	26X34X23	54X36X24	5/4	7260	15600	17760
	BT-12100AB	12M Plastic Belt 100Pcs Clips	Double Blister Packing	Blister Size: 195X270X75	180g	6	24	21X28X28	50X42X30	6/5	9840	21120	24360



Double Blister Packing



Double Blister Packing



Stainless Steel Cable Ties Series

不銹鋼扎帶系列

不銹鋼扎帶-自鎖式
STAINLESS STEEL CABLE TIES-BALL LOCK TYPE

BEISIT



材料：採用不銹鋼201、304、316材質，各種長度皆可制作，特殊規格按客戶供機制作；
特性：耐酸、耐腐蝕、抗張强度高，使用簡單，快捷等優勢；
工作溫度範圍：-60°C-150°C。

All length are available, Stainless steel type: 201, 304, 316, Special sizes can be customized;
Characteristic: They have a unique ball locking mechanism that allow easily and quickly installed
and not undone, High tensile strength; Non-flammability High resistance to acetic acid,
alkali acid, sulphuric acid, corrode ...etc;
Working temperature: -60°C-150°C

規格型號 PART NO.	長度 APPROX. LENGTH MM(INCH)	寬度 APPROX. WIDTH MM(INCH)	捆綁直徑 MAX. BUNDLE DIA. MM(INCH)	拉力 MIN. LOOP TENSILE STRENGTH N(LBS)
BTC-4.6×150	150(5.9)	4.6(0.181)	37(1.46)	600(135)
BTC-4.6×200	200(7.87)		50(1.97)	
BTC-4.6×250	250(9.84)		63(2.48)	
BTC-4.6×300	300(11.8)		76(2.99)	
BTC-4.6×350	350(13.78)		89(3.5)	
BTC-4.6×400	400(15.75)		102(4.02)	
BTC-4.6×450	450(17.72)		115(4.53)	
BTC-4.6×500	500(19.69)		128(5.04)	
BTC-4.6×550	550(21.65)		141(5.55)	
BTC-4.6×600	600(23.62)		154(6.06)	
BTC-7.9×150	150(5.9)	7.9(0.311)	37(1.46)	800(180)
BTC-7.9×200	200(7.87)		50(1.97)	
BTC-7.9×250	250(9.84)		63(2.48)	
BTC-7.9×300	300(11.8)		76(2.99)	
BTC-7.9×350	350(13.78)		89(3.5)	
BTC-7.9×400	400(15.75)		102(4.02)	
BTC-7.9×450	450(17.72)		115(4.53)	
BTC-7.9×500	500(19.69)		128(5.04)	
BTC-7.9×550	550(21.65)		141(5.55)	
BTC-7.9×600	600(23.62)		154(6.06)	
BTC-7.9×650	650(25.59)	12(0.472)	167(6.57)	1200(270)
BTC-7.9×700	700(27.56)		180(7.09)	
BTC-7.9×750	750(29.53)		191(7.52)	
BTC-7.9×800	800(31.5)		193(7.59)	
BTC-12×200	200(7.87)		50(1.97)	
BTC-12×250	250(9.84)		63(2.48)	
BTC-12×300	300(11.8)		76(2.99)	
BTC-12×350	350(13.78)		89(3.5)	
BTC-12×400	400(15.75)		102(4.02)	
BTC-12×450	450(17.72)		115(4.53)	
BTC-12×500	500(19.69)		128(5.04)	
BTC-12×550	550(21.65)		141(5.55)	
BTC-12×600	600(23.62)		154(6.06)	
BTC-12×650	650(25.59)		167(6.57)	
BTC-12×700	700(27.56)		180(7.09)	



材料：採用不銹鋼201、304、316材質，各種長度皆可制作，特殊規格按客戶供樣制作；
特性：耐酸、耐腐蝕、抗強度高，L型突起式結構使得YF型扎帶具有簡單、快捷等優勢；
工作溫度範圍：-60℃-150℃。

All length are available, Stainless steel type: 201, 304, 316, Special sizes can be customized;
Characteristic: High tensile strength; Non-flammability; High resistance to acetic acid, alkali acid, sulphuric acid, corrode ...etc, Wing lock type has the advantage of easy-quick operation;
Working temperature: -60℃-150℃




規格型號 PART NO.	長度 APPROX. LENGTH MM(INCH)	寬度 APPROX. WIDTH MM(INCH)	捆綁直徑 MAX. BUNDLE DIA. MM(INCH)	拉力 MIN. LOOP TENSILE STRENGTH N(LBS)
BT-12x150	150(5.9)	12(0.47)	37(1.46)	1200(270)
BT-12x200	200(7.87)		50(1.97)	
BT-12x250	250(9.84)		63(2.48)	
BT-12x300	300(11.8)		76(2.99)	
BT-12x350	350(13.78)		89(3.5)	
BT-12x400	400(15.75)		102(4.02)	
BT-12x450	450(17.72)		115(4.53)	
BT-12x500	500(19.69)		128(5.04)	
BT-12x550	550(21.65)		141(5.55)	
BT-12x600	600(23.62)		154(6.06)	
BT-12x650	650(25.6)	15(0.59)	167(6.57)	1500(337)
BT-12x700	700(27.6)		180(7.09)	
BT-12x800	800(31.5)		193(7.59)	
BT-15x200	200(7.87)		50(1.97)	
BT-15x250	250(9.84)		63(2.48)	
BT-15x300	300(11.8)		76(2.99)	
BT-15x350	350(13.78)		89(3.5)	
BT-15x400	400(15.75)		102(4.02)	
BT-15x450	450(17.72)		115(4.53)	
BT-15x500	500(19.69)		128(5.04)	
BT-15x550	550(21.65)	15(0.59)	141(5.55)	1500(337)
BT-15x600	600(23.62)		154(6.06)	
BT-15x650	650(25.59)		167(6.57)	
BT-15x700	700(27.56)		180(7.09)	
BT-15x750	750(29.53)		191(7.52)	
BT-15x800	800(31.5)		193(7.59)	
BT-15x1000	1000(39.37)		206(8.11)	

材料：採用不銹鋼304、316材質，耐腐蝕單勾倒齒鎖緊扎帶，抗張力可達到60kg；
室內外適用，適用於通訊、電力、造船及輸油管道工程上應用。
工作溫度範圍：-60℃-150℃。

Material: stainless steel 304 & 316, High corrosion resistant, single barb-lock type,
Good loop tensile strength can touch 60kg;

Outdoor and indoor use, ideal for applying in telecommunication, electricity, shipbuilding and oil & gas industry;
Working temperature: -60℃-150℃

規格型號 PART NO.	長度 APPROX. LENGTH MM(INCH)	寬度 APPROX. WIDTH MM(INCH)	捆綁直徑 MAX. BUNDLE DIA. MM(INCH)	拉力 MIN. LOOP TENSILE STRENGTH N(LBS)
BT-7x150	150(5.9)	7(0.276)	33(1.3)	600(135)
BT-7x225	225(8.86)		57(2.2)	
BT-7x300	300(11.8)		81(3.2)	
BT-7x335	335(13.2)		92(3.6)	
BT-7x400	400(15.7)		113(4.4)	
BT-7x450	450(17.7)		129(5.1)	
BT-7x490	490(19.3)		141(5.6)	
BT-7x550	550(21.7)		161(6.3)	
BT-7x600	600(23.6)		176(6.9)	
BT-7x650	650(25.6)		192(7.6)	
BT-7x700	700(27.6)	12(0.472)	208(8.2)	1800(405)
BT-7x750	750(29.5)		224(8.8)	
BT-7x800	800(31.5)		240(9.4)	
BT-12x150	150(5.9)		33(1.3)	
BT-12x225	225(8.86)		57(2.2)	
BT-12x300	300(11.8)		81(3.2)	
BT-12x335	335(13.2)		92(3.6)	
BT-12x400	400(15.7)		113(4.4)	
BT-12x450	450(17.7)		129(5.1)	
BT-12x490	490(19.3)		141(5.6)	
BT-12x550	550(21.7)	12(0.472)	161(6.3)	1800(405)
BT-12x600	600(23.6)		176(6.9)	
BT-12x650	650(25.6)		192(7.6)	
BT-12x700	700(27.6)		208(8.2)	
BT-12x750	750(29.5)		224(8.8)	
BT-12x800	800(31.5)		240(9.4)	



採用不銹鋼304、316材質，耐腐蝕多重鎖緊扎帶，抗張力可達到250磅；
室內外適用，適用於通訊、電力、造船及輸油管道工程上應用。
工作溫度範圍：-60°C-150°C。

Material: stainless steel 304 & 316, High corrosion resistant, multi barb-lock type,


Good loop tensile strength can touch 250 lbs;

Outdoor and indoor use, ideal for applying in telecommunication, electricity, shipbuilding and oil & gas industry;

Working temperature: -60°C-150°C



規格型號 PART NO.	長度 APPROX. LENGTH MM(INCH)	寬度 APPROX. WIDTH MM(INCH)	捆綁直徑 MAX. BUNDLE DIA. MM(INCH)	拉力 MIN. LOOP TENSILE STRENGTH N(LBS)
BTD-7×150	150(5.9)	7(0.276)	33(1.3)	1120(252)
BTD-7×225	225(8.86)		57(2.2)	
BTD-7×300	300(11.8)		81(3.2)	
BTD-7×335	335(13.2)		92(3.6)	
BTD-7×400	400(15.7)		113(4.4)	
BTD-7×450	450(17.7)		129(5.1)	
BTD-7×490	490(19.3)		141(5.6)	
BTD-7×550	550(21.7)		161(6.3)	
BTD-7×600	600(23.6)		176(6.9)	
BTD-7×650	650(25.6)		192(7.6)	
BTD-7×700	700(27.6)	12(0.472)	208(8.2)	1800(405)
BTD-7×750	750(29.5)		224(8.8)	
BTD-7×800	800(31.5)		240(9.4)	
BTD-12×150	150(5.9)		33(1.3)	
BTD-12×225	225(8.86)		57(2.2)	
BTD-12×300	300(11.8)		81(3.2)	
BTD-12×335	335(13.2)		92(3.6)	
BTD-12×400	400(15.7)		113(4.4)	
BTD-12×450	450(17.7)		129(5.1)	
BTD-12×490	490(19.3)		141(5.6)	
BTD-12×550	550(21.7)		161(6.3)	
BTD-12×600	600(23.6)		176(6.9)	
BTD-12×650	650(25.6)		192(7.6)	
BTD-12×700	700(27.6)		208(8.2)	
BTD-12×750	750(29.5)		224(8.8)	
BTD-12×800	800(31.5)		240(9.4)	

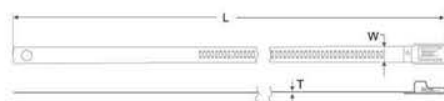



採用不銹鋼304、316材質，高強度可退式扎帶，簡單精準設計，使用方便
可重複使用，適用於電力、通訊、造船工業
工作溫度範圍：-60°C-150°C。

Material: stainless steel 304 & 316, High tensile strength, Unique buckle design for quick, easy application;

Reusable use, ideal for applying in electricity, telecommunication, shipbuilding industry;

Working temperature: -60°C-150°C

規格型號 PART NO.	長度 APPROX. LENGTH MM(INCH)	寬度 APPROX. WIDTH MM(INCH)	捆綁直徑 MAX. BUNDLE DIA. MM(INCH)	拉力 MIN. LOOP TENSILE STRENGTH N(LBS)
BTR-10×150	150(5.9)	10(0.39)	33(1.3)	1000(225)
BTR-10×190	190(7.5)		46(1.8)	
BTR-10×250	250(9.8)		65(2.6)	
BTR-10×300	300(11.8)		81(3.2)	
BTR-10×350	350(13.8)		97(3.8)	
BTR-10×400	400(15.7)		113(4.4)	
BTR-10×450	450(17.7)		129(5.1)	
BTR-10×490	490(19.3)		141(5.6)	
BTR-10×550	550(21.7)		161(6.3)	
BTR-10×600	600(23.6)		176(6.9)	
BTR-10×650	650(25.6)	12(0.472)	192(7.6)	1800(405)
BTR-10×700	700(27.6)		208(8.2)	

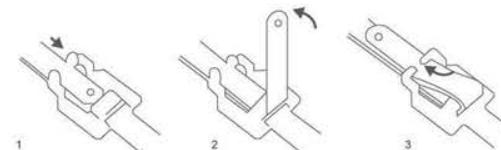


預裝式的不銹鋼扎帶：
可節省用戶30%的安裝時間；
無需專業工具安裝。

Steel tie with Ratchet-Lok banding buckle;
Dedicated for hose bundling;
Installed without professional tool.




型號 TYPE	規格(寬×長) SPECIFICATION (W×L)	厚度 THICKNESS	最大捆徑(φ) MAXI BUNDLED DIAMETER
BTRT-400A	10×400	0.40mm	100mm
BTRT-600A	10×600	0.40mm	180mm
BTRT-800A	10×800	0.40mm	230mm
BTRT-900A	10×900	0.40mm	280mm
BTRT-1000A	10×1000	0.40mm	300mm
BTRT-1100A	10×1100	0.40mm	330mm
BTRT-1200A	10×1200	0.40mm	380mm
BTRT-1300A	10×1300	0.40mm	400mm
BTRT-1400A	10×1400	0.40mm	430mm
BTRT-1500A	10×1500	0.40mm	457mm
BTRT-400B	20×400	0.40mm	100mm
BTRT-600B	20×600	0.40mm	180mm
BTRT-800B	20×800	0.40mm	230mm
BTRT-900B	20×900	0.40mm	280mm
BTRT-1000B	20×1000	0.40mm	300mm
BTRT-1100B	20×1100	0.40mm	330mm
BTRT-1200B	20×1200	0.40mm	380mm
BTRT-1300B	20×1300	0.40mm	400mm
BTRT-1400B	20×1400	0.40mm	430mm
BTRT-1500B	20×1500	0.40mm	457mm

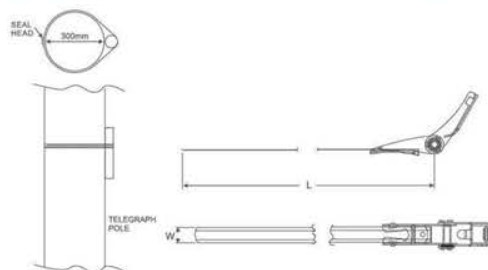

- 材質及特點: 採用尼龍66材料製成, 具有絕緣性能好, 難燃性, 操作方便, 省工省本等特點。
- 扎帶使用環境溫度: 25°C~60°C, 抗拉強度符合標準要求。
- Material and Features: made from nylon 66, steel inlay, good insulation, fire resistance, easy operation, time saving, etc.
- Temperature: 25°C~60°C standard tensile strength

型號 TYPE	規格(寬×長) SPECIFICATION (W×L)	有效長度 EFFECTIVE LENGTH (MM)	最大捆綁範圍 THE MAXIMUM BINDING RANGE	承受力N WITH STAND FORCE N	包裝(皮/袋) PACKING: PCS/BAG
NZ-1	3×100	80	25	50	200
NZ-1	4×150	120	35	150	100
NZ-1	4×200	170	50	150	100
NZ-1	5×250	200	65	150	100
NZ-1	5×300	115	80	150	100
NZ-1	8×145	260	35	250	100
NZ-1	8×175	145	45	250	100
NZ-1	8×200	170	50	250	100
NZ-1	8×240	200	60	250	100
NZ-1	8×300	260	80	250	100
NZ-1	8×400	360	110	250	100
NZ-1	10×300	260	80	500	100
NZ-1	10×350	310	95	500	100
NZ-1	10×400	360	110	500	100
NZ-1	10×450	410	130	500	100
NZ-1	10×550	510	160	500	100
NZ-1	10×600	560	175	500	100





材質：不銹鋼材質，各種長度皆可制作，接受合理的OEM；
特性：耐酸、耐腐蝕、不易燃燒、抗張强度高；
工作溫度範圍：-60°C-150°C；
適用於一般的戶外環境捆扎應用；
配合多種不銹鋼扎扣的使用；
通常用紙盒或者耐用的塑料盒包裝，方便使用。

High resistance to acetic acid, alkali acid, sulphuric acid, corrode...etc.
All length are available Stainless steel type: 304, 316
Bare as cable tie working temperature: -60°C-150°C
Utilized in general use banding applications
Can be used with clip style buckles to create band clamps
Packaged in a standard box or a durable plastic tote for easy dispensing

常用扎帶(紙盒包裝) BAND IN CARDBOARD

型號 TYPE	寬度 WIDTH APPROX	厚度 THICKNESS MM(INCH)	包裝 PACKAGE: M/BAG	配套搭扣 FIT BUCKLE	配套工具 SUIT TOOL
BTA-8	8mm	0.3mm(0.011)	50/卷	L-8	YF01/LQA
BTA-10	10mm	0.3mm(0.011)	50/卷	L-10	YF01/LQA
BTA-12	12mm	0.4mm(0.016)	25/卷	L-12;O-12	YF01/LQA
BTA-12.7	12.7mm	0.38mm(0.015)	25/卷	L-13;Y-13	YF01/LQA
BTA-16	16mm	0.4mm(0.016)	25/卷	L-16;O-16	YF01/LQA
BTA-19	19mm	0.76mm(0.03)	25/卷	L-19;Y-19	YF01/LQA

常規包裝為100英尺，即30.5米一盒；支持按具體重量的整卷包裝。
Available in mill coil lengths. All sizes in standard cardboard packing with 100' (30.5M) per roll.

常用扎帶(塑料盒包裝) BAND IN PLASTIC DISPENSER

型號 TYPE	寬度 WIDTH APPROX	厚度 THICKNESS MM(INCH)	包裝 PACKAGE: M/BAG	配套搭扣 FIT BUCKLE	配套工具 SUIT TOOL
BTA-8	8mm	0.3mm(0.011)	50/卷	L-8	YF01/LQA
BTA-10	10mm	0.3mm(0.011)	50/卷	L-10	YF01/LQA
BTA-12	12mm	0.4mm(0.016)	25/卷	L-12;O-12	YF01/LQA
BTA-12.7	12.7mm	0.38mm(0.015)	25/卷	L-13;Y-13	YF01/LQA
BTA-16	16mm	0.4mm(0.016)	25/卷	L-16;O-16	YF01/LQA
BTA-19	19mm	0.76mm(0.03)	25/卷	L-19;Y-19	YF01/LQA

常規包裝為100英尺，即30.5米一盒
Available in mill coil lengths.



材質：不銹鋼材質，各種長度皆可制作，接受合理的OEM；
特性：耐酸、耐腐蝕、不易燃燒、抗張强度高；
工作溫度範圍：-40°C-85°C；
適用於一般的戶外環境捆扎應用；
配合多種不銹鋼扎扣的使用；

High resistance to acetic acid, alkali acid, sulphuric acid, corrode...etc.
All length are available Stainless steel type: 304, 316
Bare as cable tie working temperature: -40°C-85°C
Utilized in general use banding applications
Can be used with clip style buckles to create band clamps

不銹鋼噴塑盤帶 STAINLESS STEEL STRAP-EPOXY COATED TYPE

型號 TYPE	規格 SPECIFICATION	材質 MATERIAL	塗層材質 PAINTED LAYER MATERIAL	表面 SURFACE	包裝 PACKAGE:
BT-1	0.3×8	1GR18Ni9	PVC	黑 Black	50M/盤500M/箱 50M/roll 500M/carton
BT-1	0.3×10	1GR18Ni9	PVC	黑 Black	50M/盤500M/箱 50M/roll 500M/carton
BT-1	0.4×12	1GR18Ni9	PVC	黑 Black	30M/盤400M/箱 30M/roll 400M/carton
BT-1	0.4×15	1GR18Ni9	PVC	黑 Black	25M/盤400M/箱 25M/roll 400M/carton
BT-1	0.4×19	1GR18Ni9	PVC	黑 Black	25M/盤400M/箱 25M/roll 400M/carton

不銹鋼包塑盤帶 STAINLESS STEEL STRAP-PVC COATED TYPE

型號 TYPE	規格 SPECIFICATION	材質 MATERIAL	塗層材質 PAINTED LAYER MATERIAL	表面 SURFACE	包裝 PACKAGE:
BT-2	1.2×6	1GR18Ni9	不銹孔 Non open fig hole	PVC	30M/盤500M/箱 30M/roll 500M/carton
BT-2	1.2×8	1GR18Ni9	不銹孔 Non open fig hole	PVC	30M/盤500M/箱 30M/roll 500M/carton
BT-2	1.2×12	1GR18Ni9	不銹孔 Non open fig hole	PVC	30M/盤400M/箱 30M/roll 400M/carton
BT-2	1.2×16	1GR18Ni9	不銹孔 Non open fig hole	PVC	25M/盤400M/箱 25M/roll 400M/carton
BT-2	1.2×19	1GR18Ni9	不銹孔 Non open fig hole	PVC	20M/盤400M/箱 20M/roll 400M/carton

不銹鋼粘塑盤帶 STAINLESS STEEL STRAP-PLASTIC COATED TYPE

型號 TYPE	規格 SPECIFICATION	材質 MATERIAL	塗層材質 PAINTED LAYER MATERIAL	表面 SURFACE	包裝 PACKAGE:
BT-3	1.2×12	1GR18Ni9	PVC	黑 Black	20M/盤200M/箱 20M/roll 200M/carton
BT-3	1.2×16	1GR18Ni9	PVC	黑 Black	20M/盤200M/箱 20M/roll 200M/carton



塗層型牙型扎扣 POLYESTER COATED EAR-LOK BUCKLE

表面可以進行不同顏色的塗層處理，提供更強的抗腐蝕性能。
能用于一般和較惡劣使用環境
材質為201/304不銹鋼
支持單圈和雙圈扎帶捆綁
配合扎帶使用，可以自定義任意扎帶長度
Polyester coatings come in a wide range of colors, and offer superior performance, UV resistance and durability
Ear-Lok style buckle for standard or heavy duty applications
Type 201 stainless steel
Can hold a single or double wrapped band configuration
Band clamps using an Ear-Lok buckle can be formed over any contour or shape

型號 TYPE	材質 MATERIAL	寬度 WIDTH APPROX MM	包裝數量 PKG. QTY.
BT12P	201SS	12.70	100/Box
BT34P	201SS	19.05	100/Box



鍍鋅鋼牙型扎扣 GALVANIZED CARBON STEEL EAR-LOK BUCKLE

鍍鋅鋼牙型扎扣，適用於對抗腐蝕型要求不高的一般環境。
鍍鋅鋼具有一般的抗拉強度和抗腐蝕性能
配合不銹鋼扎帶使用
支持單圈和雙圈扎帶捆綁
適用於一般捆扎環境
Galvanized carbon steel band offers medium strength coupled with good corrosion resistance in mild atmosphere and occasional fresh water
Ear-Lok style buckle for medium duty applications
Can hold a single or double wrapped band configuration
Used in general banding applications

型號 TYPE	材質 MATERIAL	寬度 WIDTH APPROX MM	厚度 THICKNESS MM	包裝數量 PKG. QTY.
BT14	GCS	6.40	0.8	100個/盒
BT38	GCS	9.50	1.0	100個/盒
BT12	GCS	12.70	1.2	100個/盒
BT58	GCS	16.00	1.2	100個/盒
BT34	GCS	19.00	1.5	100個/盒



O型不銹鋼搭扣 O TYPE BANDING CLIP

品名 ITEM	規格型號 PART NUMBER	寬度 WIDTH APPROX
O型	O-12	12(0.472)
	O-16	16(0.63)



L型不銹鋼扎扣 L TYPE BANDING CLIP

采用201/304/316系列不銹鋼製造，價格經濟，易于安裝
應用於一般輕量級捆扎任務
支持單圈雙圈扎帶捆綁
廣泛應用於電纜、管道、標牌的捆綁
201/304/316 Stainless Steel, economical and easy to install
Utilized in light duty and general use banding applications
Clip can hold a single or double wrapped band configuration
Used frequently for cable bundling, insulation and hose bundling applications

型號 TYPE	寬度 WIDTH APPROX MM	厚度 THICKNESS MM	包裝數量 PKG. QTY.
201SS 304SS 316SS			
L-6A L-6B L-6C	6.00	0.7	100/Box
L-8A L-8B L-8C	8.00	0.7	100/Box
L-10A L-10B L-10C	10.00	0.7	100/Box
L-12A L-12B L-12C	12.00	0.7	100/Box
L-16A L-16B L-16C	16.00	0.7	100/Box
L-19A L-19B L-19C	19.00	0.8	100/Box

除常規厚度外，客戶可選厚度有：0.4mm, 0.5mm, 1.2mm, 1.5mm
Other thickness can be for you choose: 0.4mm, 0.5mm, 1.2mm or 1.5mm



LX型不銹鋼扎扣 LX TYPE BANDING CLIP

不銹鋼材質提供良好的抗氧化性和抗腐蝕性能
支持單圈和雙圈扎帶捆綁
用戶可以自定義任意扎帶長度
Stainless Steel material offers good resistance to oxidation and corrosion
Can hold a single or double wrapped band configuration
Band clamps can be formed over any contour or shape

型號 TYPE	寬度 WIDTH APPROX INCH MM	厚度 THICKNESS MM	包裝數量 PKG. QTY.
201SS 304SS 316SS			
LH-8A LH-8B LH-8C	3/8 8.00	0.7	100個/盒
LH-12A LH-12B LH-12C	1/2 12.00	0.7	100個/盒
LH-16A LH-16B LH-16C	5/8 16.00	0.7	100個/盒
LH-19A LH-19B LH-19C	3/4 19.00	0.8	100個/盒





LQ A輕型棘輪緊帶機 STAINLESS STEEL CABLE TIE TOOL - COMMON TYPE

- 用于帶寬為6.4mm-20mm,厚度不超過0.50mm的不銹鋼扎帶,便于攜帶且耐用;
- 具有拉緊鋼帶并切斷多餘部分鋼帶的功能;
- 用于安裝輕型不銹鋼扎帶、預制系列扎帶和其他一些打包操作;
- 操作便捷簡單, 提供了安裝效率;
- 用于一般性的打包捆綁操作。
- 重量: 約.5千克。
- For the width 6.4mm-20mm band, thickness can not be more than 0.50mm, durable and convenient
- Tighten strap and cut off the excess part strap;
- For the installation of light stainless steel band, prefabricated series tie and other packaging operation;
- Easy operation, efficient installation
- Used for general packaging operation.
- Weight: about 1.5 kg.



LQ A加強型棘輪緊帶機 STAINLESS STEEL CABLE TIE TOOL - STRENGTHEN TYPE

- 用于帶寬為6.4mm-20mm,厚度不超過0.60mm的不銹鋼扎帶,便于攜帶且耐用;
- 具有拉緊鋼帶并切斷多餘部分鋼帶的功能;
- 用于安裝輕型不銹鋼扎帶、預制系列扎帶和其他一些打包操作;
- 操作便捷簡單, 提供了安裝效率;
- 用于一般性的打包捆綁操作。
- 重量: 約.5千克。
- For the width 6.4mm-20mm band, thickness can not be more than 0.60mm, durable and convenient
- Tighten strap and cut off the excess part strap;
- For the installation of light stainless steel band, prefabricated series tie and other packaging operation;
- Easy operation, efficient installation
- Used for general packaging operation.
- Weight: about 1.5 kg.





材質：採用PP材料制成，附鋼釘。
使用方法：將電線置于卡內，用鐵錘將鋼釘釘上牆壁即可將電線固定。
用途：一般室內配線固定電線用。
Material: PP, Steel nail.
How to use: Put the cable under the clip and hammer the nail into the wall to secure the cable.
Application: Securing of cables for general indoor wiring.

規格 SIZE	高 H MM	圓徑 R MM	鋼釘 Nail MM	包裝 PACKING
4mm	5.3	4	1.7×15	100pcs
5mm	6.5	5	1.7×15	
6mm	8.1	6	1.7×17	
7mm	8.7	7	1.8×19	
8mm	9.6	8	1.9×21	
9mm	10.7	9	2.0×22	
10mm	11.7	10	2.05×25	
12mm	12.8	12	2.05×27	
14mm	14.9	14	2.4×32	
16mm	16.9	16	2.5×35	
18mm	20.8	18	2.5×37	
20mm	23.6	20	2.8×42	
22mm	25.0	22	2.8×48	
25mm	27.7	25	3.2×48	
30mm	33.1	30	3.2×53	
35mm	36.6	35	3.2×58	
40mm	45.2	40	3.4×60	

方型鋼釘絨卡
SQUARE NAIL CABLE CLIP



材質：採用PP材料制成，附鋼釘。
使用方法：將電線置于卡內，用鐵錘將鋼釘釘上牆壁即可將電線固定。
用途：一般室內配線固定電線用。
Material: PP, Steel nail.
How to use: Put the cable under the clip and hammer the nail into the wall to secure the cable.
Application: Securing of cables for indoor wiring.

規格 SIZE	高 H (MM)	內徑		鋼釘 Nail (MM)	包裝 PACKING
		H1 (MM)	R (MM)		
4mm	6.0	3.8	4	1.7×15	100pcs
5mm	6.0	3.8	5	1.7×15	
6mm	6.5	4.1	6	1.7×16	
7mm	7.0	4.7	7	1.9×18	
8mm	7.5	5.0	8	2.05×20	
9mm	8.2	5.4	9	2.05×23	
10mm	8.6	5.7	10	2.3×23	
12mm	9.0	6.1	12	2.3×23	
14mm	11.2	6.5	14	2.4×30	



材質：採用PE材料制成
顏色：白、灰
Material: PE.
Color: White, Grey

編號 ITEM NO.	長 L (mm)	外徑 D (mm)	內徑 D (mm)
EN-06	29.8	6.0	4.9
EN-08	38.6	7.9	5.3
EN-10	42.7	9.9	5.8
EN-12	47.9	11.6	6.3

扎帶固定座 CABLE TIE HOLDER

ITEM NO.	H	H1	W	L	L1	PACKING
BT-6	31	6.0	8.0	12.7	9.7	100PCS
BT-8	37	6.0	10	12.7	9.7	100PCS

粘式扎帶固定座 CABLE TIE MOUNTS



材質：採用UL認可之ABS，阻燃等級94V-2，背附進口海綿膠，絕緣性能良好，耐久性、不易老化。
使用方法：將定位片背面雙面膠撕開，貼于牆面固定，再用扎帶捆扎電線。
用途：省時、簡便，供面板不可以鑽孔時使用。
Material: UL approved Nylon 66, 94V-2, with imported adhesive sticker. Good insulation, long lasting and uneasy to age.
How to use: Remove the cover of the adhesive and stick the piece properly, then put in cable tie for using.
Application: Used where hole-drilling is not allowed, easy and time-saving.


型號 ITEM NO.	長×寬 L×W (MM)	高 H MM	帶孔 T MM	外框尺寸 CM	數量 PCS/CTN	毛重/淨重 KG
BT-20	20×20	6.1	5.0	52×35×36	20000	20/18
BT-25	25×25	7.5	6.2	52×35×36	10000	19/17
BT-30	30×30	8.7	6.4	54×33×32	6000	18/16
BT-40	40×40	6.4	10.8	54×33×32	3000	17/15

扎帶固定座 SADDLE TYPE TIE MOUNTS

材質：UL合格之NYLON66 (本色)，防火等級94V-2。
用途：先將固定座以螺絲固定，再以扎帶捆綁電線，馬鞍形設計使電線易于固定。
Material: UL approved Nylon 66, 94V-2
Application: Saddle design provide maximum stability to wire bundles. To apply, simply fix mount with a screw and secure wire bundles with BEISIT nylon cable ties.

型號 ITEM NO.	高 H	長 L	寬 W	帶孔 T	固定孔 B	包裝 PACKING
BT-HC-1	7	15	10	5	3	每包100PCS
BT-HC-15	5.8	12.8	7	4	3.3	
BT-HC-25	9	23	16	9	5	
BT-HC-2	9	23	16	9	6	
BT-HC-2L	9	23	16	9	6.5	





材質：採用PE料制成。

使用方法：先用保護帶固定起點一端，然後按順時針方向環繞束緊，即可將電線束為一體。

用途：作為保護電線不受磨損及絕緣用，并可改進電線彎曲的美觀。

Material: PE.

Usage: Fix one end with safety belt first, then circle the wires clockwise to make them tightened.

Application: Protect electric wires from wearing, as insulation for electric wires and make them looks nice.

型號 ITEM NO.	內徑 D	外徑 D1	寬度 W	結束可能範圍 WRAPPING RANGE (mm φ)
BT-6SW	4	6	7.0	4×50
BT-8SW	6	8	10.8	6×60
BT-10SW	7.5	10	11.4	7.5×60
BT-12SW	9	12	13.9	9×65
BT-16SW	13	16	15.0	12×70
BT-20SW	16	20	18.2	15×100
BT-25SW	21	25	19.6	20×130

卷式結束帶 SPIRAL WRAPPING BAND

型號 ITEM NO.	規格 SIZE	包裝 PACKING
BT-15A	Φ15mm	
BT-20A	Φ20mm	
BT-25A	Φ25mm	2.5m 10m
BT-30A	Φ30mm	

ECM型 配線標志 ECM-TYPE WIRE MARKERS

材質：採用軟質PVC料精製，形如倒凹形，套管上面印有文字代號，內徑伸縮彈性很大。

使用方法：使用時將每個切縫處輕劃下，即可配線。

特點：各種型號適合各種大小之配線，接受配線長度或特殊標志之訂制。

Material: Soft PVC, concave conversed shape, ode word printed on the sleeve, big elasticity of inner diameter. How to use: Peel each hock lightly

Feature: Suitable for any size of wires, length and special marking is available to order.

型號 ITEM NO.	適用電線 SUITABLE WIRE	內徑 IN-DIAMETER	長度 LENGTH	號碼 No.
GEC-0	18AWG 16AWG 0.75	2.0-3.0	3.5	
GEC-1	0.75 1.25 2.0 3.0	3.0-5.2	4.0	0.9
GEC-2	3.5 5.5 8.0	3.6-7.4	5.0	A-Z
GEC-3	8.0 14.0 22.0	5.2-10.0	5.0	



功用：

◆電線之保護與絕緣。

◆端子與電線接頭之絕緣與保護。

◆分色作用。

◆防水。

◆電阻電容器之保護與絕緣。

標記顏色（透光）：黑、白、紅、藍、黃、綠、棕、灰、橙、紫。

Approved date:

◆UL2240,105°C,660V,VW-1,CSA,125°C,660V,OFT


◆F:105°C (UL, CSA合格)

◆F2:125°C (UL, CSA合格)

◆F32:125°C (UL, DSA合格)

型號 ITEM NO.	收縮前 As Supplied		收縮後 After Shrinkage		包裝 Packing M/Roll
	內徑 I.D.(mm)	厚度 Thickness	內徑 I.D.(mm)	厚度 Thickness	
BT-1	1.0	0.2±0.05	0.5	0.4±0.05	400
BT-1.5	1.5	0.2±0.05	0.75	0.4±0.05	300
BT-2	2.0	0.25±0.05	1.0	0.45±0.1	
BT-2.5	2.5	0.25±0.05	1.25	0.45±0.1	200
BT-3	3.0	0.25±0.05	1.5	0.45±0.1	
BT-3.5	3.5	0.25±0.05	1.75	0.45±0.1	
BT-4	4.0	0.25±0.05	2.0	0.45±0.1	
BT-5	5.0	0.35±0.05	2.5	0.55±0.1	
BT-6	6.0	0.35±0.05	3.0	0.55±0.1	
BT-7	7.0	0.35±0.05	3.5	0.55±0.1	
BT-8	8.0	0.35±0.05	4.0	0.55±0.1	
BT-9	9.0	0.35±0.05	4.5	0.55±0.1	
BT-10	10.0	0.35±0.05	5.0	0.60±0.1	
BT-11	11.0	0.35±0.05	5.5	0.60±0.1	
BT-12	12.0	0.35±0.1	6.0	0.70±0.1	
BT-13	13.0	0.35±0.1	6.5	0.70±0.1	
BT-14	14.0	0.35±0.1	7.0	0.70±0.1	
BT-15	15.0	0.35±0.1	7.5	0.70±0.1	
BT-16	16.0	0.35±0.1	8.0	0.70±0.1	
BT-17	17.0	0.35±0.1	8.5	0.70±0.1	
BT-18	18.0	0.4±0.1	9.0	0.80±0.1	
BT-20	20.0	0.5±0.1	10.0	0.90±0.1	
BT-22	22.0	0.5±0.1	11.0	0.90±0.1	
BT-25	25.0	0.5±0.1	12.5	0.90±0.1	
BT-28	28.0	0.5±0.1	14.0	0.90±0.1	
BT-30	30.0	0.5±0.1	15.0	1.00±0.2	
BT-35	35.0	0.5±0.1	17.5	1.00±0.2	
BT-40	40.0	0.5±0.1	20.0	1.00±0.2	
BT-50	50.0	0.5±0.1	25.0	1.00±0.2	
BT-60	60.0	0.6±0.1	30.0	1.20±0.2	
BT-70	70.0	0.6±0.1	35.0	1.20±0.2	
BT-80	80.0	0.6±0.1	40.0	1.20±0.2	
BT-90	90.0	0.6±0.1	45.0	1.30±0.2	
BT-100	100.0	0.7±0.1	50.0	1.30±0.2	
BT-150	150.0	0.8±0.1	75.0	1.60±0.2	





材質：南亞硬質PVC (白色)，絕緣性良好、不自燃、耐溫至85℃。
用途：舞臺、電氣、冷氣工程及室內明線配線等適用。

特點：密封式絕緣配線槽專為防塵、防鼠而設計。

Material: Made from PVC (white), well insulation, Fire-retardant and heat-resistant is up to 85°C.
Application: Suitable for open wire's distributing of stage, electric, cold air engineering and indoors.
Character: Sealed insulating distributing slot is designed specially for dust proof and mouse proof.

型號 ITEM NO.	高×寬 H×W(mm)	電線容量 Contained wire (2.0')	長度 Length
PEC-1015	10×15	2-5 PCS	2m
PEC-1020	10×20	3-6 PCS	2m
PEC-1025	10×25	5-10 PCS	2m
PEC-1035	10×35	10-15 PCS	2m
PEC-1525	15×25	5-10 PCS	2m
PEC-1530	15×30	5-15 PCS	2m
PEC-2030	20×30	10-20 PCS	2m
PEC-2035	20×35	15-25 PCS	2m
PEC-2050	20×50	20-25 PCS	2m
PEC-2540	25×40	20-40 PCS	2m
PEC-3045	30×45	25-45 PCS	2m
PEC-3050	30×50	30-50 PCS	2m
PEC-3060	30×60	55-65 PCS	2m
PEC-3080	30×80	75-85 PCS	2m
PEC-30100	30×100	130-150 PCS	2m
PEC-5015	50×15	10-25 PCS	2m
PEC-5025	50×25	25-45 PCS	2m
PEC-5035	50×35	50-60 PCS	2m
PEC-5045	50×45	70-80 PCS	2m
PEC-5050	50×50	80-90 PCS	2m
PEC-5055	50×55	100-110 PCS	2m
PEC-5080	50×80	180-200 PCS	2m
PEC-8045	80×45	160-180 PCS	2m
PEC-8050	80×50	180-200 PCS	2m
PEC-8055	80×55	180-210 PCS	2m
PEC-8080	80×80	240-290 PCS	2m
PEC-80100	80×100	260-350 PCS	2m
PEC-50100	50×100	200-260 PCS	2m
PEC-50120	50×120	240-290 PCS	2m
PEC-80120	80×120	300-400 PCS	2m
PEC-100160	100×160	450-600 PCS	2m
PEC-160200	160×200	1040-1200 PCS	2m



材質：南亞硬質PVC (灰色)，絕緣性良好、不自燃、耐溫至85℃。

構造：由槽底及槽蓋兩部分組成，底槽兩側設有螺孔。

Material: Made from PVC (gray), well insulation and heat-resistant up to 85°C.

Structure: Made up of duct bottom and lid, with two out-holes designed at the bottom.

型號 ITEM NO.	高×寬 H×W(mm)	電線容量 Contained wire (2.0')	長度 Length
PXC3-2015	20×15	5-10 PCS	2m
PXC3-2025	20×25	5-15 PCS	2m
PXC3-2525	25×25	10-20 PCS	2m
PXC3-3015	30×15	5-15 PCS	2m
PXC3-3020	30×20	10-20 PCS	2m
PXC3-3025	30×25	15-25 PCS	2m
PXC3-3030	30×30	20-40 PCS	2m
PXC3-3035	30×35	30-45 PCS	2m
PXC3-3045	30×45	40-55 PCS	2m
PXC3-3530	35×30	30-45 PCS	2m
PXC3-3535	35×35	35-50 PCS	2m
PXC3-3540	35×40	50-60 PCS	2m
PXC3-4025	40×25	20-25 PCS	2m
PXC3-4030	40×30	35-45 PCS	2m
PXC3-4040	40×40	60-70 PCS	2m
PXC3-5015	50×15	10-25 PCS	2m
PXC3-5025	50×25	25-45 PCS	2m
PXC3-5030	50×30	30-50 PCS	2m
PXC3-5035	50×35	50-60 PCS	2m
PXC3-5040	50×40	60-70 PCS	2m
PXC3-5045	50×45	70-80 PCS	2m
PXC3-5050	50×50	80-90 PCS	2m
PXC3-5055	50×55	100-110 PCS	2m
PXC3-5080	50×80	180-200 PCS	2m
PXC3-50100	50×100	210-260 PCS	2m
PXC3-8045	80×45	160-180 PCS	2m
PXC3-8050	80×50	180-200 PCS	2m
PXC3-8055	80×55	180-210 PCS	2m
PXC3-8080	80×80	240-290 PCS	2m
PXC3-80100	80×100	260-350 PCS	2m
PXC3-100100	100×100	300-400 PCS	2m

