




If you need the following catalogues, please feel free to contact us.



Euro Terminal Blocks



Din Rail Terminal Blocks




Euro Terminal Blocks



American Terminal Blocks



THR & SMD Terminal Blocks



Transformer Terminal Blocks



OEM/ODM

DEGSON
宁波高正电子有限公司
宁波高松电子有限公司
DEGSON ELECTRONICS CO.,LTD.
地址: 中国宁波慈溪逍林大道1585号
Add: No.1585, Xiaolin Road, Cixi.
Ningbo China
P.C.: 315321
Tel: +86-574-63504333
Fax: +86-574-63512345
E-mail: sale@degson.com
www.degson.com




DEGSON Official Distributor:

样本仅供参考，具体数据以本公司提供的规格书为准！
The catalog is only for reference, and the detail data must be based on our company's specification!



LIGHTING TERMINAL BLOCK

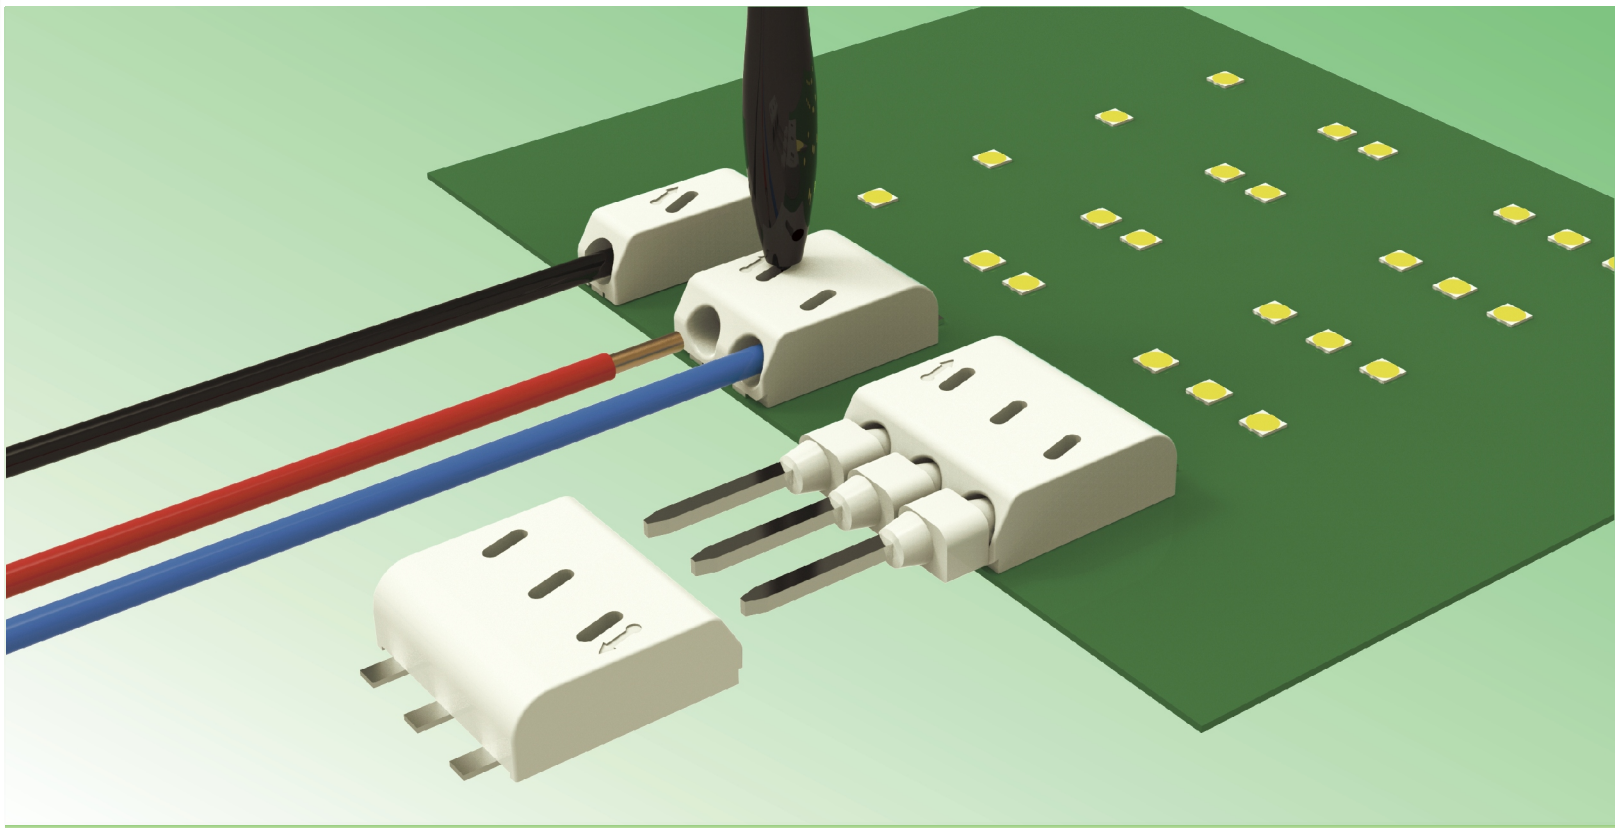

ISO9001 ISO14001     CB RoHS REACH
DEGSON ELECTRONICS CO.,LTD.

LC-15-01
Edition:T85

公司简介

DEGSON高正(高松)电子有限公司创建于1990年，是一家高新技术企业，是亚洲最大接线端子和精密模具专业制造商之一，是亚洲首家拥有美国UL和德国VDE认可专业实验室的企业。产品通过了  等认证。公司通过了ISO9001、ISO14001管理体系认证。

DEGSON年产接线端子近10亿位，现拥有1000多个品种，12000多种规格的接线端子，产品畅销中国、德国、英国、意大利、西班牙、波兰、俄罗斯、印度、土耳其、巴西、美国、日本、韩国、南非...等70多个国家和地区，为全球工业自动化、仪器仪表、电梯、电力电气、轨道交通、新能源、照明、通讯、电源、安防、船舶等行业，提供优良的产品和服务。

DEGSON在全球建立了完善的销售网络，在德国和上海建立了营销中心，25年来DEGSON以务实诚信、责任创新、和谐发展、规则共赢的企业精神，更好地为客户提供更快捷、全面、专业的本地化服务。


Brief Introduction

Founded in 1990, DEGSON Electronics Co., Ltd. is one of the largest manufactures of terminal blocks and precise moulds in Asia. As a High-tech enterprises, DEGSON owned the first UL and VDE authorized laboratory in Asia. The products have been approved by . The company has been granted ISO9001 and ISO14001 management system certificates.

DEGSON annual production capacity is almost 1 billion poles, including more than 1000 varieties and 12000 specifications terminal blocks. The products are very popular in China, Germany, UK, Italy, Spain, Poland, Russia, India, Turkey, Brazil, USA, Japan, Korea, South Africa and etc. Total is more than 70 countries and areas. DEGSON provide excellent products and service for the customers all over the world, especially in Industrial Automation, Instrument, Elevator, Electric Power, Rail Transport, New Energy, Lighting, Telecommunication, Power Supply, Security, Shipping and etc.


DEGSON fulfill the sales network all over the world and set the Marketing center in Germany and Shanghai, China. In accordance with the enterprise spirit of pragmatic, sincerity, responsibility, innovation, harmonious, development, rule and win-win for 25 years, DEGSON will keep providing more speedy, comprehensive and professional local service.



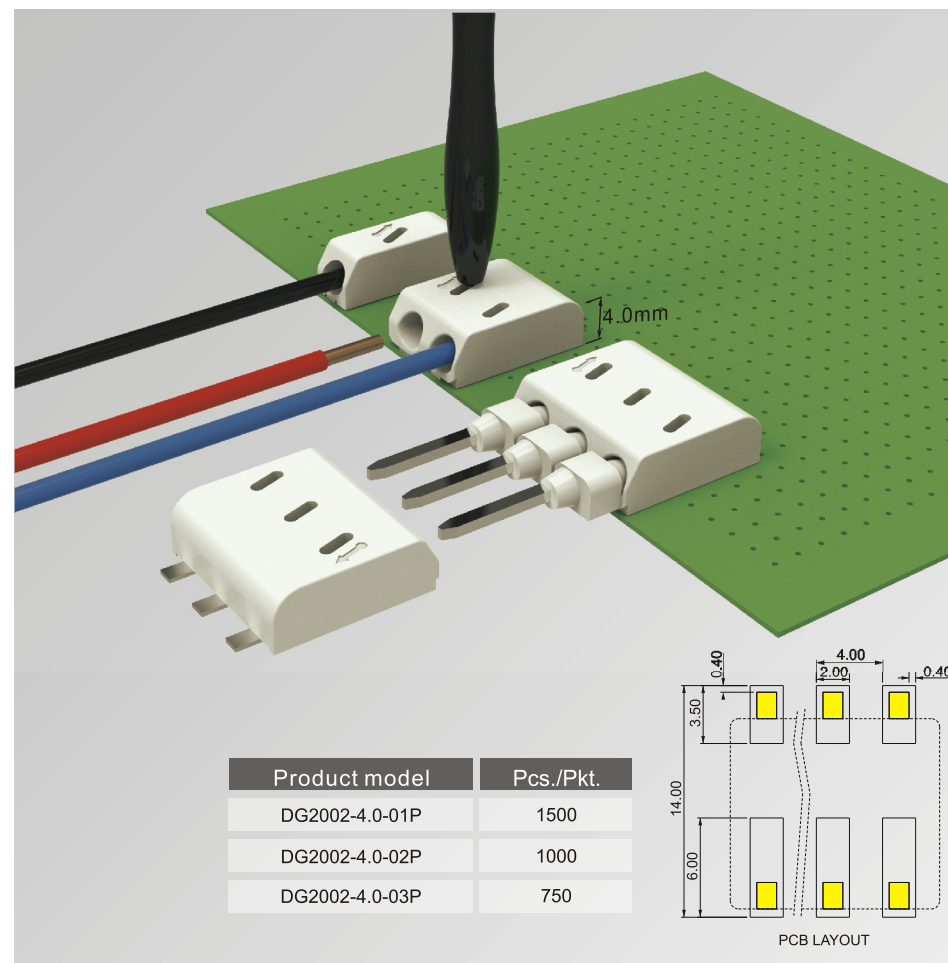


DG2002

- 插入式弹簧结构设计，接线更快速。
- 耐高温材料，可采用SMT回流焊接。
- 紧凑型结构设计，高度仅4.0mm。
- 0.2mm²-0.75mm²线径可供选择。
- Compact structure ,faster connection.
- Heat-resistance material ,suitable for SMT soldering.
- The height is as low as 4.0mm.
- Wire range 0.2mm²-0.75mm².

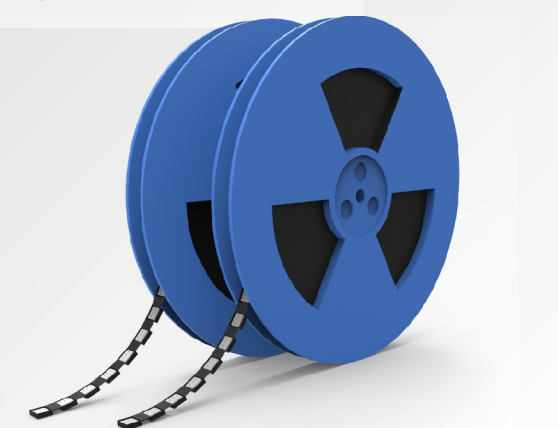

Product model	Pcs./Pkt.
DG2002-4.0-01P	1500
DG2002-4.0-02P	1000
DG2002-4.0-03P	750




PCB LAYOUT




 Pitch: 4.0mm; Poles: 1P

Approval		
Standard	UL	IEC
Voltage	600V	320V
Current	9A	9A
Wire size	24-18AWG	0.2-0.75mm ²
Pitch	4.0mm(157°)	
Poles	1P	




 Pitch: 4.0mm; Poles: 2P

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	9A	9A
Wire size	24-18AWG	0.2-0.75mm ²
Pitch	4.0mm(157°)	
Poles	2P	



 Pitch: 4.0mm; Poles: 3P


Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	9A	9A
Wire size	24-18AWG	0.2-0.75mm ²
Pitch	4.0mm(157°)	
Poles	3P	

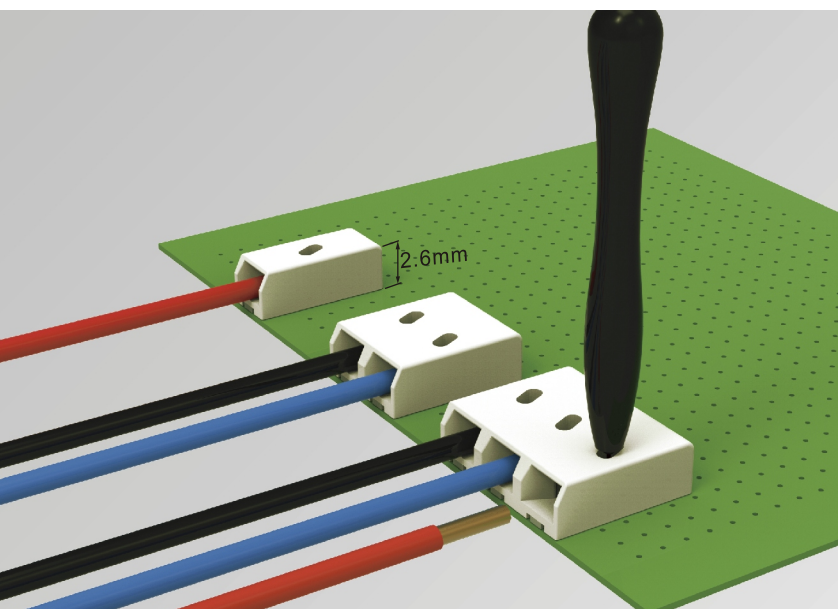


DG2001


- 插入式弹簧结构设计，接线更快速。
- 耐高温材料，可采用SMT回流焊接。
- 紧凑型结构设计，高度仅2.6mm。
- 0.14mm²-0.34mm²线径可供选择。
- Compact structure ,faster connection.
- Heat-resistance material,suitable for SMT soldering.
- The height is as low as 2.6mm.
- Wire range 0.14mm²-0.34mm².

Product model	Pcs./Pkt.
DG2001-3.0-01P	1500
DG2001-3.0-02P	1000
DG2001-3.0-03P	750



PCB LAYOUT

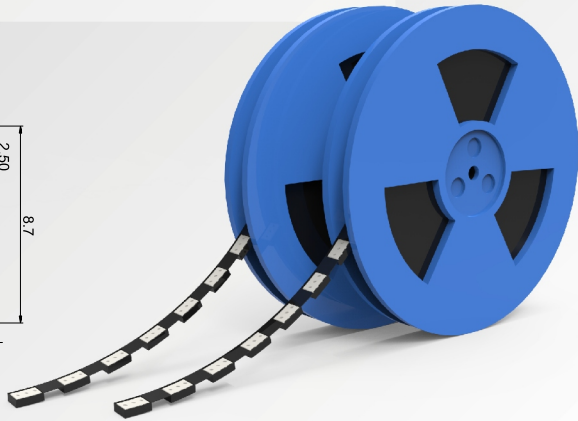


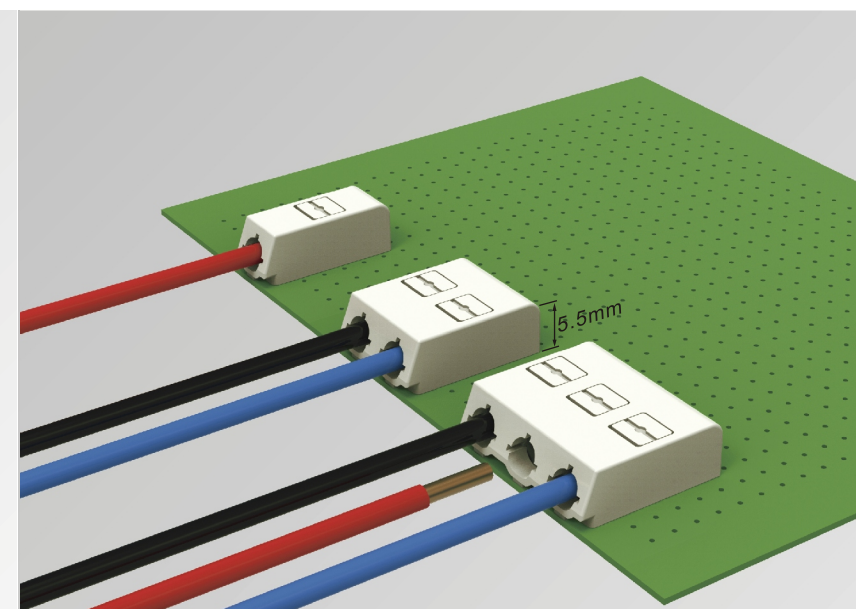


DG2003


- 插入式弹簧结构设计，接线更快速。
- 耐高温材料，可采用SMT回流焊接。
- 紧凑型结构设计，高度仅5.5mm。
- 0.2mm²-1.5mm²线径可供选择。
- Compact structure ,faster connection.
- Heat-resistance material,suitable for SMT soldering.
- The height is as low as 5.5mm.
- Wire range 0.2mm²-1.5mm².

Product model	Pcs./Pkt.
DG2003-6.0-01P	1500
DG2003-6.0-02P	1000
DG2003-6.0-03P	750




PCB LAYOUT

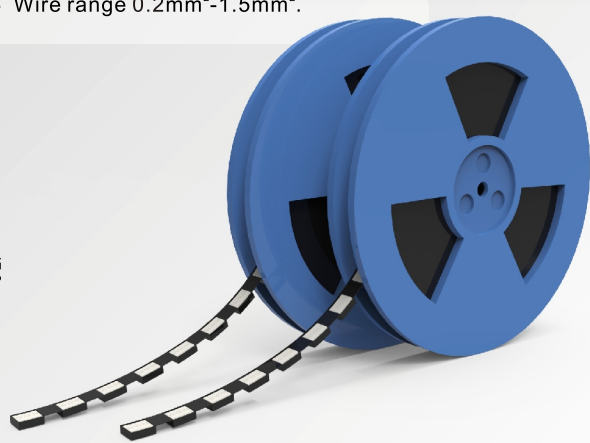





CE	RoHS	REACH
Pitch: 3.0mm; Poles: 1P		
Approval		
Standard	UL	IEC
Voltage	600V	160V
Current	3A	3A
Wire size	26-22AWG	0.14-0.34mm ²
Pitch	3.0mm(.118")	
Poles	1P	




CE	RoHS	REACH
Pitch: 3.0mm; Poles: 2P		
Approval		
Standard	UL	IEC
Voltage	250V	160V
Current	3A	3A
Wire size	26-22AWG	0.14-0.34mm ²
Pitch	3.0mm(.118")	
Poles	2P	




CE	RoHS	REACH
Pitch: 3.0mm; Poles: 3P		
Approval		
Standard	UL	IEC
Voltage	250V	160V
Current	3A	3A
Wire size	26-22AWG	0.14-0.34mm ²
Pitch	3.0mm(.118")	
Poles	3P	



CE	RoHS	REACH
Pitch: 6.0mm; Poles: 1P		
Approval		
Standard	UL	IEC
Voltage	600V	250V
Current	10A	17.5A
Wire size	24-16AWG	0.2-1.5mm ²
Pitch	6.0mm(.236")	
Poles	1P	




CE	RoHS	REACH
Pitch: 6.0mm; Poles: 2P		
Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	17.5A
Wire size	24-16AWG	0.2-1.5mm ²
Pitch	6.0mm(.236")	
Poles	2P	




CE	RoHS	REACH
Pitch: 6.0mm; Poles: 3P		
Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	17.5A
Wire size	24-16AWG	0.2-1.5mm ²
Pitch	6.0mm(.236")	
Poles	3P	


DG202

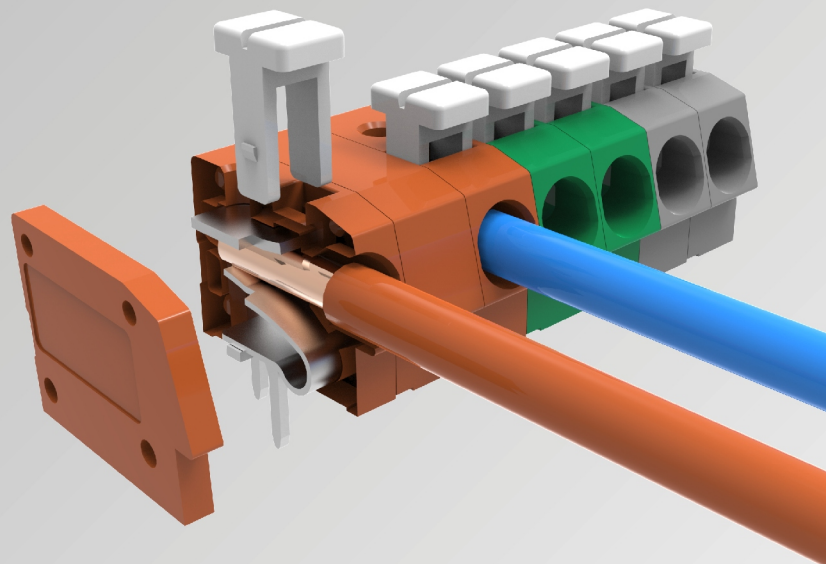

- 插入式弹簧结构设计，夹线更稳定、安全性更高。
- 0.2mm²-2.5mm²线径可供选择。
- 产品设计符合IEC60998、UL1059、UL486E、CSA C 22.2 No.158等国际标准。
- 中国发明专利产品
专利号：ZL 2009 1 0098904.1
- PCB spring terminal block, reliable and firm connection.
- Wire range 0.2mm²-2.5mm².
- Product design conforms to international standards such as IEC60998、UL1059、UL486E、CSA C 22.2 No.158.
- Chinese invention patent
Patent No.:ZL 2009 1 0098904.1




DG202-5.0...29AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0...51AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0...28AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0...61AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0...30AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0...37AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0...26AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-5.0...20AH




UL RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG202-7.5




UL RoHS REACH
Pitch: 7.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	7.5mm(.295")	
Poles	1P~XXP	




DG202-7.5...02AH




UL RoHS REACH
Pitch: 7.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	7.5mm(.295")	
Poles	1P~XXP	




DG202-10.0



UL RoHS REACH
Pitch: 10.0mm; Poles: 1P~XXP


Approval		
Standard	UL	IEC
Voltage	300V	750V
Current	12A	16A
Wire size	20-12AWG	0.2-2.5mm ²
Pitch	10.0mm(.394")	
Poles	1P~XXP	

DG250W

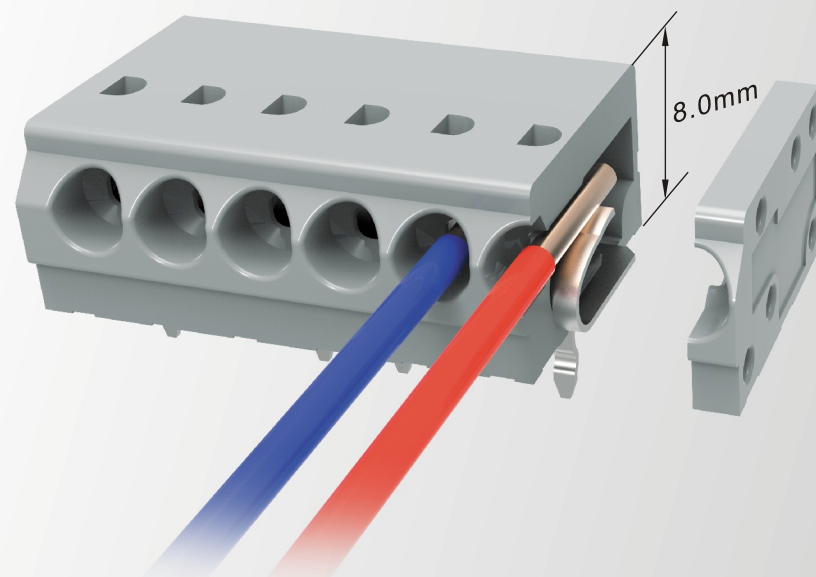

- 紧凑型结构设计, 占用空间小, 布线更方便快捷。
- 0.2mm²-0.75mm²线径可供选择。
- 产品设计符合IEC60998、UL1059、UL486E、CSA C 22.2 No.158等国际标准。
- 专利产品
专利号: ZL 2008 2 0120447.2
- Compact structure ,save space, easy connection.
- Wire range 0.2mm²-0.75mm².
- Product design conforms to international standards such as IEC60998, UL1059, UL486E, CSA C 22.2 No.158.
- Patented product
Patent No.:ZL 2008 2 0120447.2


DG250

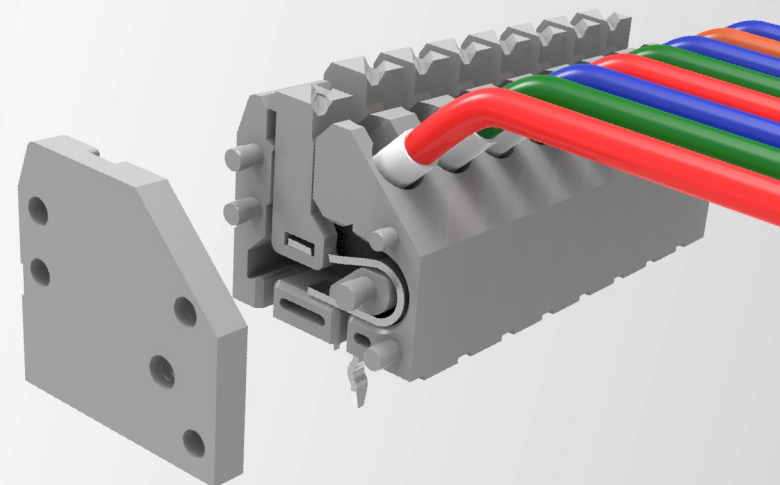

- 弹簧式PCB接线端子, 采用蝶形弹簧连接技术, 夹线稳定、安全可靠。
- 0.2mm²-0.75mm²线径可供选择。
- 产品设计符合IEC60998、UL1059、UL486E、CSA C 22.2 No.158等国际标准。
- PCB spring terminal block ,firm and reliable connection.
- Wire range 0.2mm²-0.75mm².
- Product design conforms to international standards such as IEC60998, UL1059, UL486E, CSA C 22.2 No.158.



DG250W-3.5




UL CE RoHS REACH
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	4A	3A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5(.138")	
Poles	1P~XXP	




DG250W-3.5...06AH




UL CE RoHS REACH
Pitch: 3.5mm; Poles: 2P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	4A	3A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5(.138")	
Poles	2P	




DG250W-3.5...05AH




UL CE RoHS REACH
Pitch: 3.5mm; Poles: 2P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	4A	3A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5(.138")	
Poles	2P	



DG250-2.5




UL CE RoHS REACH
Pitch: 2.5,2.54mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	2A	2A
Wire size	24-20AWG	0.2-0.5mm ²
Pitch	2.5mm(.098")	
Poles	1P~XXP	




DG250-3.5




UL CE RoHS REACH
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	




DG250-3.5...267AH




UL CE RoHS REACH
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	





DG250-3.5...549AH





UL CE RoHS REACH
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	




DEGSON     **RoHS REACH**
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	




DEGSON     **RoHS REACH**
Pitch: 3.81mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	0.5-1.5mm ²
Pitch	3.81mm(.150")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 3.81mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	0.5-1.5mm ²
Pitch	3.81mm(.150")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5mm ²
Pitch	5.0mm(.197") 5.08(.200")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5mm ²
Pitch	5.0mm(.197") 5.08(.200")	
Poles	1P~XXP	




DEGSON     **RoHS REACH**
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 3.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	3.5mm(.138")	
Poles	1P~XXP	




DEGSON     **RoHS REACH**
Pitch: 7.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	7.0mm(.275")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 7.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	5A
Wire size	22-18AWG	0.2-0.75mm ²
Pitch	7.0mm(.275")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 3.81mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	1.5mm ²
Pitch	3.81mm(.150")	
Poles	1P~XXP	





DEGSON     **RoHS REACH**
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DEGSON     **RoHS REACH**
Pitch: 7.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	5A	15A
Wire size	20-18AWG	0.2-2.5mm ²
Pitch	7.5mm(.295")	
Poles	1P~XXP	




DEGSON     **RoHS REACH**
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	5A	10A
Wire size	20-18AWG	2X0.75mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG236-3.81




UL CE RoHS REACH
Pitch: 3.81mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	200V
Current	8A	10A
Wire size	22-16AWG	0.2-1.5mm ²
Pitch	3.81mm(.150")	
Poles	1P~XXP	



DG236-3.81...04AH




UL CE RoHS REACH
Pitch: 3.81mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	200V
Current	8A	10A
Wire size	22-16AWG	0.2-1.5mm ²
Pitch	3.81mm(.150")	
Poles	1P~XXP	




DG236-3.81...05AH




UL CE RoHS REACH
Pitch: 3.81mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	200V
Current	8A	10A
Wire size	22-16AWG	0.2-1.5mm ²
Pitch	3.81mm(.150")	
Poles	1P~XXP	



DG236-5.0




UL CE RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	8A	24A
Wire size	22-16AWG	0.2-1.5mm ²
Pitch	5.0mm(.197")	
Poles	1P~XXP	




DG238-10.0




UL CE RoHS REACH
Pitch: 10.0mm; Poles: 2P~5P

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	20A	24A
Wire size	22-12AWG	0.75-2.5mm ²
Pitch	10.0mm(.394")	
Poles	2P~5P	




DG142V-5.08




UL CE RoHS REACH
Pitch: 5.08mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-16AWG	1.5mm ²
Pitch	5.08mm(.200")	
Poles	1P~XXP	




DG142V-5.08...35AH




UL CE RoHS REACH
Pitch: 5.08mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-16AWG	1.5mm ²
Pitch	5.08mm(.200")	
Poles	1P~XXP	




DG142R-5.08




UL CE RoHS REACH
Pitch: 5.08mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-16AWG	1.5mm ²
Pitch	5.08mm(.200")	
Poles	1P~XXP	




DG236-7.5

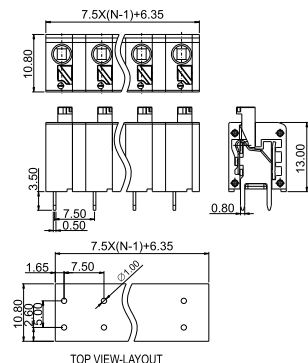


UL CE RoHS REACH
Pitch: 7.5mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	400V
Current	8A	10A
Wire size	20-16AWG	0.2-1.5mm ²
Pitch	7.5mm(.295")	
Poles	1P~XXP	




DG208-5.0

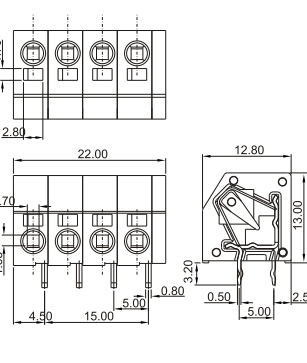


UL CE RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	9A
Wire size	2X(20-16)AWG	0.2-0.75mm ²
Pitch	5.0mm(.197")	
Poles	1~XXP	



DG208-5.0...06AH

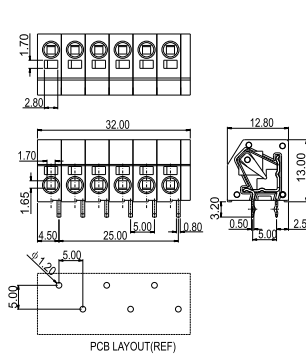


UL CE RoHS REACH
Pitch: 5.0mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	7A	9A
Wire size	2X(20-16)AWG	0.2-0.75mm ²
Pitch	5.0mm(.197")	
Poles	1~XXP	




DG228-3.5

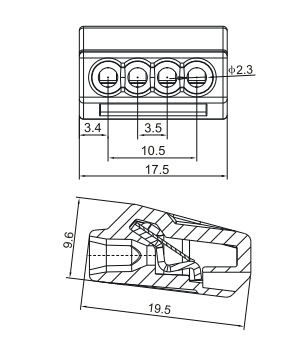


UL CE RoHS REACH
Pitch: 3.5mm; Poles: 2P3P4P5P8P

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	20A	24A
Wire size	22-12AWG	0.5-2.5mm ²
Pitch	3.5mm(.138")	
Poles	2P,3P,4P,5P,8P	




DG142R-5.08...15AH

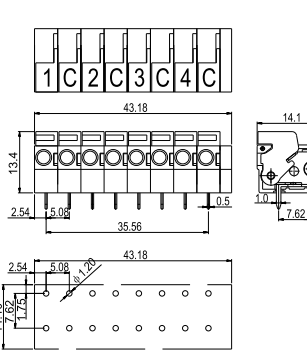


UL CE RoHS REACH
Pitch: 5.08mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-16AWG	1.5mm ²
Pitch	5.08mm(.200")	
Poles	1P~XXP	




DG142R-5.08...16AH

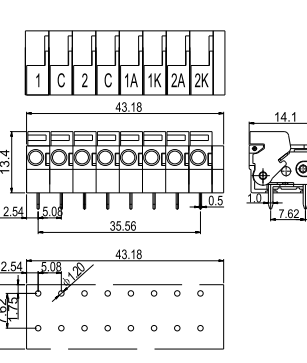


UL CE RoHS REACH
Pitch: 5.08mm; Poles: 1P~XXP

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-16AWG	1.5mm ²
Pitch	5.08mm(.200")	
Poles	1P~XXP	




DG237-5.08

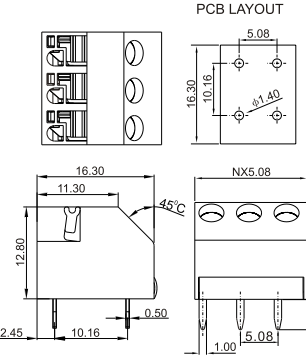


UL CE RoHS REACH
Pitch: 5.08mm; Poles: 2P~7P

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	10A
Wire size	22-16AWG	0.2-1.5mm ²
Pitch	5.08mm(.200")	
Poles	2P~7P	




DG390-5.0

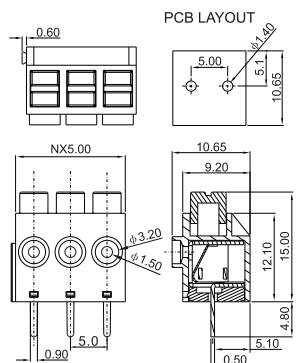




UL CE RoHS REACH
Pitch: 5.0mm; Poles: 2P3P~24P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	10A
Wire size	22-18AWG	1.0mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	






- 贯通式接线端子，将二导体方便、可靠连接。
- 采用磷青铜弹片可保护导线防止损伤。
- 产品设计符合IEC60998、UL1059、UL486E、CSA C 22.2 No.158等国际标准。

- Feed through terminal blocks, easily and reliably connecting two conductors.
- Phosphor bronze wire protector avoiding wire damage.
- Product design conforms to international standards such as IEC60998, UL1059, UL486E, CSA C 22.2 No.158.






UL CE RoHS REACH
Pitch: 8.2,10.0,11.5,15.0mm; Poles: 2P~12P

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V
Current	20A,30A,30A,50A	32A,41A,57A,76A
Wire size	20-12,18-10,14-10,12-8AWG	0.5-4.0mm ² ,1.0-6.0mm ² ,2.5-10mm ² ,6.0-16mm ²
Pitch	8.2mm(.323"),10.0mm(.394"),11.5mm(.453"),15.0mm(.591")	
Poles	2P~12P	




UL CE RoHS REACH
Pitch: 8.2,10.0,11.5,15.0mm; Poles: 2P~12P

Approval		
Standard	UL	IEC
Voltage	300V	450V,750V
Current	15A,20A,30A,50A	24A,32A,41A,57A
Wire size	20-14,18-12,14-10,12-8AWG	0.5-2.5mm ² ,0.5-4mm ² ,2.5-6mm ² ,6.0-10mm ²
Pitch	8.2mm(.323"),10.0mm(.394"),11.5mm(.453"),15.0mm(.591")	
Poles	2P~12P	




CB RoHS REACH
Pitch: 8.2,10.0,11.5,15.0mm; Poles: 12P

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	20A,30A,30A,50A	32A,41A,57A,76A
Wire size	20-12/18-10,12-8/14-6AWG	0.5-4mm ² ,0.75-6mm ² ,1.5-10.0mm ² ,2.5-16.0mm ²
Pitch	8.2mm(.323"),10.0mm(.394"),11.5mm(.453"),15.0mm(.591")	
Poles	12P	





- 采用螺钉或弹簧连接技术，连接可靠、安全性高。
- 针距3.5、3.81、5.0、5.08可供选择。
- 产品设计符合IEC60998、IEC61984、UL1059、UL486E、CSA C 22.2 No.158等国际标准。

- PCB screw or spring connection, reliable and firm connection.
- Pitch 3.5、3.81、5.0、5.08 is available.
- Product design conforms to international standards such as IEC60998, IEC61984, UL1059, UL486E, CSA C 22.2 No.158.




UL CE RoHS REACH
Pitch: 3.5,3.81mm; Poles: 2P~24P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm ²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	




UL CE RoHS REACH
Pitch: 3.5,3.81mm; Poles: 2P~20P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm ²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~20P	





UL CE RoHS REACH
Pitch: 3.5,3.81mm; Poles: 2P~24P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm ²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	




UL CE RoHS REACH
Pitch: 10.0mm; Poles: 2P~12P

Approval		
Standard	UL	IEC
Voltage	300V	450V
Current	10A	24A
Wire size	22-16AWG	0.5-1.5mm ² (spring), 1.0-2.5mm ² (screw)
Pitch	10.0mm(.394")	
Poles	2P~12P	





UL CE RoHS REACH
Pitch: -; Poles: 10P

Approval		
Standard	UL	IEC
Voltage	300V,600V	450V,750V,800V
Current	17.5A,24A,32A,41A,57A,76A,101A,125A	
Wire size	2x1.5mm ² , 2x2.5mm ² , 2x4.0mm ² , 2x6.0mm ² , 2x25mm ² , 2x35mm ²	
Pitch	-	
Poles	10P	




UL CE RoHS REACH
Pitch: -; Poles: 1P~5P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	6.3A	6.3A
Wire size	22-14AWG	0.5-2.5mm ²
Pitch	-	
Poles	1P~5P	




UL CE RoHS REACH
Pitch: 10.0mm; Poles: 2P,3P,4P

Approval		
Standard	UL	IEC
Voltage	600V	450V
Current	20A	24A
Wire size	22-12AWG	0.5-2.5mm ²
Pitch	10.0mm(.394")	
Poles	2P,3P,4P	





UL CE RoHS REACH
Pitch: 3.5,3.81mm; Poles: 2P~20P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm ²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~20P	




UL CE RoHS REACH
Pitch: 3.5,3.81mm; Poles: 2P~24P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm ²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	




UL CE RoHS REACH
Pitch: 3.5,3.81mm; Poles: 2P~20P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	28-16AWG	0.5-1.5mm ²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~20P	





UL CE RoHS REACH
Pitch: 3.5,3.81mm; Poles: 2P~24P

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	12A
Wire size	28-16AWG	0.2-1.5mm ²
Pitch	3.5mm(.138") 3.81mm(.150")	
Poles	2P~24P	

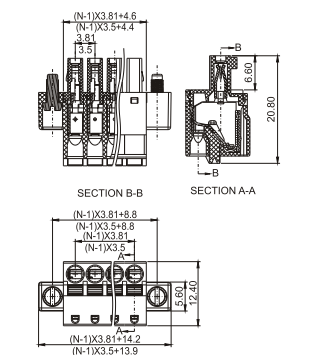



15EDGKDM-3.5
15EDGKDM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	12A
Wire size	28-16AWG	0.2-1.5mm ²
Pitch	3.5mm(.138")	3.81mm(.150")
Poles	2P~20P	

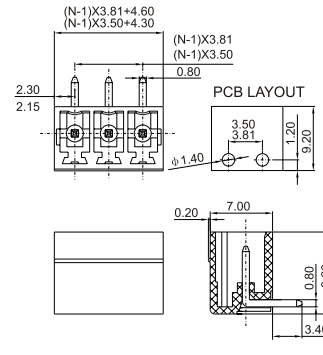



15EDGRC-3.5
15EDGRC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	—	—
Pitch	3.5mm(.138")	3.81mm(.150")
Poles	2P~24P	

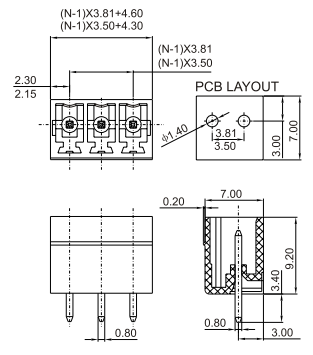

15EDGVC-3.5
15EDGVC-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	—	—
Pitch	3.5mm(.138")	3.81mm(.150")
Poles	2P~24P	

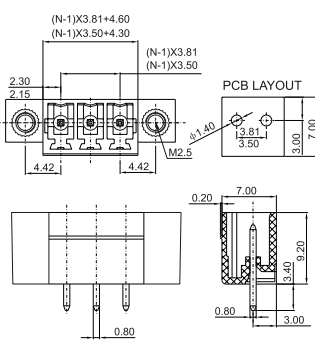


15EDGVM-3.5
15EDGVM-3.81

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	8A	7A
Wire size	—	—
Pitch	3.5mm(.138")	3.81mm(.150")
Poles	2P~20P	





- 采用螺钉式弹簧连接技术，连接牢固可靠。
- 电流高达24A。
- 针距3.5、3.81、3.96、5.0、5.08可供选择。
- 产品设计符合IEC60998、UL1059、UL486E、CSA C 22.2 No.158等国际标准。

- PCB screw connection, reliable and firm connection.
- The current is as high as 24A.
- Pitch 3.5、3.81、3.96、5.0、5.08 is available.
- Product design conforms to international standards such as IEC60998、UL1059、UL486E、CSA C 22.2 No.158.

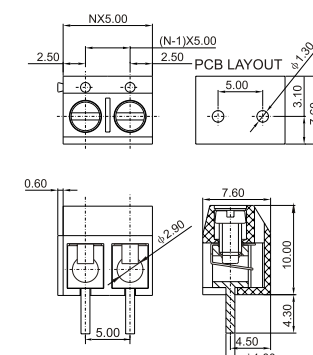



DG301-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	17.5A
Wire size	22-14AWG	1.5mm ²
Pitch	5.0mm(.197")	—
Poles	2P,3P~24P	

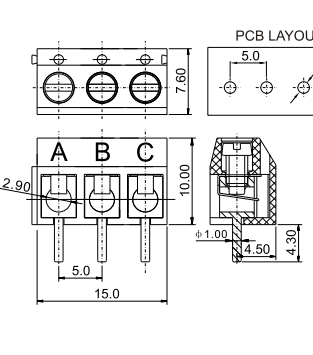


DG301-5.0...08AH

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	17.5A
Wire size	22-14AWG	1.5mm ²
Pitch	5.0mm(.197")	—
Poles	3P	

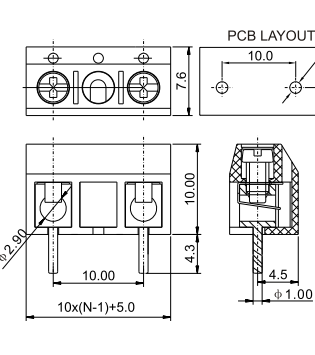


DG301-10.0...93AH

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	17.5A
Wire size	22-14AWG	1.5mm ²
Pitch	10.0mm(.394")	—
Poles	2P,3P~24P	




2EDGK-5.0
2EDGK-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	28-12AWG	2.5mm ²
Pitch	5.0mm(.197")	5.08mm(.200")
Poles	2P~22P	





2EDGKA-5.0
2EDGKA-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	10A
Wire size	28-12AWG	2.5mm ²
Pitch	5.0mm(.197")	5.08mm(.200")
Poles	2P~24P	





2EDGKD-5.0
2EDGKD-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	10A	20A
Wire size	26-12AWG	2.5mm ²
Pitch	5.0mm(.197")	5.08mm(.200")
Poles	2P~16P	





2EDGRC-5.0
2EDGRC-5.08

Approval		
Standard	UL	IEC
Voltage	300V	320V
Current	15A	20A
Wire size	—	—
Pitch	5.0mm(.197")	5.08mm(.200")
Poles	2P~24P	





DG301-5.0...11AH

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	15A	17.5A
Wire size	22-14AWG	1.5mm ²
Pitch	5.0mm(.197")	—
Poles	2P,3P~24P	




DG306-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	15A
Wire size	22-14AWG	1.5mm ²
Pitch	5.0mm(.197")	—
Poles	2P,3P~24P	



DG300-5.0

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	22-14AWG	2.5mm ²
Pitch	5.0mm(.197")	—
Poles	2P,3P~24P	




DG300-5.0...26AH

Approval		
Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	22-14AWG	2.5mm ²
Pitch	5.0mm(.197")	—
Poles	2P,3P~24P	




DG300-5.0...601AH




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 10A 24A
Wire size 22-14AWG 2.5mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	10A	24A
Wire size	22-14AWG	2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	




DG126-5.0...19AH




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 10A 18A
Wire size 26-14AWG 0.5-2.5mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	26-14AWG	0.5-2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	




DG126-5.0...20AH




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 10A 18A
Wire size 26-14AWG 0.5-2.5mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	26-14AWG	0.5-2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	




DG126-5.0...60AH




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 10A 18A
Wire size 26-14AWG 0.5-2.5mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	10A	18A
Wire size	26-14AWG	0.5-2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	



DG632-5.0




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 24A
Wire size 28-12AWG 0.5-2.5mm²
Pitch 5.0mm(.197")
Poles 2P~20P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	28-12AWG	0.5-2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P~20P	



DG632R-5.0




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 24A
Wire size 28-12AWG 0.5-2.5mm²
Pitch 5.0mm(.197")
Poles 2P~20P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	28-12AWG	0.5-2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P~20P	



DG632R-5.0...08AH




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 24A
Wire size 28-12AWG 0.5-2.5mm²
Pitch 5.0mm(.197")
Poles 2P~20P


Standard	UL	IEC
Voltage	300V	250V
Current	15A	24A
Wire size	28-12AWG	0.5-2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P~20P	

- 螺钉方块式连接，连接方便可靠。
- 可连接截面为0.08mm²-35mm²的所有导线。
- 间距2.54mm-15.0mm可供选择。
- 产品设计符合IEC60998、UL1059、CSA C22.2 No.158等国际标准。

- PCB screw connection, reliable and firm connection.
- Wire range 0.08mm²-35mm².
- Pitch 2.54mm-15.0mm is available
- Product design conforms to international standards such as IEC60998、UL1059、CSA C22.2 No.158.




DG166-5.0




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 22A
Wire size 22-12AWG 1.0-2.0mm²
Pitch 5.0mm(.197")
Poles 2P~12P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	22A
Wire size	22-12AWG	1.0-2.0mm ²
Pitch	5.0mm(.197")	
Poles	2P~12P	



DG302-5.0




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 20A 25A
Wire size 20-12AWG 0.5-4.0mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	20A	25A
Wire size	20-12AWG	0.5-4.0mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	




DG302-5.0...88AH




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 20A 25A
Wire size 20-12AWG 0.5-4.0mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	20A	25A
Wire size	20-12AWG	0.5-4.0mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	



DG302-7.5




Approval
Standard **UL** **IEC**
Voltage 450V 300V
Current 25A 20A
Wire size 20-12AWG 0.5-4.0mm²
Pitch 7.5mm(.295")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	450V	300V
Current	25A	20A
Wire size	20-12AWG	0.5-4.0mm ²
Pitch	7.5mm(.295")	
Poles	2P,3P~24P	



DG125-5.0




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 12A 18A
Wire size 26-12AWG 2.5mm²
Pitch 5.0mm(.197") 5.08mm(.200")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	12A	18A
Wire size	26-12AWG	2.5mm ²
Pitch	5.0mm(.197") 5.08mm(.200")	
Poles	2P,3P~24P	




DG125-5.0...14AH




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 12A 18A
Wire size 26-12AWG 2.5mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	12A	18A
Wire size	26-12AWG	2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	



DG128-5.0




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	





DG128-5.0...12AH





Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.0mm(.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.0mm(.197")	
Poles	2P,3P~24P	





Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.0mm (.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	




Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.08mm (.200")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.08mm (.200")	
Poles	2P,3P~24P	

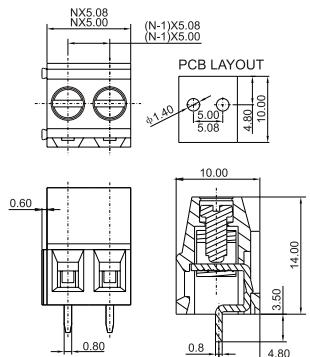



Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.0mm (.197") 5.08mm (.200")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

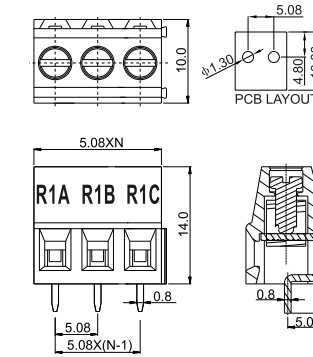



Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.0mm (.197")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.0mm (.197")	
Poles	2P,3P~24P	

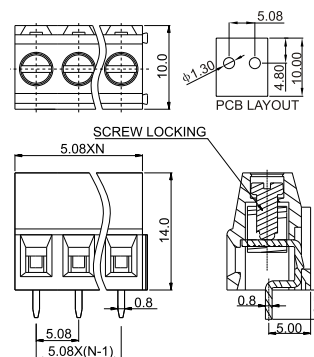



Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.08mm (.200")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.08mm (.200")	
Poles	2P,3P~24P	

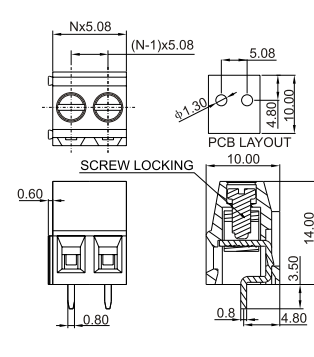



Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 15A 18A
Wire size 24-12AWG 2.5mm²
Pitch 5.08mm (.200")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	15A	18A
Wire size	24-12AWG	2.5mm ²
Pitch	5.08mm (.200")	
Poles	2P,3P~24P	

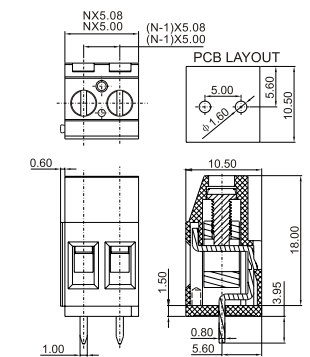

Approval
Standard **UL** **IEC**
Voltage 300V 250V
Current 20A 20A
Wire size 26-12AWG 0.5-2.5mm²
Pitch 5.0mm (.197") 5.08mm (.200")
Poles 2P,3P~24P

Standard	UL	IEC
Voltage	300V	250V
Current	20A	20A
Wire size	26-12AWG	0.5-2.5mm ²
Pitch	5.0mm (.197") 5.08mm (.200")	
Poles	2P,3P~24P	

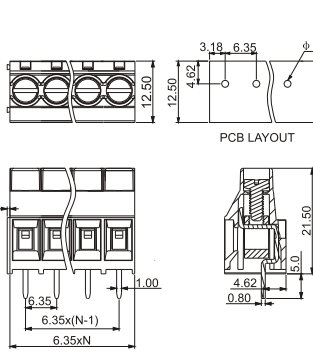

Approval
Standard **UL** **IEC**
Voltage 450V 300A
Current 24A 30A
Wire size 26-10AWG 0.2-4.0mm²
Pitch 6.35mm (.250")
Poles 2P,3P~12P

Standard	UL	IEC
Voltage	450V	300A
Current	24A	30A
Wire size	26-10AWG	0.2-4.0mm ²
Pitch	6.35mm (.250")	
Poles	2P,3P~12P	

COLOR	STANDARD COLOR	SPECIAL COLOR		COLOR	STANDARD COLOR
GREY				BLACK	
	PANTONE 430C DEGSON 01	PANTONE 429C DEGSON 41	PANTONE 421U DEGSON 61		PANTONE 419C DEGSON 03
COLOR	STANDARD COLOR	SPECIAL COLOR		COLOR	STANDARD COLOR
BLUE				TRANSPARENT	
	PANTONE 3015U DEGSON 02	PANTONE 2995U DEGSON 12	PANTONE 2925C DEGSON 22		PANTONE NATURAL COLOR DEGSON 17
COLOR	STANDARD COLOR	SPECIAL COLOR			
GREEN					
	PANTONE 556C DEGSON 04	PANTONE 369U DEGSON 14	PANTONE 356U DEGSON 34		
COLOR	STANDARD COLOR	SPECIAL COLOR			
ORANGE					
	PANTONE 167C DEGSON 05	PANTONE 158U DEGSON 15	PANTONE 1675C DEGSON 25		
COLOR	STANDARD COLOR	SPECIAL COLOR			
RED					
	PANTONE 208C DEGSON 06	PANTONE 222C DEGSON 36			
COLOR	STANDARD COLOR	SPECIAL COLOR			
YELLOW					
	PANTONE 108C DEGSON 08	PANTONE 465U DEGSON 28			
COLOR	STANDARD COLOR	SPECIAL COLOR			
WHITE					
	PANTONE 430C DEGSON 09	PANTONE 427C DEGSON 19			




KONICA MINOLTA
日本 柯尼卡

Spectrophotometer
分光测色计


品质认证 QUALITY CERTIFICATIONS

2013年DEGSON成为亚洲首家同时拥有美国UL和德国VDE认可实验室的企业。
In 2013, DEGSON laboratory is the first one in Asia which passes UL and VDE approved laboratory certification.

UL、VDE技术拜访 Visiting UL、VDE

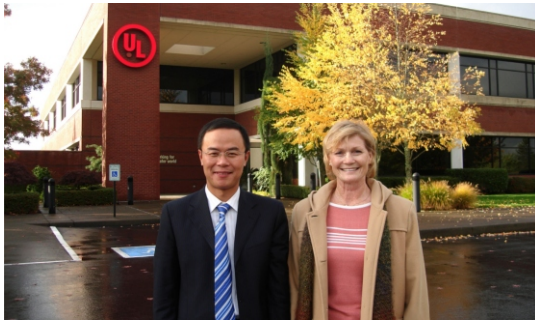

- ① 丁高松总经理到UL拜访，受到UL机构的热烈欢迎
① Visiting UL, UL office gave a warm welcome to our general manager Mr.Ding.

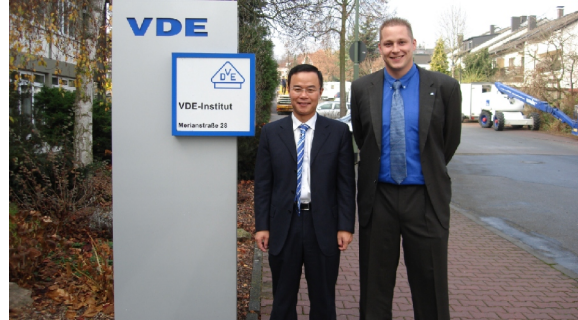


- ② 丁高松总经理到VDE拜访，受到VDE机构的热烈欢迎
② Visiting VDE, VDE office gave a warm welcome to our general manager Mr.Ding.




- ③ VDE实验室认可：2010年7月VDE正式向DEGSON颁发了“VDE认可实验室”证书。
UL实验室认可：2013年3月UL正式向DEGSON颁发“UL WTDP”证书。
③ VDE Laboratory Accreditation: In July 2010, VDE Issued the “VDE Authorized Laboratory” Certificate to DEGSON’s laboratory.
UL laboratory accreditation: UL formally issued “UL WTDP” certification to DEGSON in March 2013.




UL WTDP 实验室证书
UL Witness Test Data Program




VDE 认可实验室证书
VDE authorized laboratory




ISO9001



ISO14001




UL 证书号:E228872 1200种规格
UL File NO.:E228872 1200 items



150 VDE 证书 900种规格
150 VDE certificates for 900 items



GOST



600张SGS证书
600 certificates



环境政策

DEGSON® 认识到保护环境资源的重要性，并将其视为公司对社会应尽的义务，自觉满足产品的各项环保指标，为此我们制定以下环境战略方针：

- 1、满足客户需求，遵守国家和地方的法律、法规和其它环保要求。
- 2、环境保护为公司可持续发展的一项准则，坚持质量、效益和环保全面发展。
- 3、建立厂内废弃物管理，充分考虑在产品开发、生产、材料使用和废弃物处理等过程中可能影响环境的因素，提高企业内各场所的环境质量。
- 4、实施培训，全面提升全员的环境保护意识，实现环境管理体系和对环境保护能力的持续改进。
- 5、降耗节能，实现资源的充分利用。
- 6、向合作方及社会承诺为环境保护做出贡献。响应口号“人类只有一个地球”。
- 7、不断创新，开发新材料、新技术，制造节约型环保产品。

ENVIRONMENTAL POLICY

DEGSON realizes system regulation without lead in 2005 and has been granted ISO14001 in 2006. All the products conform to the European ROHS requirement.

DEGSON realizes the importance to protect environment resources, selfconsciously meets environment protection requirements for products and regards it as the responsibility. Thus, we have made the following environment strategic policy :

- 1、To meet customers' demands and obey the national and local laws and regulations as well as other environmental protection requirements.
- 2、Take environmental protection as one criterion for continuing development of our company. Insist on fully development of quality, benefit and environmental protection.
- 3、Fully considering the factors which will influence the environment in the processes of product development, manufacturing, material usage and waste processing, establish management system of waste in order to improve the environment of our company.
- 4、To increase the employees' consciousness of environmental protection through training and to realize the continuing improvement of environment management system and the ability of environmental protection.
- 5、To make full use of resources and to decrease consumption of material in order to save energy.
- 6、To promise to our partners and society that we will make contribution to environment protection. There is only one Earth for our humanity.
- 7、To strive for making conservation-oriented and environment-friendly products through continuous innovation and developing new materials and technology.