

CVH Series

Features

- $4\phi \sim 18\phi$, 105°C , 2,000 ~ 5,000 hours assured
- Large capacitance with ultra low impedance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

Specifications

Items	Performance									
Category Temperature Range	$-55^\circ\text{C} \sim +105^\circ\text{C}$									
Capacitance Tolerance	$\pm 20\%$ (at 120Hz, 20°C)									
Leakage Current (at 20°C) $I = 0.01CV$ or $3(\mu\text{A})$ whichever is greater (after 2 minutes) Where, C = rated capacitance in μF , V = rated DC working voltage in V										
Tanδ (at 120Hz, 20°C)	Rated Voltage	6.3	10	16	25	35	50	63	80	100
	Tanδ (max)	0.30	0.26	0.22	0.16	0.13	0.10	0.08	0.08	0.07
When the capacitance exceeds $1,000\mu\text{F}$, 0.02 shall be added every $1,000\mu\text{F}$ increase.										
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.									
	Rated Voltage	6.3	10	16	25	35	50	63	80	100
	Impedance Ratio	$Z(-25^\circ\text{C})/Z(+20^\circ\text{C})$	4	3	2	2	2	2	2	2
		$Z(-55^\circ\text{C})/Z(+20^\circ\text{C})$	8	5	4	3	3	3	3	3
Endurance	Test Time	2,000 Hrs for $\phi D \leq 6.3\text{mm}$ & $8 \times 6.5\text{L} \& 10\phi \times 7.7\text{L}$; 5,000 Hrs for $\phi D \geq 8\text{mm}$								
	Capacitance Change	Within $\pm 30\%$ of initial value								
	Tanδ	Less than 300% of specified value								
	Leakage Current	Within specified value								
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 ~ 5,000 hours at 105°C .										
Shelf Life Test	Test Time	1,000 Hrs								
	Capacitance Change	Within $\pm 30\%$ of initial value								
	Tanδ	Less than 300% of specified value								
	Leakage Current	Within specified value								
Ripple Current and Frequency Multipliers	Frequency(Hz)	50, 60	120	1k	10k up					
	Multiplier	0.60	0.70	0.85	1.0					

Diagram of Dimensions

Fig. 1


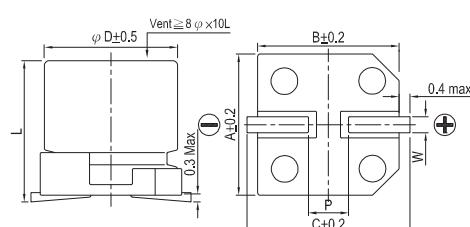


Fig. 2

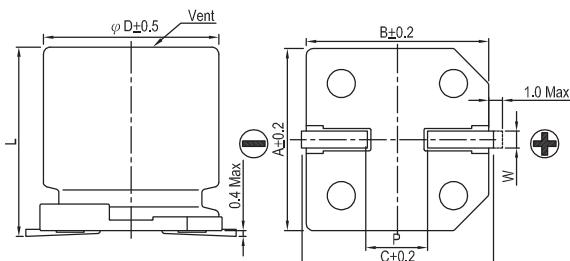


Lead Spacing and Diameter


ϕD	L	A	B	C	W	$P \pm 0.2$	Unit: mm	Fig. No.
								1
4	5.7 ± 0.3	4.3	4.3	5.1	$0.5 \sim 0.8$	1.0		
5	5.7 ± 0.3	5.3	5.3	5.9	$0.5 \sim 0.8$	1.5		
6.3	5.7 ± 0.3	6.6	6.6	7.2	$0.5 \sim 0.8$	2.0		
6.3	7.7 ± 0.3	6.6	6.6	7.2	$0.5 \sim 0.8$	2.0		
8	6.5 ± 0.3	8.4	8.4	9.0	$0.5 \sim 0.8$	2.3		
8	10 ± 0.5	8.4	8.4	9.0	$0.7 \sim 1.1$	3.1		
10	7.7 ± 0.3	10.4	10.4	11.0	$0.7 \sim 1.3$	4.7		
10	10 ± 0.5	10.4	10.4	11.0	$0.7 \sim 1.3$	4.7		
12.5	13.5 ± 0.5	13.0	13.0	13.7	$1.1 \sim 1.4$	4.4		2
12.5	16 ± 0.5	13.0	13.0	13.7	$1.1 \sim 1.4$	4.4		2
16	16.5 ± 0.5	17.0	17.0	18.0	$1.1 \sim 1.4$	6.4		2
16	21.5 ± 0.5	17.0	17.0	18.0	$1.1 \sim 1.4$	6.4		2
18	16.5 ± 0.5	19.0	19.0	20.0	$1.1 \sim 1.4$	6.4		2
18	21.5 ± 0.5	19.0	19.0	20.0	$1.1 \sim 1.4$	6.4		2

Marking


$\phi D \leq 6.3\text{mm}$

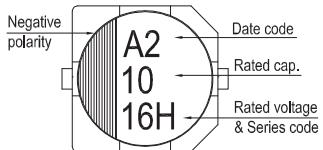

$\phi D = 8 \sim 10 \text{ mm}$

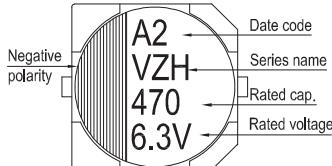

$\phi D \geq 12.5\text{mm}$

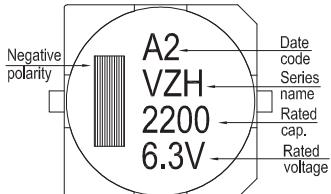

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance: Ω at 100k Hz, 20°C

Dimension and Permissible Ripple Current

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance: Ω/ at 100k Hz, 20°C

Dimension and Permissible Ripple Current

μF	V. DC Contents	63V (1J)			80V (1K)			100V (2A)		
		φ D×L	Imp.	mA	φ D×L	Imp.	mA	φ D×L	Imp.	mA
4.7	4R7	5×5.7	1.90	70						
10	100	6.3×5.7	1.20	130						
22	220	6.3×7.7	0.90	150	8×10	1.3	130	8×10	1.3	130
33	330	8×10	0.50	280	8×10	1.3	130	10×10	0.7	200
47	470	8×10	0.50	280	10×10	0.7	200	10×10	0.7	200
100	101	10×10	0.25	450	10×10	0.7	200	12.5×13.5	0.32	450
150	151	12.5×13.5	0.15	700	12.5×13.5	0.32	450	12.5×16	0.26	550
220	221	12.5×13.5	0.15	700	12.5×16	0.26	550	16×16.5 18×21.5	0.17 0.15	650 950
330	331	16×16.5	0.082	900	16×16.5	0.17	650	18×16.5 16×21.5	0.15 0.15	850 900
470	471	16×16.5	0.082	900	16×21.5	0.15	900	18×21.5	0.15	950
680	681	18×16.5 16×21.5	0.080 0.080	1,150 1,150	18×21.5	0.15	950			
1,000	102	18×21.5	0.06	1,250						

Part Numbering System for the SMD Type

When you place an order for Cal-chip electrolytic capacitors, please refer to our part number as shown below.

CV2 series	16V	10 μ F	$\pm 20\%$	4 $\varphi \times 5.3L$	Carrier tape
CV2	1C	100	M	D55	R
① Series name	② Rated voltage	③ Capacitance	④ Capacitance tolerance	⑤ Symbol of case size	⑥ Package type

① Series:

Series is represented by a three digit code.



② Rated Voltage: Voltage on volts (V) is represented by two digit code showing the real working voltage: OG=4V, OJ=6.3V, 1A=10V, 1C=16V, 1E=25V, 1V=35V, 1H=50V, 1J=63V, 1K=80V, 2A=100V, 2C=160V, 2D=200V, 2E=250V, 2G=400V and 2W=450V

③ Capacitance:

Rated capacitance in μ F is represented by a three digit number. The first two digits are the significant figures of the nominal capacitance and the third digit indicates the number of zeros following these figures. The decimal point is represent by the capital letter R. Please refer to the following example:

μ F	0.1	0.47		4.7		47	100	470	1000
Part number	0R1	R47	010	4R7	100	4	101	4	

④ Tolerance:

Symbol of W, T, Q, V, M, K and J show special capacitance tolerance which are listed as follows:

W = -10% ~ +100%	M = -20% ~ +20%
T = -10% ~ +50%	K = -10% ~ +10%
Q = -10% ~ +30%	J = -5% ~ +5%
V = -10% ~ +20%	

⑤ Case Size: Symbol of case size are listed as follows:

$\varphi D \times L$ (mm)	Symbol						
3×5.3	B55	6.3×5.3	F55	8×6.5	G68	10×10.0	H10
4×5.3	D55	6.3×5.7	F60	8×7.0	G72	10×13.0	H13
4×5.7	D60	6.3×6.0	F62	8×10.0	G10	12.5×13.5	
5×5.3	E55	6.3×7.0	F72	8×12.0	G12	12.5×16.0	
5×5.7	E60	6.3×7.7	F80	10×8.0	H82	16×16.5	L17

⑥ Package type:

R = Taping polarity symbol with reel package in 380 mm