


CE32 Type

Features


- 105°C, 1000 hours assured
- Vertical chip type miniaturized for 5.5mm, high capacitor

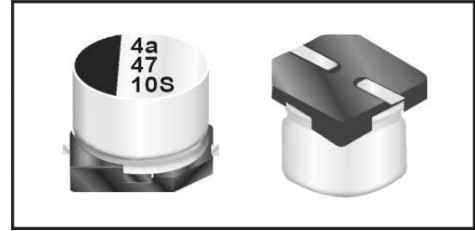

SPECIFICATIONS

Items	Performance																													
Operating Temperature Range	-55℃ ~ +105℃																													
Capacitance Tolerance	± 20% (at 120Hz, 20℃)																													
Leakage Current (at 20℃)	I = 0.01CV or 3 (μ A) whichever is greater (after 2 minutes) Where, C= rated capacitance in μ F. V = rated DC working voltage in V.																													
Dissipation Factor (Tan δ at 120Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>Tan δ (max)</td><td>0.30</td><td>0.26</td><td>0.22</td><td>0.16</td><td>0.13</td><td>0.12</td></tr></table>							Rated Voltage	6.3	10	16	25	35	50	Tan δ (max)	0.30	0.26	0.22	0.16	0.13	0.12									
Rated Voltage	6.3	10	16	25	35	50																								
Tan δ (max)	0.30	0.26	0.22	0.16	0.13	0.12																								
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td colspan="2">Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td rowspan="2">Impedance Ratio</td><td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(+20℃)</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td></tr></table>							Rated Voltage		6.3	10	16	25	35	50	Impedance Ratio	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	Z(-40℃)/Z(+20℃)	8	5	4	3	3	3
Rated Voltage		6.3	10	16	25	35	50																							
Impedance Ratio	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2																							
	Z(-40℃)/Z(+20℃)	8	5	4	3	3	3																							
Load Life Test	<table><tr><td>Test Time</td><td>1000 Hrs</td></tr><tr><td>Capacitance Change</td><td>Within ±20% of initial value</td></tr><tr><td>Dissipation Factor</td><td>Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td>Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20℃after the rated voltage applied with rated ripple current for 1000 hrs at 105℃.							Test Time	1000 Hrs	Capacitance Change	Within ±20% of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value															
Test Time	1000 Hrs																													
Capacitance Change	Within ±20% of initial value																													
Dissipation Factor	Less than 200% of specified value																													
Leakage Current	Within specified value																													
Shelf Life Test	Test time: 1000 hrs; other items are the same as those for the load life test.																													
Ripple Current & Frequency Multipliers	<table><tr><td>V.DC(V) \ Freq.(Hz)</td><td>50</td><td>120</td><td>1K</td><td>10K up</td></tr><tr><td>Under 16</td><td>0.8</td><td>1.0</td><td>1.15</td><td>1.25</td></tr><tr><td>25 ~ 35</td><td>0.8</td><td>1.0</td><td>1.25</td><td>1.40</td></tr><tr><td>50</td><td>0.8</td><td>1.0</td><td>1.35</td><td>1.50</td></tr></table>							V.DC(V) \ Freq.(Hz)	50	120	1K	10K up	Under 16	0.8	1.0	1.15	1.25	25 ~ 35	0.8	1.0	1.25	1.40	50	0.8	1.0	1.35	1.50			
V.DC(V) \ Freq.(Hz)	50	120	1K	10K up																										
Under 16	0.8	1.0	1.15	1.25																										
25 ~ 35	0.8	1.0	1.25	1.40																										
50	0.8	1.0	1.35	1.50																										
Other Standards	JIS C 5101-1,-18																													

DIAGRAM OF DIMENSIONS

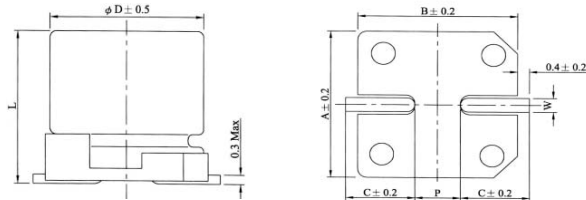

LEAD SPACING AND DIAMETER

Unit: mm

φ D	L	A	B	C	W	P±0.2
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0

Dimension: φ D × L(mm)

DIMENSION & PERMISSIBLE RIPPLE CURRENT

Ripple Current: mA/rms at 120 Hz, 105°C

μF	V.DC	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
	Contents	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
0.1	0R1											4×5.3	2
0.22	R22											4×5.3	3
0.33	R33											4×5.3	4
0.47	R47											4×5.3	5
1	010											4×5.3	7
2.2	2R2											4×5.3	10
3.3	3R3											4×5.3	12
4.7	4R7							4×5.3	12	4×5.3	14	5×5.3	17
10	100			4×5.3	15	4×5.3	16	5×5.3	21	5×5.3	23	6.3×5.3	26
22	220	4×5.3	21	5×5.3	25	5×5.3	28	6.3×5.3	36	6.3×5.3	50	6.3×5.3	51
33	330	5×5.3	30	5×5.3	31	6.3×5.3	40	6.3×5.3	44				
47	470	5×5.3	36	6.3×5.3	43	6.3×5.3	47	6.3×5.3	60				
100	101	6.3×5.3	61	6.3×5.3	65	6.3×5.3	70						