

FBU series for DC power line

Rated Current: 4-6 A



FEATURES


The FBU series can be used on high current circuits due to its low DC resistance. It can match power lines to a maximum of 6A DC.

APPLICATION

High current DC power line EMI suppression. Examples:


1. CD-ROMs
2. Hard Drives
3. Modems
4. Monitors
5. Motherboards
6. Printers

SHAPES AND DIMENSIONS

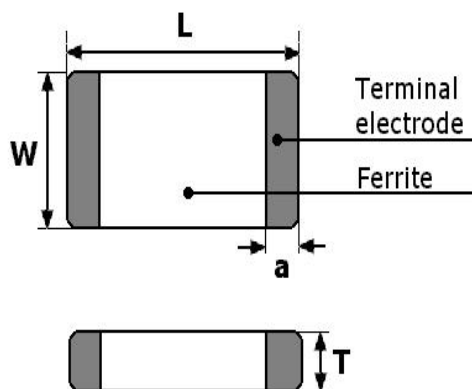

SHAPE	L m/m	W m/m	T m/m	a m/m
201209(0805)	2.0±0.2	1.25±0.2	0.9+0.15/-0.2	0.2~0.8
321611(1206)	3.2±0.2	1.6±0.2	1.1±0.2	0.4~1.0
321616(1206H)	3.2±0.2	1.6±0.2	1.6±0.2	0.4~1.0
322513(1210)	3.2±0.2	2.5±0.2	1.3±0.2	0.6~1.0
451616(1806)	4.5±0.2	1.6±0.2	1.6±0.2	0.6~1.0
453215(1812)	4.5±0.2	3.2±0.2	1.5±0.2	0.6~1.0

CALCHIP PART NUMBERING SYSTEM			
FBU	201209	T	600Y-S

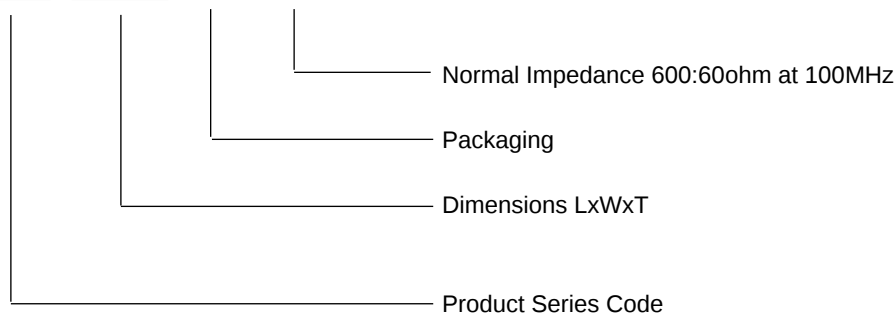


MULTILAYER CHIP SUPPRESSORS (CHIP BEADS)

FBU series for DC power line

Rated Current : 4-6A

EQUIVALENT CIRCUIT DIAGRAM



•No directionality



Electrical characteristics

Part Number	Impedance (Ω) $\pm 25\%$ [100MHz]	DC Resistance Ω (MAX)	Rated Current mA (MAX)
2012			
FBU201209T-070Y-S	7	0.008	6000
FBU201209T-110Y-S	11	0.008	6000
FBU201209T-170Y-S	17	0.008	6000
FBU201209T-300Y-S	30	0.008	6000
FBU201209T-390Y-S	39	0.008	6000
FBU201209T-600Y-S	60	0.020	6000
FBU201209T-800Y-S	80	0.020	6000
FBU201209T-121Y-S	120	0.020	6000
3216			
FBU321611T-310Y-S	31	0.006	6000
FBU321611T-520Y-S	52	0.008	6000
FBU321611T-800Y-S	80	0.020	4000
FBU321611T-121Y-S	120	0.020	4000
3225			
FBU322513T-520Y-S	52	0.008	6000
FBU322513T-600Y-S	60	0.008	6000
4516			
FBU451616T-600Y-S	60	0.008	6000
4532			
FBU453215T-600Y-S	60	0.008	6000
FBU453215T-121Y-S	120	0.020	4000
FBU453215T-151Y-S	150	0.020	4000

* TEST EQUIPMENT: E4991A IMPEDANCE ANALYZER

: E4991A


FBU series for DC power line

Rated Current : **4-6A**


TYPICAL ELECTRICAL CHARACTERISTICS

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS.


FBU201209T-070Y-S

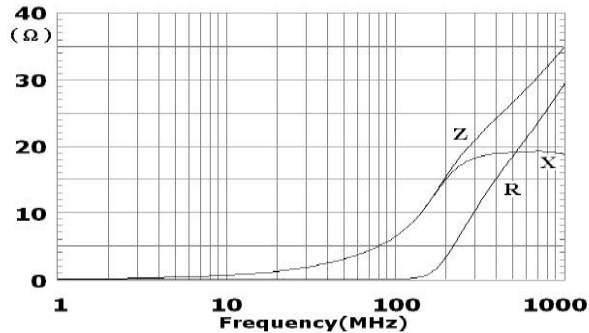


FBU201209T-110Y-S

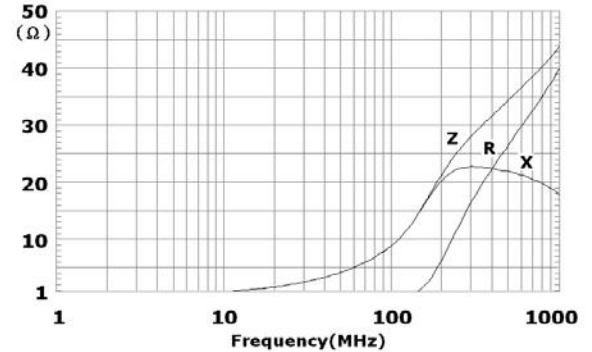


FBU201209T-170Y-S

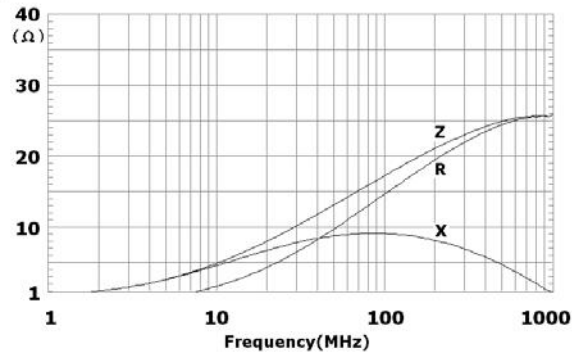


FBU201209T-300Y-S

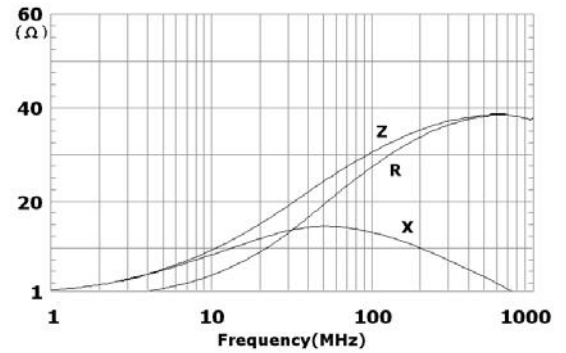


FBU201209T-390Y-S

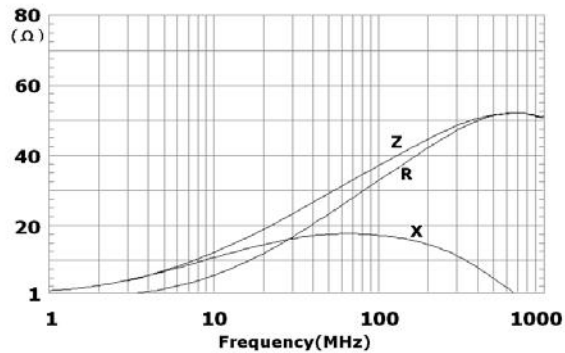


FBU201209T-600Y-S

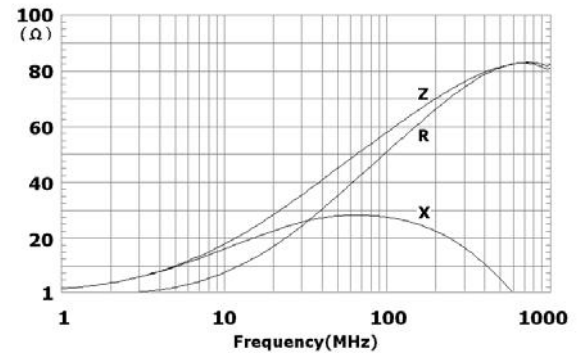

FBU201209T-800Y-S

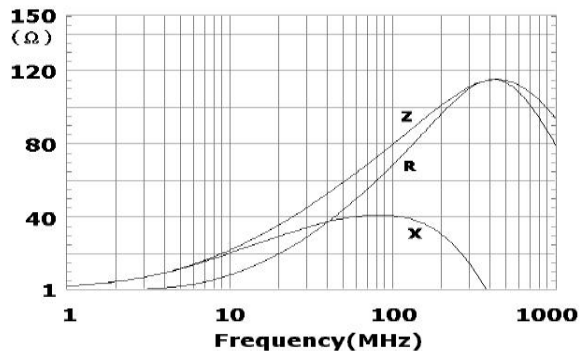

FBU201209T-121Y-S

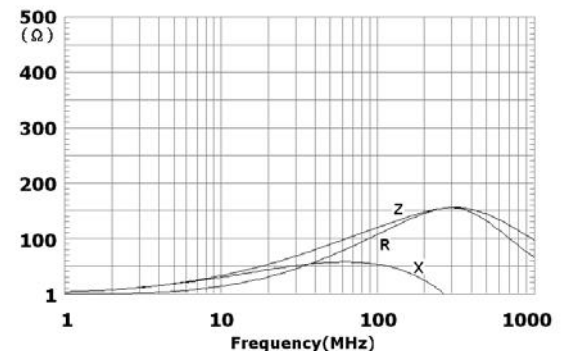


FBU series for DC power line

Rated Current : **4-6A**


TYPICAL ELECTRICAL CHARACTERISTICS

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS.


FBU321611T-310Y-S

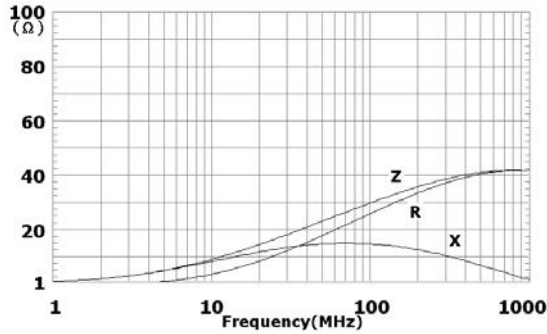


FBU321611T-520Y-S

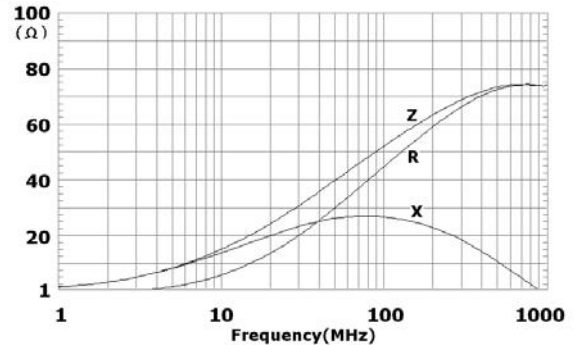


FBU321611T-800Y-S

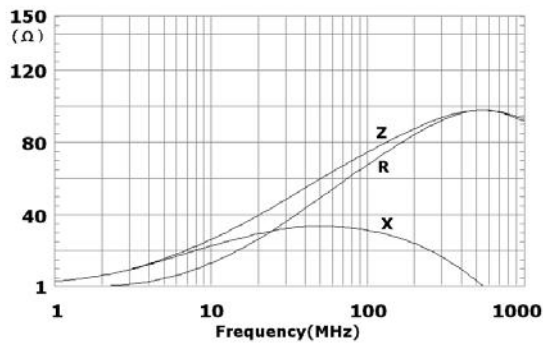


FBU321611T-121Y-S

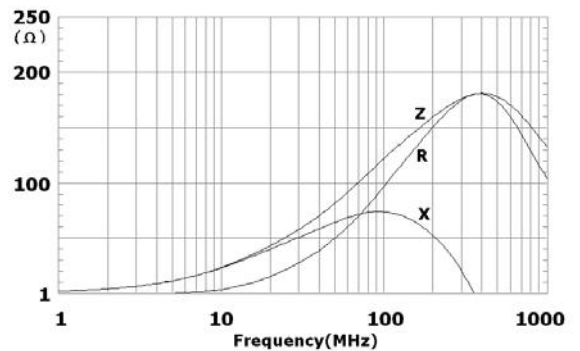


FBU322513T-520Y-S

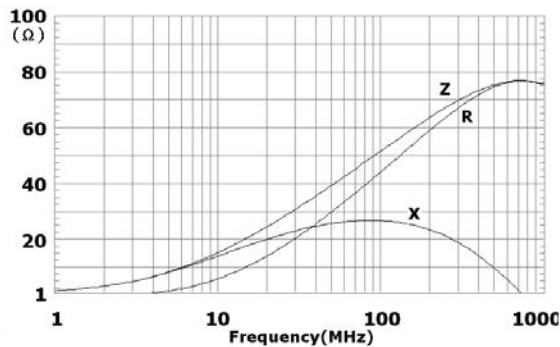

FBU322513T-600Y-S

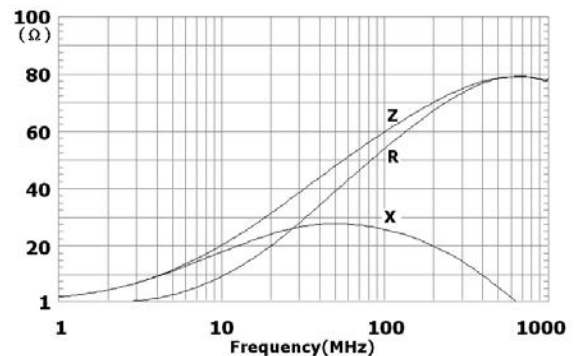

FBU451616T-600Y-S

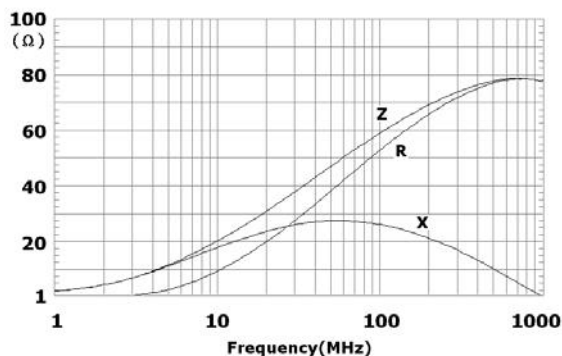


FBU series for DC power line

Rated Current : **4-6A**


TYPICAL ELECTRICAL CHARACTERISTICS

Z R X vs. FREQUENCY CHARACTERISTICS Z,R,X VS.

FBU453215T-600Y-S

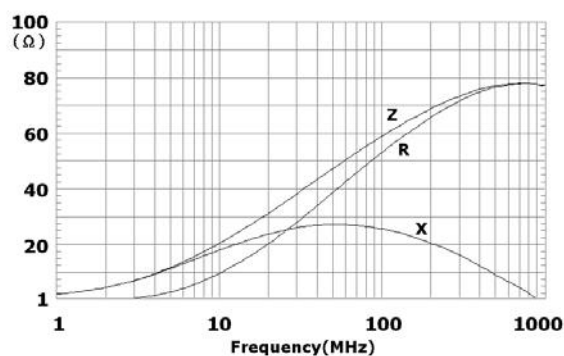

FBU453215T-121Y-S

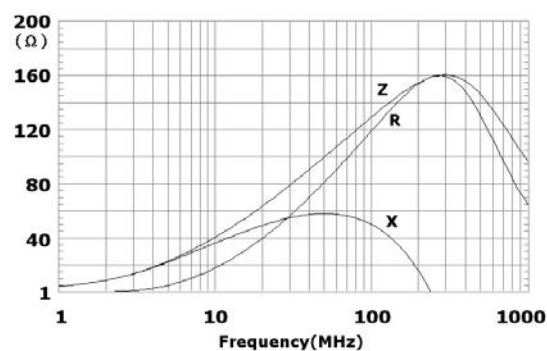

FBU453215T-151Y-S

