

System CH - Technical Specifications

Testing Methods of Electronic Connectors Follow Below Military Standards:

Dielectric Withstanding Voltage	- Per MIL-STD-1344A method 3001.1
Contact Resistance	- Per MIL-STD-1344A method 3002.1
Insulation Resistance	- Per MIL-STD-1344A method 3003.1
Solderability	- Per MIL-STD-202F method 208D

0.80mm(.032") Center spacing Pin Headers

Electrical:	Physical:
Current rating: 0.5 Amp	High temperature plastic , Color Black
Dielectric Withstanding: 500 VAC for one minute	Flammability Rating: UL 94V-0
Contact Resistance: < 20 mΩ	Contacts: Copper alloy
Insulation Resistance: > 1000 MΩ	Contact plating: Gold flash over Nickel
Operating Temperature: -40°C ~ +85°C	Please see ordering code for plating options

1.00mm(.039") Center spacing Pin Headers

Electrical:	Physical:
Current rating: 1 Amp	High temperature plastic , Color Black
Dielectric Withstanding: 300 VAC for one minute	Flammability Rating: UL 94V-0
Contact Resistance: < 20 mΩ	Contacts: Phosphor Bronze
Insulation Resistance: > 1000 MΩ	Contact plating: Gold flash over Nickel
Operating Temperature: -40°C ~ +105°C	Please see ordering code for plating options

1.27mm(.050") Center spacing Pin Headers

Electrical:	Physical:
Current rating: 1 Amp	High temperature plastic , Color Black
Dielectric Withstanding: 600 VAC for one minute	Flammability Rating: UL 94V-0
Contact Resistance: < 20 mΩ	Contacts: Copper alloy
Insulation Resistance: > 1000 MΩ	Contact plating: Gold flash over Nickel
Operating Temperature: -40°C ~ +85°C	Please see ordering code for plating options

2.00mm(.079") Center spacing Pin Headers

Electrical:	Physical:
Current rating: 1 Amp	DIP Type Header: Glass Filled Polyester , Color Black
Dielectric Withstanding: 1000 VAC for one minute	SMT Type Header:
Contact Resistance: < 20 mΩ	High temperature plastic , Color Black
Insulation Resistance: > 1000 MΩ	Flammability Rating: UL 94V-0
Operating Temperature: -40°C ~ +105°C	Contacts: Brass
	Contact plating: Gold flash over Nickel
	Please see ordering code for plating options



2.54mm(.100") Center spacing Pin Headers

Electrical:	Physical:
Current rating: 3 Amp	DIP Type Header: Glass Filled Polyester , Color Black
Dielectric Withstanding: 1500 VAC for one minute	SMT Type Header:
Contact Resistance: < 20 mΩ	High temperature plastic , Color Black
Insulation Resistance: > 1000 MΩ	Flammability Rating: UL 94V-0
Operating Temperature: -40°C ~ +105°C	Contacts: Brass
	Contact plating: Gold flash over Nickel
	Please see ordering code for plating options


CHC3 Series 0.80mm(.032") Dual Row SMT Pin Headers

- ⊙ Mate with CBC3 Series
- ⊙ SMT Tail
- ⊙ With mounting Pegs
- ⊙ High temperature plastic, Color Black



RoHS Compliant 

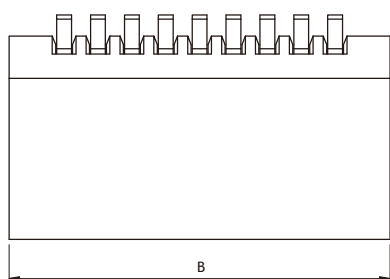

$$\begin{aligned} A &= 0.8 \times \text{No. of Spaces} \\ B &= A + 2.6 \\ C &= A + 1.8 \end{aligned}$$

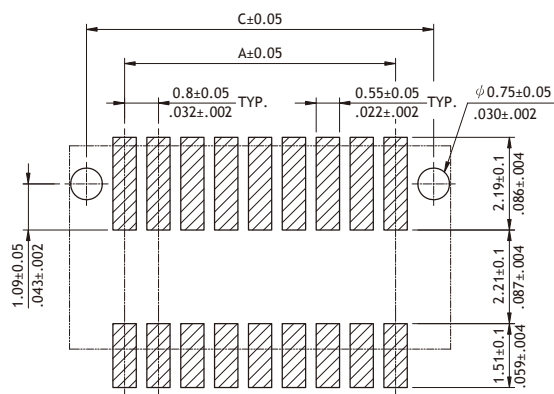

Recommended PCB Layout

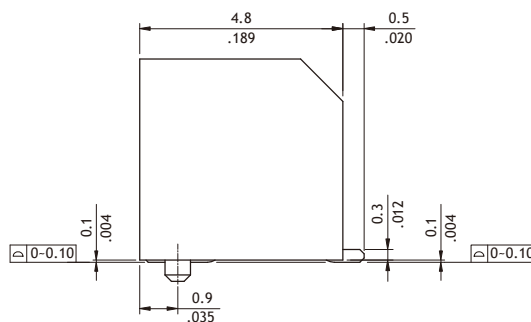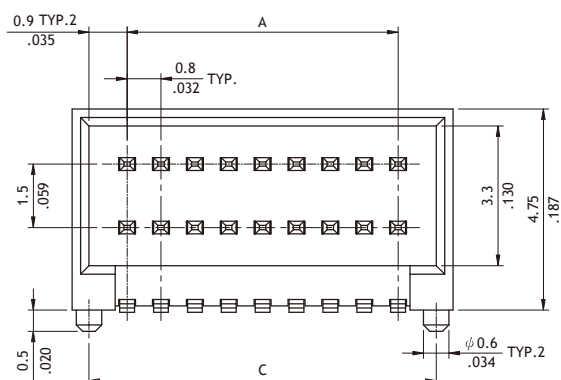

Ordering Code

①	②	③	④	⑤	⑥	⑦
CHC3	36	2	M	1	R	0

- ① Series No.
- ② No. of Circuits: 06 to 36
- ③ Plating Code:
 - 1 = Tin over Nickel
 - 2 = Gold flash over Nickel
- ④ Tail & Mounting Style: M = SMT Type
- ⑤ Color: 1 = Black

- ⑥ Packing:
 - R = Tape & Reel
 - T = Tube
- ⑦ Other Options:
 - 0 = Standard
 - *Special options consult manufacturer

CH07 Series 1.00mm(.039") SMT Row Board Mount Connectors


☉ Mate with CB03 series

RoHS Compliant 




NEW


P/N: CH07**2V100-NH




A = 1.0" No. of Spaces
B = A + 1.0





P/N: CH07**2H100-NH

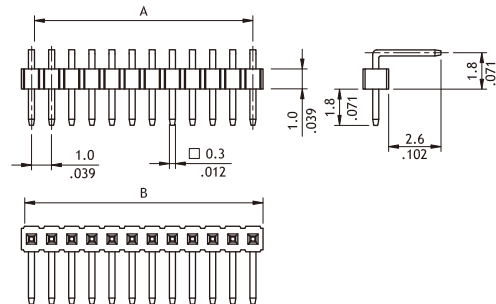

P/N: CH07**2T100-NH



A = 1.0" No. of Spaces
B = A + 1.0

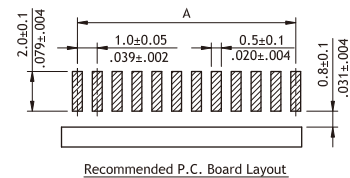


Ordering Code

① CH 07 ② 2 ③ 6 ④ 2 ⑤ T ⑥ 1 ⑦ 0 0 - NH




- ① Series No.
- ② No. of Circuits: 2 to 40
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail Style: T = Side Entry SMT Type
V = Straight DIP Type
H = Right Angle DIP Type
- ⑤ Color: 1 = Black
- ⑥ Pin Length Options:
- ⑦ Process: NH = For Lead Free IR process and Halogen-Free

CH16 Series 1.00mm(.039") Dual Row Pin Headers

☉ Mate with CB03 series



NEW

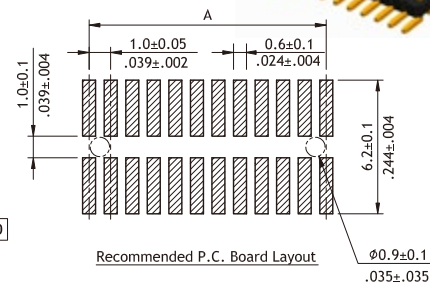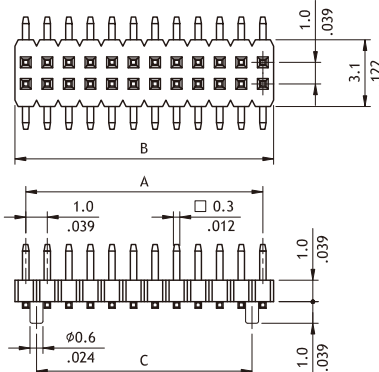


Ordering Code

① CH 16 ② 2 ③ 6 ④ 2 ⑤ M ⑥ 1 ⑦ 0 0 - ⑧ 0 0


- ① Series No.
- ② No. of Circuits: 6 to 100
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail Style: M = SMT Type
- ⑤ Color: 1 = Black
- ⑥ Pin Length Options:
- ⑦ Pin Size: 0 = Without Pegs
0 = With Pegs
- ⑧ Packing: 0 = Without Pick & Place Pad (Tube)

CH01 Series 1.27mm(.050") Single Row Pin Headers

☉ Mate with CB01 series


RoHS Compliant  

P/N CH01**2V100-NH

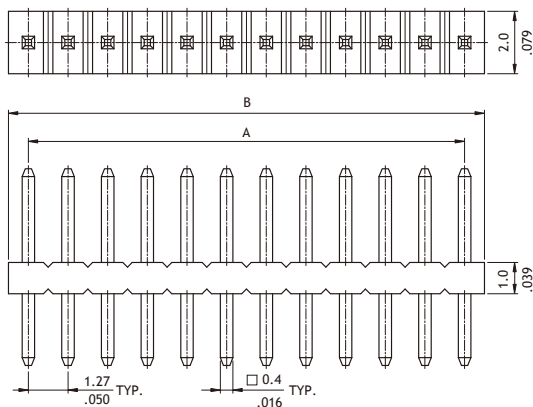


A = 1.27 X No. of Spaces
 B = A + 1.27
 Pin overall length 20.0mm max.

Option Code	Pin Dimension	
	C	D
00	3.0(.118)	2.3(.091)
01	3.0(.118)	1.6(.063)
02	3.5(.138)	1.8(.071)
03	3.8(.150)	1.5(.059)





Recommended PCB Layout

P/N CH01**2M100**-NH

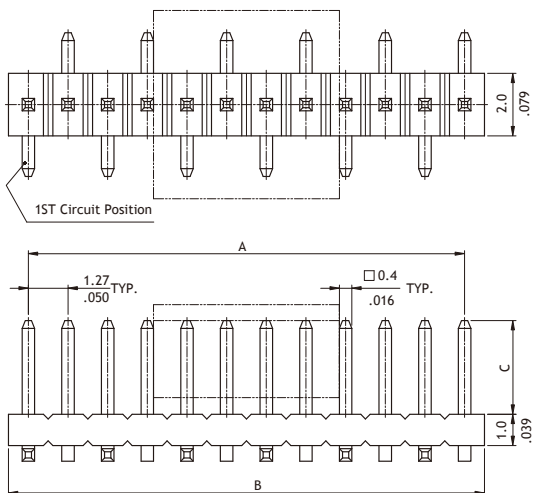

A = 1.27 X No. of Spaces
 B = A + 1.27

Option Code	Pin Dimension		
	C	D	F
00	3.0(.118)	1.5(.059)	4.6(.181)



Recommended PCB Layout

Ordering Code

① CH ② 01 ③ 50 ④ 2 ⑤ V ⑥ 1 ⑦ 00 - ⑧ 00 - NH

① Series No.

② No. of Circuits: 04 to 50

③ Plating Code:

2 = Gold flash over Nickel

④ Tail & Mounting Style:

V = Vertical DIP Type

M = SMT Type

⑤ Insulator Material & Color: 1=LCP, Color Black

⑥ Other Options: 00 = Standard

*See option code table

*Consult manufacturer for customized pin length

⑦ Packing Options:

00 = Without Pick & Place Pad (Tube)

0P = With Pick & Place Pad (Tape & Reel)

*Code 7 for SMT Type only

⑧ Process: -NH = For Lead Free soldering process and Halogen-Free


CH02 Series 1.27mm(.050") Single Row Pin Headers

☉ Mate with CB01 series

RoHS Compliant 





P/N CH02**2V100

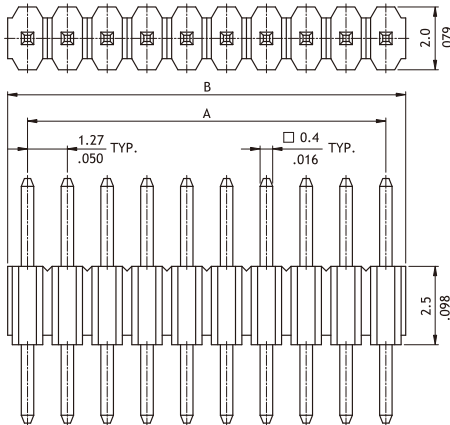


A = 1.27 X No. of Spaces
B = A + 1.27
Pin overall length 20.0mm max.

Option Code	Pin Dimension	
	C	D
00	3.0(.118)	2.3(.091)





Recommended PCB Layout

P/N CH02**2M100-**-**

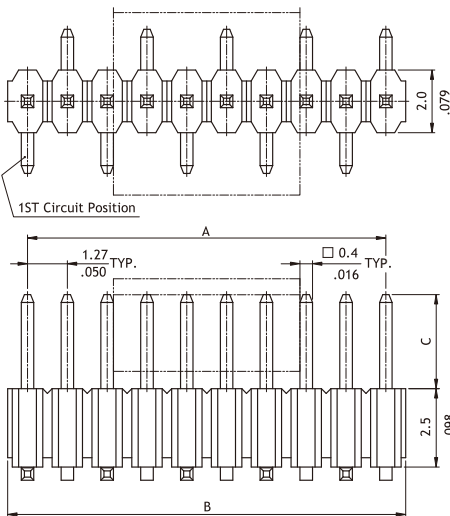

A = 1.27 X No. of Spaces
B = A + 1.27

Option Code	Pin Dimension		
	C	D	F
00	3.0(.118)	2.92(.115)	4.6(.181)
01	8.0(.315)	3.0(.118)	4.6(.181)



Recommended PCB Layout

Ordering Code

① CH ② 0 ③ 2 ④ V ⑤ 1 ⑥ 00 - ⑦ 00


- ① Series No.
- ② No. of Circuits: 04 to 50
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail & Mounting Style:
V = Vertical DIP Type
M = Vertical SMT Type
- ⑤ Insulator Material & Color: 1 = Nylon 6T, Color Black

- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Packing Options:
00 = Without Pick & Place Pad (Tube)
0P = With Pick & Place Pad (Tape & Reel)
*Code 7 for SMT Type only


CH03 Series 1.27mm(.050") Single Row Dual Bodies Pin Headers

☉ Mate with CB01 series

RoHS Compliant 





P/N CH03**2V100

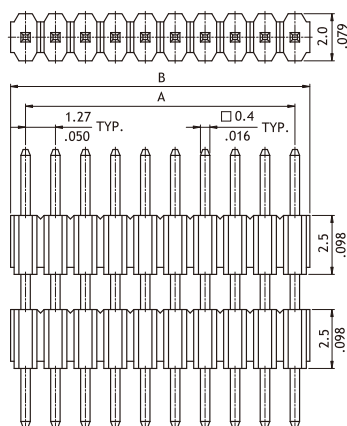


A = 1.27 X No. of Spaces
B = A + 1.27
E = 5.0 min.
Pin overall length 20.0mm max.

Option Code	Pin Dimension		
	C	D	E
00	3.0(.118)	2.3(.091)	5.0(.197)





Recommended PCB Layout

P/N CH03**2M100-**

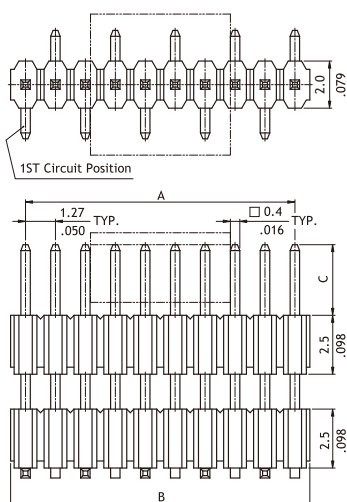

A = 1.27 X No. of Spaces
B = A + 1.27

Option Code	Pin Dimension			
	C	D	E	F
00	3.0(.118)	2.92(.115)	2.5(.098)	5.0(.197)



Recommended PCB Layout

Ordering Code

① CH 03 ② 50 ③ 2 ④ V ⑤ 1 ⑥ 00 - ⑦ 00





- ① Series No.
- ② No. of Circuits: 04 to 50
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail & Mounting Style:
V = Vertical DIP Type
M = Vertical SMT Type
- ⑤ Insulator Material & Color: 1 = Nylon 6T, Color Black

- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Packing Options:
00 = Without Pick & Place Pad (Tube)
0P = With Pick & Place Pad (Tape & Reel)
*Code 7 for SMT Type only


CH06 Series 1.27mm(.049") Straight SMT Dual Row Shrouded Headers

- Mate with CA02 series
- Box type with positive locking latch
- With polarizing slot

RoHS Compliant  

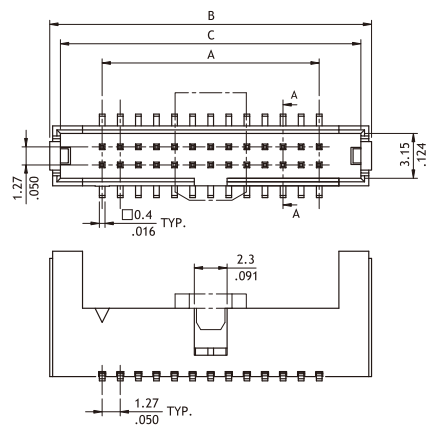

Circuits	Dimension		
	A	B	C
6	2.54(.100)	9.91(.390)	8.40(.331)
14	7.62(.300)	14.99(.590)	13.48(.531)
26	15.24(.600)	22.61(.890)	21.10(.831)

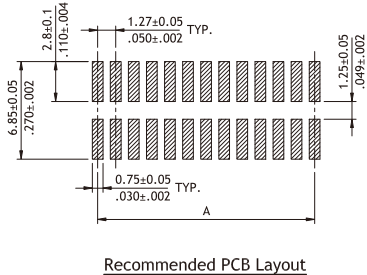

Ordering Code

① CH06 ② 26 ③ 2 ④ M ⑤ A ⑥ L0 - ⑦ NH

- ① Series No.

② No. of Circuits: 6,14,26

③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail Style: M = SMT Type

⑤ Color: A = Black

⑥ Other Options: L0 = Latch Type

⑦ -Process: NH = For Lead Free IR process and Halogen-Free


CH51 Series 1.27mm(.050") Dual Row Pin Headers

☉ Mate with CB50 and CBC1 series

RoHS Compliant  






P/N CH51**2V100-NH




A = 1.27 X No. of Spaces
B = A + 1.27
Pin overall length 20.0mm max.

Option Code	Pin Dimension	
	C	D
00	3.0(.118)	2.3(.091)

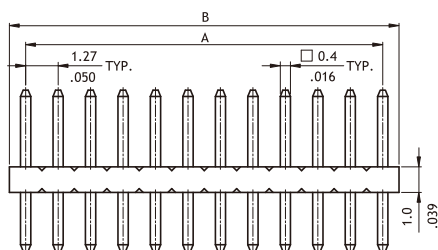




Recommended PCB Layout

P/N CH51**2H100-NH

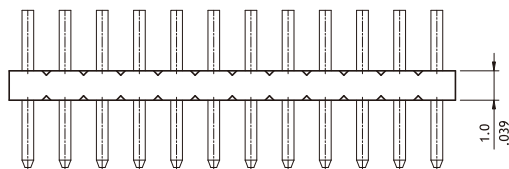

A = 1.27 X No. of Spaces
B = A + 1.27

Option Code	Pin Dimension		
	C	D	E
00	2.0(.079)	2.3(.091)	1.6(.063)

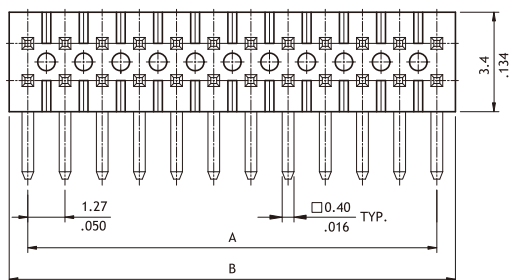

Recommended PCB Layout


Ordering Code

① CH 5 1 ② X 1 ③ 2 ④ V ⑤ 1 ⑥ 0 0 - ⑦ NH




- ① Series No.
- ② No. of Circuits: 06 to 100 (X1 = 100)
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail & Mounting Style: V = Vertical DIP Type
H = Right Angle DIP Type
- ⑤ Insulator Material & Color: 1 = LCP, Color Black
- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Process: -NH = For Lead Free soldering process and Halogen-Free

CH

RoHS Compliant  

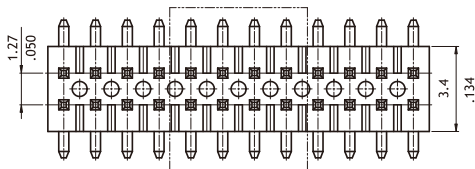

Option Code	Pin Dimension		
	C	D	F
00	3.0(.118)	1.5(.059)	5.5(.217)

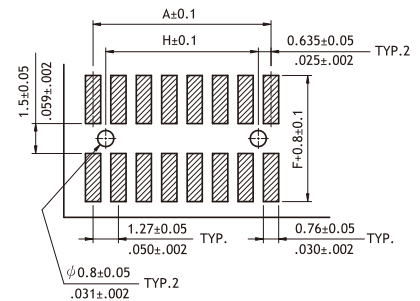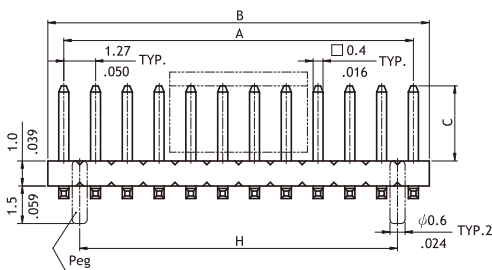

Ordering Code

①	②	③	④	⑤	⑥		⑦	⑧		⑨
CH5 1	X1	2	M	1	0 0	-	0	0	-	NH

- ⑦ Pegs Options:
P = With Pegs
0 = Without Peg
- ⑧ Packing Options:
0 = Without Pick & Place Pad (Tube)
P = With Pick & Place Pad (Tape & Reel)
- ⑨ Process: -NH = For Lead Free soldering process and Halogen-Free


CH52 Series 1.27mm(.050") Dual Row Pin Headers

☉ Mate with CB50 and CBC1 series

RoHS Compliant  





P/N CH52**2V100

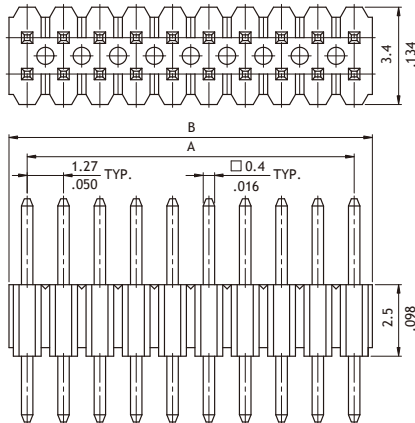


A = 1.27 X No. of Spaces
B = A + 1.27
Pin overall length 20.0mm max.

Option Code	Pin Dimension	
	C	D
00	3.0(.118)	2.3(.091)





Recommended PCB Layout

P/N CH52**2H100

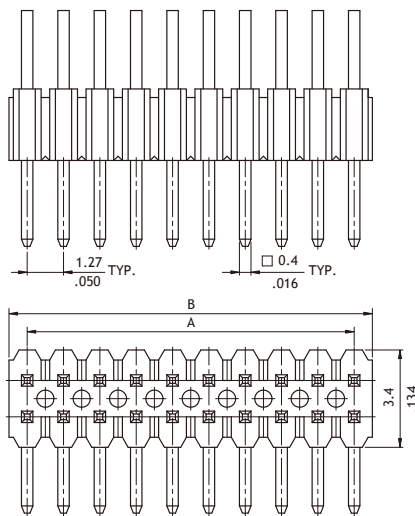

A = 1.27 X No. of Spaces
B = A + 1.27
Pin overall length 20.0mm max.

Option Code	Pin Dimension		
	C	D	E
00	3.0(.118)	2.3(.091)	1.27(.050)



Recommended PCB Layout

Ordering Code

① CH ② 5 ③ 2 ④ V ⑤ 1 ⑥ 00


- ① Series No.
- ② No. of Circuits: 06 to 100 (X1 = 100)
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail & Mounting Style: V = Vertical DIP Type
H = Right Angle DIP Type

- ⑤ Insulator Material & Color:
1 = Nylon 6T, Color Black
- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length

CH52 Series 1.27mm(.050") Dual Row SMT Pin Headers




☉ Mate with CB50 and CBC1 series

RoHS Compliant 

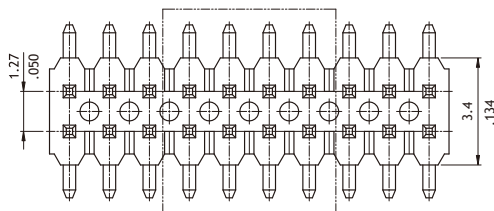

A = 1.27 X No. of Spaces
B = A + 1.27
H = A - 1.27

Option Code	Pin Dimension		
	C	D	E
00	3.0(.118)	2.92(.115)	5.5(.217)

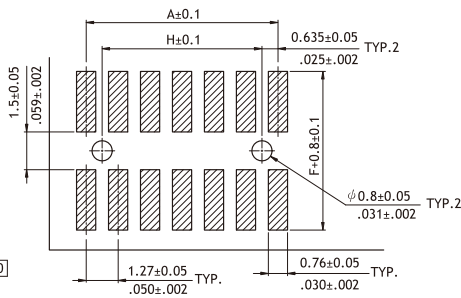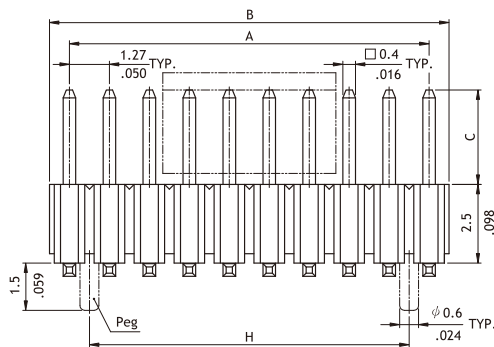

Recommended PCB Layout

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧
CH 5 2 X 1 2 M 1 0 0 - 0 0

- ① Series No.
- ② No. of Circuits: 06 to 100 (X1 = 100)
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail & Mounting Style: M = SMT Type
- ⑤ Insulator Material & Color: 1 = Nylon 6T, Color Black
- ⑥ Other Options: 00 = Standard

*See option code table

*Consult manufacturer for customized pin length

- ⑦ Pegs Options:
0 = Without Peg
P = With Pegs
- ⑧ Packing Options:
0 = Without Pick & Place Pad (Tube)
P = With Pick & Place Pad (Tape & Reel)


CH57 Series 1.27mm(.050") Dual Row Dual Bodies Pin Headers

☉ Mate with CB50 and CBC1 series

RoHS Compliant 





P/N CH57**2V100

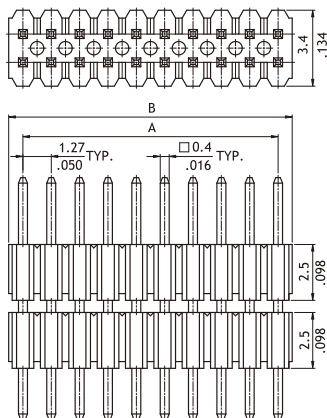


A = 1.27 X No. of Spaces
B = A + 1.27
Pin overall length 20.0mm max.

Option Code	Pin Dimension		
	C	D	E
00	3.0(.118)	2.3(.091)	5.0(.197)





Recommended PCB Layout

P/N CH57**2M100-**

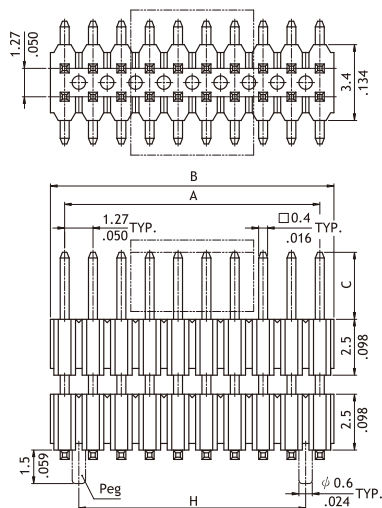

A = 1.27 X No. of Spaces
B = A + 1.27
H = A - 1.27

Option Code	Pin Dimension			
	C	D	E	F
00	3.0(.118)	2.92(.115)	2.5(.098)	5.5(.217)

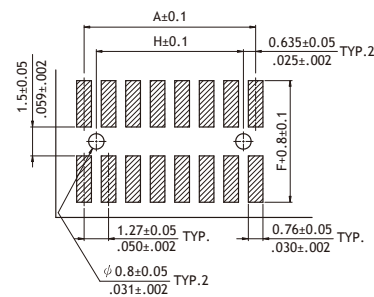

Recommended PCB Layout

Ordering Code

① CH ② 57 ③ X1 ④ 2 ⑤ M ⑥ 1 ⑦ 00 - ⑧ 0 0

① Series No.

② No. of Circuits:
06 to 100 (X1 = 100)

③ Plating Code:
2 = Gold flash over Nickel

④ Tail & Mounting Style:
V = Vertical DIP Type
M = Vertical SMT Type

⑤ Insulator Material & Color:
1 = Nylon 6T, Color Black

⑥ Other Options:
00 = Standard
*See option code table
*Consult manufacturer for customized pin length



⑦ Insulator Material & Color:
0 = Without Peg
P = With Pegs

⑧ Packing Options:
0 = Without Pick & Place Pad (Tube)
P = With Pick & Place Pad (Tape & Reel)
*Code 7 and 8 for SMT Type only


CHC2 Series 1.27mm(.050") Dual Row Pin Headers

☉ Mate with CBC1 series

RoHS Compliant 





P/N CHC2***V1**-1

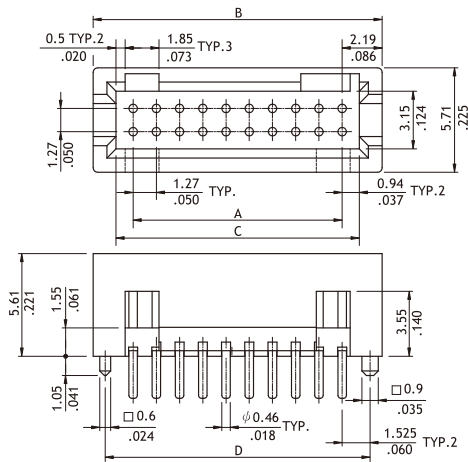


A = 1.27 X No. of Spaces
B = A + 4.38
C = A + 1.88
D = A + 3.05

Option Code	Pin Dimension	
	E	F
00	3.0(.118)	2.3(.091)

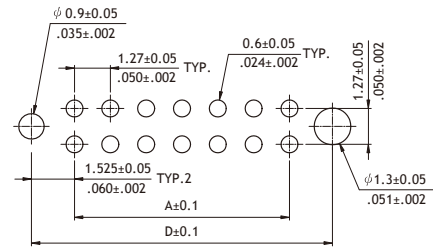



Recommended PCB Layout

P/N CHC2***V1**-2

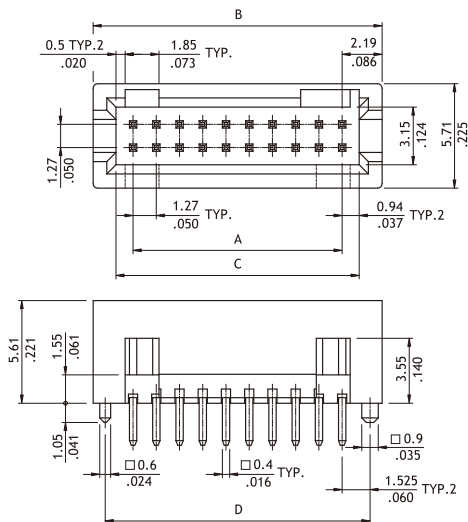

A = 1.27 X No. of Spaces
B = A + 4.38
C = A + 1.88
D = A + 3.05

Option Code	Pin Dimension	
	E	F
00	3.0(.118)	2.3(.091)

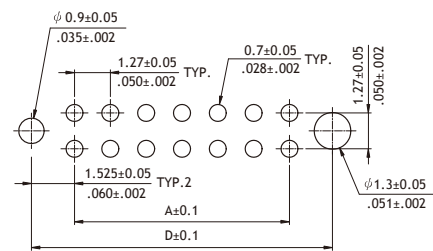

Recommended PCB Layout

Ordering Code


① CHC2 ② X1 ③ 2 ④ V ⑤ 1 ⑥ 00 - ⑦ 1

- ① Series No.
- ② No. of Circuits: 06 to 100 (X1 = 100)
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail & Mounting Style:
V = Vertical DIP Type
- ⑤ Insulator Material & Color: 1 = Nylon 6T, Color Black


- ⑥ Other Options:
00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Pin Size:
1 = 0.46mm Round Pin
2 = 0.4mm Square Pin

CHC2 Series 1.27mm(.050") Dual Row Pin Headers



☉ Mate with CBC1 series

RoHS Compliant  

P/N CHC2***H100-10

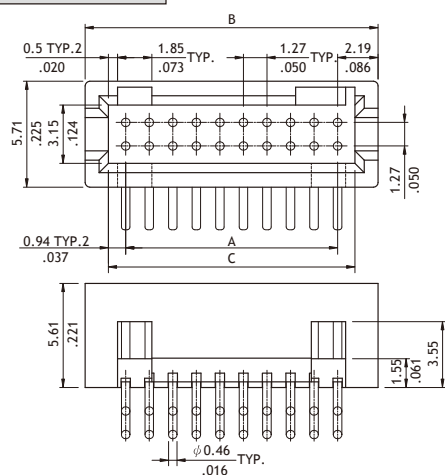


A = 1.27 X No. of Spaces
 B = A + 4.38
 C = A + 1.88





Recommended PCB Layout

P/N CHC2***H100-20

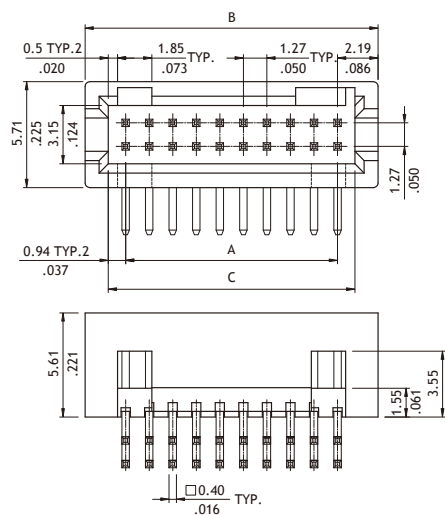

A = 1.27 X No. of Spaces
 B = A + 4.38
 C = A + 1.88



Recommended PCB Layout

Ordering Code

① CHC2 ② X1 ③ 2 ④ H ⑤ 1 ⑥ 00 - ⑦ 10




- ① Series No.
 ② No. of Circuits: 06 to 100 (X1 = 100)
 ③ Plating Code: 2 = Gold flash over Nickel
 ④ Tail & Mounting Style:
 H = Right Angle DIP Type
 ⑤ Insulator Material & Color: 1 = Nylon 6T, Color Black

- ⑥ Other Options: 00 = Standard
 *See option code table
 *Consult manufacturer for customized pin length
 ⑦ Pin Size:
 10 = 0.46mm Round Pin
 20 = 0.4mm Square Pin




RoHS Compliant



Option Code	Pin Dimension	
	C	D
00	3.9(.154)	2.8(.110)
01	6.8(.268)	3.0(.118)
02	9.0(.358)	2.0(.079)
03	8.0(.315)	3.0(.118)

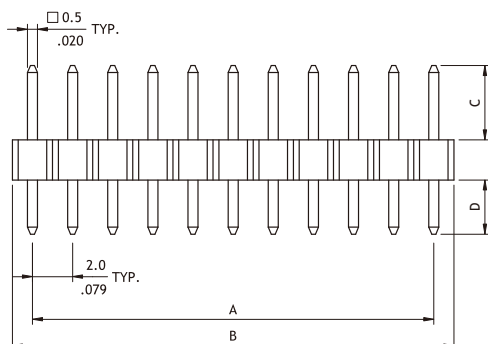

Option Code	Pin Dimension		
	C	D	E
00	3.5 (138)	2.5 (99.8)	2.25 (89.9)

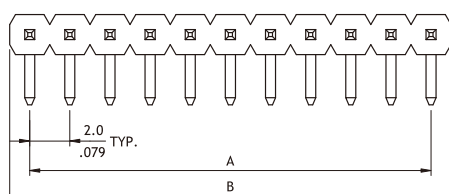

Recommended PCB Layout

① CH 1 1 ② 4 0 ③ 2 ④ V ⑤ A ⑥ 0 0 - ⑦ NH

- | | |
|--|--|
| ① Series No. | ⑥ Other Options: 00 = Standard |
| ② No. of Circuits: 02 to 40 | *See option code table |
| ③ Plating Code: 2 = Gold flash over Nickel | *Consult manufacturer for customized pin length |
| ④ Tail & Mounting Style: V = Straight DIP Type
H = Right Angle DIP Type | ⑦ Process: -NH = For Lead Free soldering process and
Halogen-Free |
| ⑤ Insulator Material & Color:
A = Nylon 6T UL 94V-0, Color Black | *Empty Code 7, if requesting non Halogen-Free material |


CH11 Series 2.00mm(.079") Single Row SMT Pin Headers

☉ Mate with CB22 series

RoHS Compliant  





P/N CH11**2M100-0*-NH

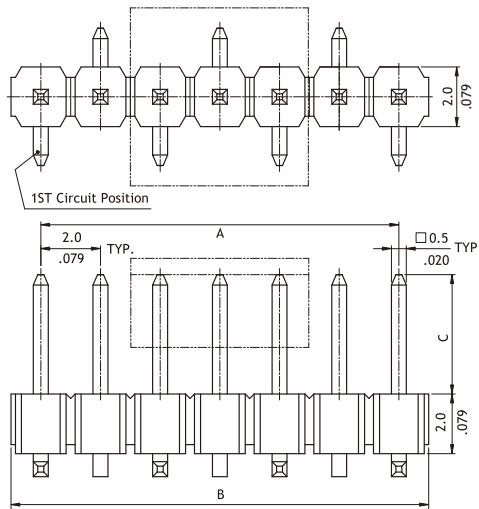


A = 2.0 x No. of Spaces
B = A + 2.0

Option Code	Pin Dimension		
	C	D	E
00	4.0(.157)	2.77(.109)	4.6(.181)
01	6.73(.265)	2.77(.109)	4.6(.181)




Recommended PCB Layout

P/N CH11**2SA01-NH

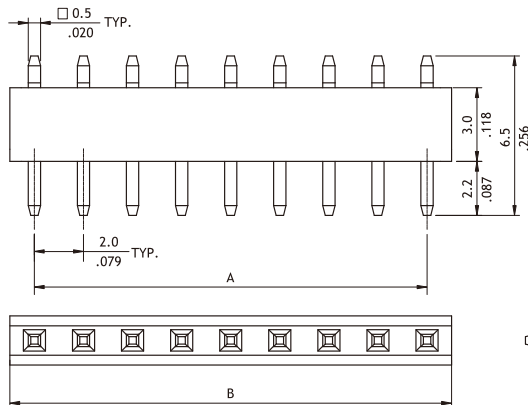

A = 2.0 x No. of Spaces
B = A + 2.0

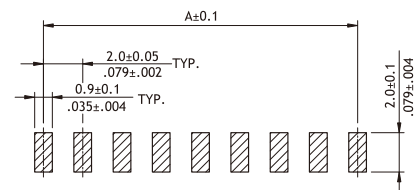

Recommended PCB Layout

Ordering Code

① CH ② 11 ③ 40 ④ 2 ⑤ M ⑥ 1 ⑦ 00 - ⑧ 00 - ⑨ NH



- ① Series No.
- ② No. of Circuits: 02 to 40
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail & Mounting Style: M = Top Entry SMT Type
S = Side Entry SMT Type
- ⑤ Insulator Material & Color:
1 = Nylon 6T, Color Black (for Top Entry)
A = LCP, Color Black (for Side Entry)

- ⑥ Other Options: 00 = Standard (for Top Entry)
01 = Standard (for Side Entry)
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Pin Size: 0 = Original design
- ⑧ Packing Options: 0 = Without Pick & Place Pad (Tube)
P = With Pick & Place Pad (Tape & Reel)
*Code 7 and 8 for Top Entry Type only
- ⑨ Process: -NH = For Lead Free IR process and Halogen-Free


CH21 Series 2.00mm(.079") Single Row Dual Bodies Pin Headers

☉ Mate with CB22 series

RoHS Compliant  




P/N CH21**2VA00-NH

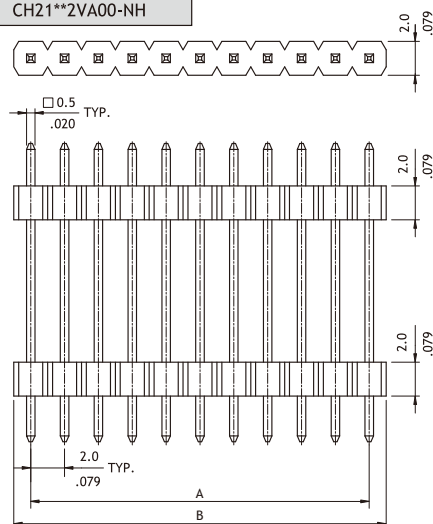


A = 2.0 x No. of Spaces
B = A + 2.0
Pin overall length 30.0mm max.

Option Code	Pin Dimension		
	C	D	E
00	4.0(.157)	2.5(.098)	11.6(.457)
01	3.55(.140)	2.55(.100)	9.55(.376)





Recommended PCB Layout

P/N CH21**2M100-0*-NH

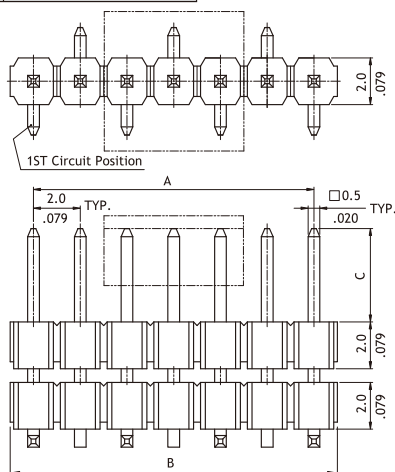

A = 2.0 x No. of Spaces
B = A + 2.0

Option Code	Pin Dimension			
	C	D	E	F
00	4.0(.157)	0.77(.030)	4.0(.157)	4.6(.181)
01	2.5(.098)	0.75(.029)	10.0(.394)	4.6(.181)



Recommended PCB Layout


Ordering Code

① CH ② 2 ③ 1 ④ 4 ⑤ 0 ⑥ 2 ⑦ V ⑧ 1 ⑨ 0 ⑩ 0 - ⑪ 0 ⑫ 0 - ⑬ NH

- ① Series No.
- ② No. of Circuits: 02 to 40
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail & Mounting Style: V = Top Entry DIP Type
M = Top Entry SMT Type
- ⑤ Insulator Material & Color:
1 = Nylon 6T, Color Black (SMT)
A = Nylon 6T, Color Black (DIP)
- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Packing Options:
00 = Without Pick & Place Pad (Tube)
0P = With Pick & Place Pad (Tape & Reel)
*Code 7 for SMT Type only
- ⑧ Process: -NH = For Lead Free soldering process and Halogen-Free

CH70 Series 2.00mm(.079") Straight SMT Dual Row Shrouded Pin Headers



☉ Mate with CA11 series Flat Cable-IDC Socket

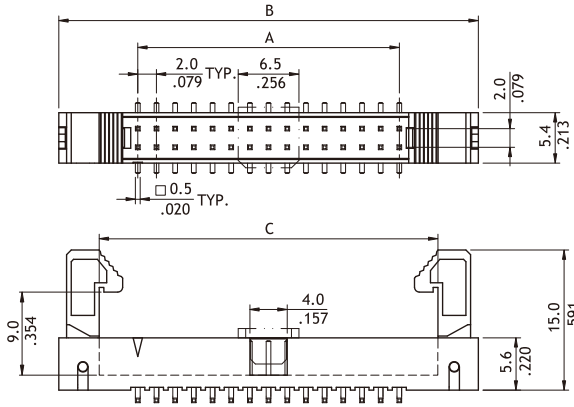RoHS Compliant 

$$A = 2.0 \times \text{No. of Spaces}$$

$$B = A + 16.9$$

$$C = A + 8.25$$

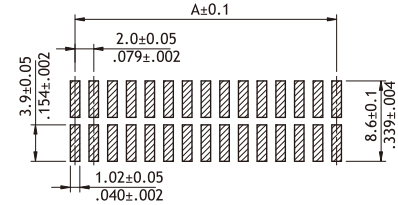

Recommended PCB Layout

Ordering Code

① ② ③ ④ ⑤ ⑥

CH70 50 D M 1 Y0


- ① Series No.
 ② No. of Circuits:
 Without Pad: 08 to 50
 With Pad: 10 to 50

- ③ Plating Code:
 D= Selective 10u" (0.25 um")
 Gold flash over Nickel
 ④ Tail Style: M = SMT Type

- ⑤ Color: 1 = Black
 ⑥ Other Options:
 Y0= Tray Packing (With Pad)
 R0= Tape & Reel (With Pad)

CH71 Series 2.00mm(.079") Dual Row SMT Pin Headers



☉ Mate with CB74,CB76 and CB78 series

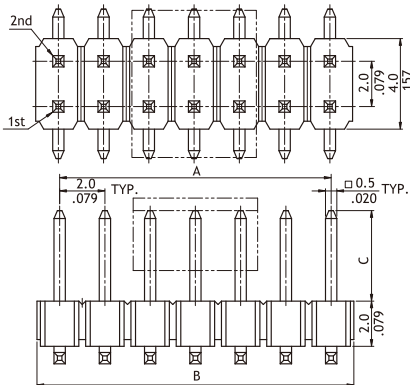RoHS Compliant  

$$A = 2.0 \times \text{No. of Spaces}$$

$$B = A + 2.0$$

Pick & Place Pad



Recommended PCB Layout



Option Code	Pin Dimension		
	C	D	F
00	4.0(.157)	2.77(.109)	6.5(.256)
01	6.0(.236)	2.77(.109)	6.5(.256)

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

CH71 80 2 M 1 00 - 00 - NH

- ① Series No.
 ② No. of Circuits: 04 to 80
 ③ Plating Code: 2 = Gold flash over Nickel
 ④ Tail & Mounting Style: M = Top Entry SMT Type
 ⑤ Insulator Material & Color:
 1 = Nylon 6T, Color Black


- ⑥ Other Options: 00 = Standard
 *See option code table
 *Consult manufacturer for customized pin length
 ⑦ Pin Size: 0 = Original design
 ⑧ Packing: 0 = Without Pick & Place Pad (Tube)
 P = With Pick & Place Pad (Tape & Reel)
 *Code 7 and 8 for Top Entry Type only
 ⑨ Process: -NH = For Lead Free IR process and Halogen-Free

CH71 Series 2.00mm(.079") Dual Row Pin Headers

- With standoff prevent flux wicking
- Mate with CB74, CB76 and CB78 series



RoHS Compliant  

P/N CH71**2VA00-NH

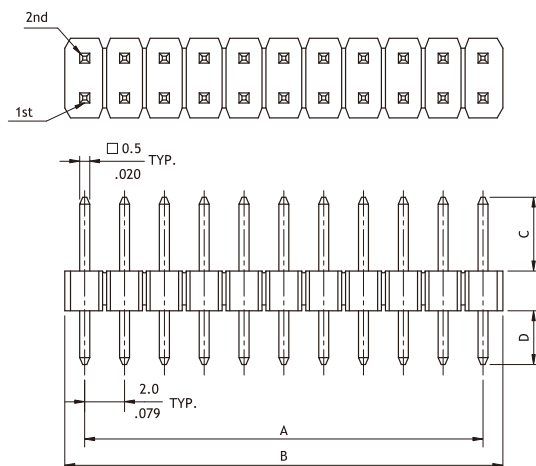


A = 2.0 x No. of Spaces
B = A + 2.0
Pin overall length 30.0mm max.

Option Code	Pin Dimension	
	C	D
00	3.9(.154)	2.8(.110)
01	6.8(.268)	3.0(.118)





Recommended PCB Layout

P/N CH71**2HA00-NH

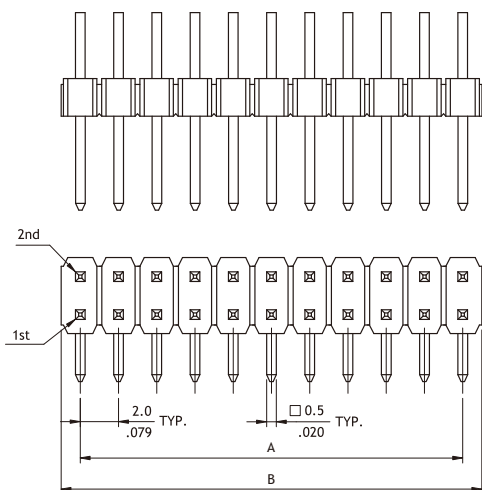

A = 2.0 x No. of Spaces
B = A + 2.0

Option Code	Pin Dimension		
	C	D	E
00	3.9(.154)	2.8(.110)	1.1(.043)
02	2.9(.114)	2.8(.110)	1.1(.043)



Recommended PCB Layout

Ordering Code

① CH ② 7 ③ 1 ④ 8 ⑤ 0 ⑥ 2 ⑦ V ⑧ A ⑨ 0 ⑩ 0 ⑪ - ⑫ NH

- ① Series No.
- ② No. of Circuits: 02 to 80
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail: V = Straight DIP Type
H = Right Angle DIP Type
- ⑤ Insulator Material & Color:
A = Nylon 6T, Color Black
- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Process: -NH = For Lead Free soldering process and Halogen-Free


CH72 Series 2.00mm(.079") Dual Row Pin Headers

☉ Mate with CB74, CB78 series


RoHS Compliant




P/N CH72**2V100

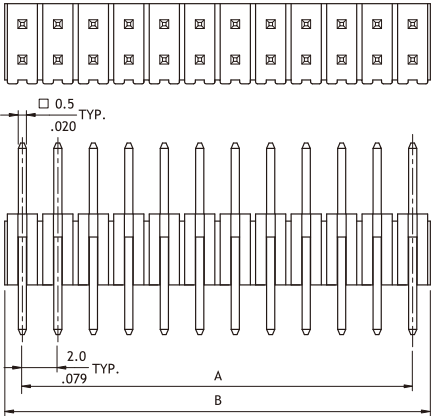

$A = 2.0 \times \text{No. of Spaces}$
 $B = A + 2.0$




Option Code	Pin Dimension	
	C	D
00	4.0(.157)	2.8(.110)




Recommended PCB Layout


P/N CH72**2H100

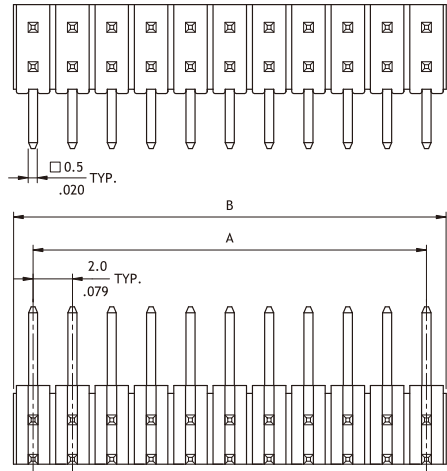

$A = 2.0 \times \text{No. of Spaces}$
 $B = A + 2.00$



Option Code	Pin Dimension	
	C	D
00	4.0(.157)	2.8(.110)



Recommended PCB Layout

Ordering Code

① CH ② 7 ③ 2 ④ V ⑤ 1 ⑥ 00

- ① Series No.
- ② No. of Circuits: 08 to 50
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail: V = Straight DIP Type
H = Right Angle DIP Type
- ⑤ Color: 1 = Black
- ⑥ Other Options:
00 = Standard
*See option code table



CH74 Series 2.00mm(.079") Dual Row Box Headers

◎ Mate with CA11 series

RoHS Compliant




P/N CH74**2V100

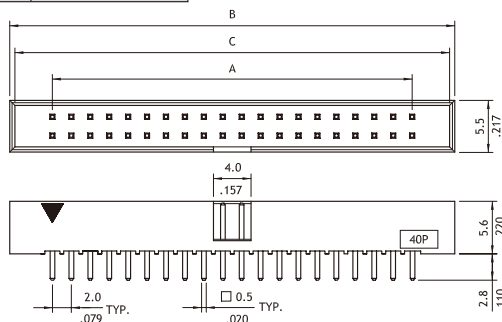



Recommended PCB Layout

P/N CH74**2H100

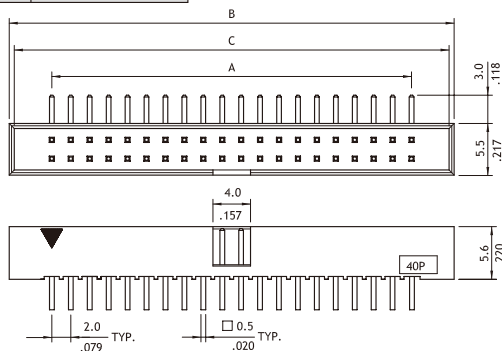

Circuits	Dimension		
	A	B	C
6	4.0(.157)	13.2(.520)	12.1(.476)
8	6.0(.236)	15.2(.598)	14.1(.555)
10	8.0(.315)	17.2(.677)	16.1(.634)
12	10.0(.394)	19.2(.756)	18.1(.713)
14	12.0(.472)	21.2(.835)	20.1(.791)
16	14.0(.551)	23.2(.913)	22.1(.870)
18	16.0(.630)	25.2(.992)	24.1(.949)
20	18.0(.709)	27.2(1.071)	26.1(1.028)
22	20.0(.787)	29.2(1.150)	28.1(1.106)
24	22.0(.866)	31.2(1.228)	30.1(1.185)
26	24.0(.945)	33.2(1.307)	32.1(1.264)
28	26.0(1.024)	35.2(1.386)	34.1(1.343)
30	28.0(1.102)	37.2(1.465)	36.1(1.421)
32	30.0(1.181)	39.2(1.543)	38.1(1.500)
34	32.0(1.260)	41.2(1.622)	40.1(1.579)
36	34.0(1.339)	43.2(1.701)	42.1(1.657)
40	38.0(1.496)	47.2(1.858)	46.1(1.815)
44	42.0(1.654)	51.2(2.016)	50.1(1.972)
50	48.0(1.890)	57.2(2.252)	56.1(2.209)
60	58.0(2.283)	67.2(2.646)	66.1(2.602)
64	62.0(2.441)	71.2(2.803)	70.1(2.760)
68	66.0(2.598)	75.2(2.961)	74.1(2.917)

P/N CH74**2M100

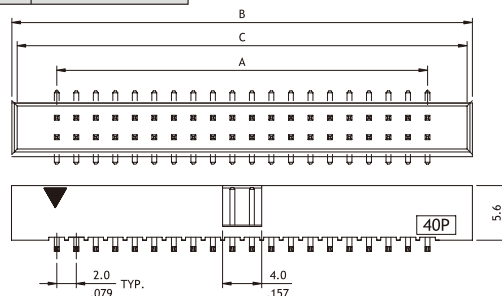

Recommended PCB Layout

Ordering Code

① CH 7 4 ② 6 8 ③ 2 ④ V ⑤ 1 ⑥ 0 0

- ① Series No.
 ② No. of Circuits: 06 to 68
 ③ Plating Code:
 2 = Gold flash over Nickel


- ④ Tail: V = Straight DIP Type
 H = Right Angle DIP Type
 M = SMT Type

- ⑤ Color: 1 = Black
 ⑥ Other Options:
 00 = Standard
 *See option code table


CH75 Series 2.00mm(.079") Dual Row Dual Bodies Pin Headers

☉ Mate with CB74 and CB78 series


RoHS Compliant  




A = 2.0 x No. of Spaces
B = A + 2.0
Pin overall length 30.0 max.

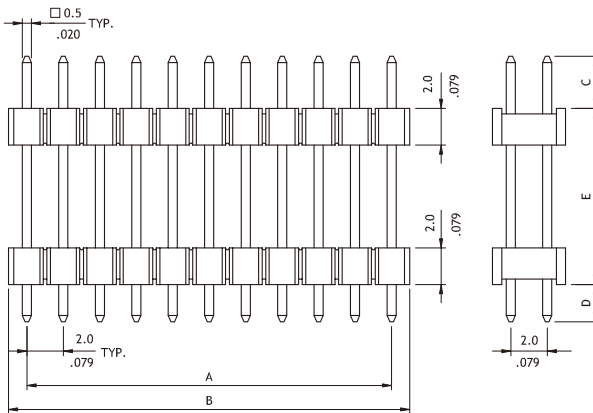


Option Code	Pin Dimension		
	C	D	E
00	4.0(.157)	2.50(.098)	11.60(.457)
01	3.55(.140)	2.55(.100)	9.55(.376)
02	4.0(.157)	2.50(.098)	9.30(.366)




Recommended PCB Layout

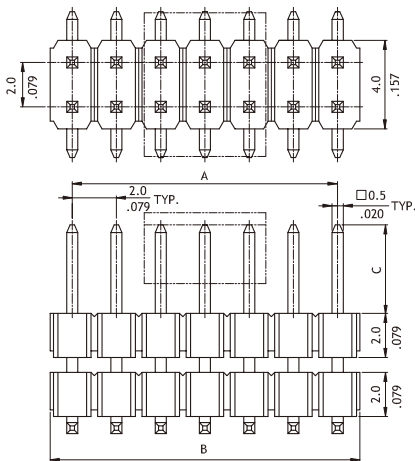

A = 2.0 x No. of Spaces
B = A + 2.0



Option Code	Pin Dimension			
	C	D	E	F
00	4.0(.157)	0.77(.030)	4.00(.157)	6.50(.256)
01	4.0(.157)	0.77(.030)	11.00(.433)	6.50(.256)
02	4.0(.157)	0.77(.030)	8.00(.315)	6.50(.256)



Recommended PCB Layout

Ordering Code

① CH ② 75 ③ 80 ④ 2 ⑤ M ⑥ 1 ⑦ 00 ⑧ - ⑨ 00 - ⑩ NH


- ① Series No.
- ② No. of Circuits: 04 to 80
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail & Mounting Style: V = Straight DIP Type
M = Straight SMT Type
- ⑤ Insulator Color:
1 = Nylon 6T, Color Black (SMT)
A = Nylon 6T, Color Black (DIP)

- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Packing Options:
00 = Without Pick & Place Pad (Tube)
0P = With Pick & Place Pad (Tape & Reel)
*Code 7 for SMT Type only
- ⑧ Process: -NH = For Lead Free soldering process and Halogen-Free


CH34 Series 2.54mm(.100") Single Row Dual Bodies Pin Headers

◎ Mate with CB33, CB37 and CB39 series

RoHS Compliant




P/N CH34**2VA00-NH

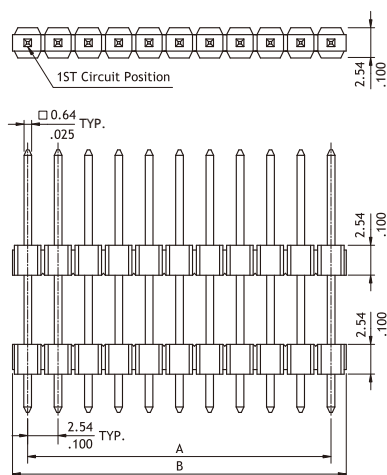


A = 2.54 x No. of Spaces
B = A + 2.36
Pin overall length 30.0mm max.

Option Code	Pin Dimension		
	C	D	E
00	10.30(.406)	3.20(.126)	12.00(.472)
01	3.15(.124)	3.15(.124)	9.00(.354)
02	3.40(.134)	3.00(.118)	9.60(.378)
03	7.00(.276)	3.00(.118)	18.00(.709)
04	3.00(.118)	3.00(.118)	6.00(.236)





Recommended PCB Layout

P/N CH34**2M100-**-NH

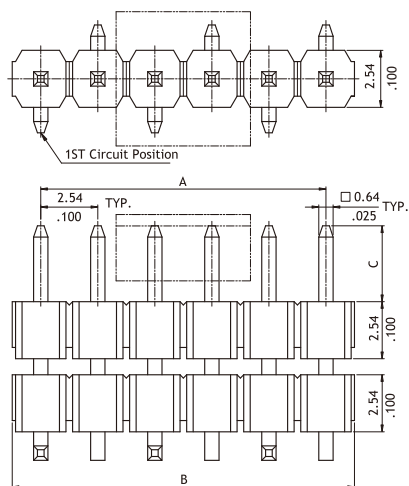

A = 2.54 x No. of Spaces
B = A + 2.36

Option Code	Pin Dimension			
	C	D	E	F
00	6.0(.236)	1.27(.050)	5.08(.200)	4.8(.189)

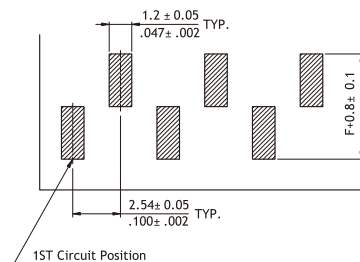

Recommended PCB Layout

Ordering Code

① CH ② 3 ③ 4 ④ 4 ⑤ 0 ⑥ 2 ⑦ M ⑧ 1 ⑨ 0 ⑩ 0 - ⑪ 0 ⑫ 0 - ⑬ NH

- ① Series No.
- ② No. of Circuits: 02 to 40
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail & Mounting Style: V = Straight DIP Type
M = Straight SMT Type
- ⑤ Insulator Color:
1 = Nylon 6T, Color Black (SMT)
A = Nylon 6T, Color Black (DIP)

- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Packing Options:
00 = Without Pick & Place Pad (Tube)
0P = With Pick & Place Pad (Tape & Reel)
*Code 7 for SMT Type only
- ⑧ Process: -NH = For Lead Free soldering process and Halogen-Free

CH31 Series 2.54mm(.100") Single Row Pin Headers

☉ Mate with CB33 , CB37 and CB39 series

RoHS Compliant






P/N CH31**2VA00-NH




A = 2.54 x No. of Spaces
B = A + 2.36
Pin overall length 30.0mm max.

Option Code	Pin Dimension	
	C	D
00	6.0(.236)	3.0(.118)
01	6.26(.246)	3.0(.118)
02	5.86(.231)	3.0(.118)
03	8.86(.349)	3.0(.118)

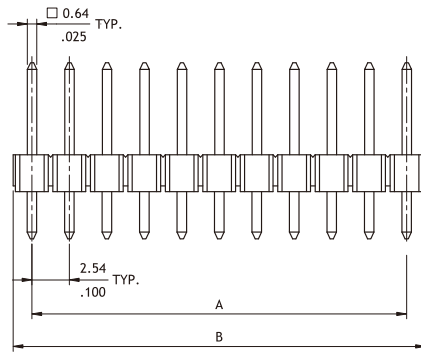




Recommended PCB Layout

P/N CH31**2HA00-NH



A = 2.54 x No. of Spaces
B = A + 2.36

Option Code	Pin Dimension		
	C	D	E
00	6.00(.236)	3.0(.118)	1.5(.059)
01	6.26(.246)	3.0(.118)	1.5(.059)
02	5.86(.231)	3.0(.118)	1.5(.059)
03	8.30(.327)	3.0(.118)	1.5(.059)
04	7.26(.286)	3.0(.118)	1.5(.059)



Recommended PCB Layout

Ordering Code

① CH ② 3 ③ 1 ④ 4 ⑤ 0 ⑥ 2 ⑦ V ⑧ A ⑨ 0 ⑩ 0 - ⑪ NH

① Series No.

② No. of Circuits: 01 to 40

③ Plating Code:

2 = Gold flash over Nickel

④ Tail & Mounting Style:

V = Straight DIP Type

H = Right Angle DIP Type

⑤ Insulator Material & Color:

A = Nylon 6T UL 94V-0, Color Black

⑥ Other Options: 00 = Standard

*See option code table


*Consult manufacturer for customized pin length

⑦ Process: -NH = For Lead Free soldering process and Halogen-Free


CH31 Series 2.54mm(.100") Single Row SMT Pin Headers

☉ Mate with CB33, CB37 and CB39 series


RoHS Compliant  



$A = 2.54 \times \text{No. of Spaces}$
 $B = A + 2.36$



Option Code	Pin Dimension		
	C	D	E
00	6.0(.236)	3.81(.150)	4.8(.189)
01	3.5(.138)	7.80(.307)	4.8(.189)



Ordering Code

① CH 31 ② 40 ③ 2 ④ M ⑤ 1 ⑥ 00 - ⑦ 00 - ⑧ NH

① Series No.

② No. of Circuits: 02 to 40

③ Plating Code: 2 = Gold flash over Nickel

④ Tail Style: M = SMT Type

⑤ Insulator Material & Color:
 1 = Nylon 6T, Color Black

⑥ Other Options: 00 = Standard

*See option consult manufacturer

*Consult manufacturer for customized pin length


⑦ Packing Options: 00 = Without Pick & Place Pad(Tube)

OP = With Pick & Pick Place Pad(Tape & Reel)


⑧ Process: -NH = For Lead Free soldering process and Halogen-Free

CH81 Series 2.54mm(.100") Dual Row SMT Pin Headers


☉ Mate with CB33, CB37 and CB39 series

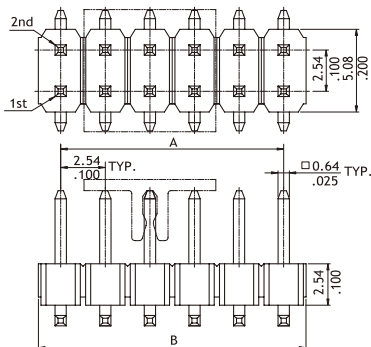

$A = 2.54 \times \text{No. of Spaces}$
 $B = A + 2.36$



Option Code	Pin Dimension		
	C	D	E
00	8.80(.346)	3.4(.134)	7.4(.291)
01	6.0(.236)	3.4(.134)	7.4(.291)
02	6.0(.236)	3.81(.150)	7.4(.291)



Ordering Code

① CH 81 ② 80 ③ 2 ④ M ⑤ 1 ⑥ 00 - ⑦ 00 - ⑧ NH

① Series No.

② No. of Circuits: 04 to 80

③ Plating Code: 2 = Gold flash over Nickel

④ Tail Style: M= Straight SMT Type

⑤ Insulator Material & Color:
 1 = Nylon 6T, Color Black

⑥ Other Options: 00 = Standard

*See option code table

*Consult manufacturer for customized pin length

⑦ Packing Options: 00 = Without Pick & Place Pad (Tube)


OP = With Pick & Place Pad (Tape & Reel)

⑧ Process: -NH = For Lead Free soldering process and Halogen-Free


CH81 Series 2.54mm(.100") Dual Row DIP Pin Headers

☉ Mate with CB83, CB85, CB87, CB91, CB96 and CB97 series


RoHS Compliant   




P/N CH81**2VA00-NH

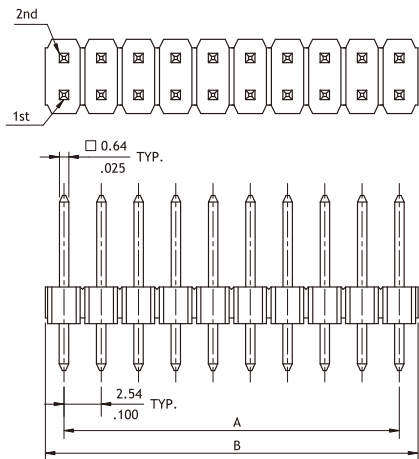

A = 2.54 x No. of Spaces
B = A + 2.36
Pin overall length 30.0mm max.




Option Code	Pin Dimension	
	C	D
00	6.00(.236)	3.00(.118)
01	6.26(.246)	3.00(.118)
02	3.50(.138)	3.50(.138)
03	4.20(.165)	4.20(.165)
04	15.50(.610)	3.00(.118)




Recommended PCB Layout


P/N CH81**2HA00-NH

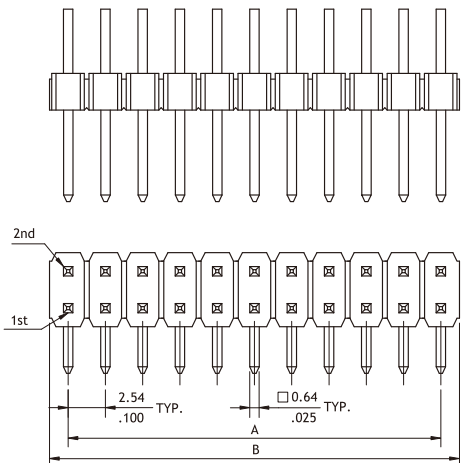

A = 2.54 x No. of Spaces
B = A + 2.36



Option Code	Pin Dimension		
	C	D	E
00	6.00(.236)	3.00(.118)	1.50(.059)
01	6.26(.246)	3.00(.118)	1.50(.059)
02	3.50(.138)	3.50(.138)	1.50(.059)
03	3.00(.118)	3.00(.118)	1.50(.059)
04	3.40(.134)	2.80(.110)	1.50(.059)



Recommended PCB Layout

Ordering Code


① CH ② 8 ③ 1 ④ 8 ⑤ 0 ⑥ 2 ⑦ V ⑧ A ⑨ 0 ⑩ 0 ⑪ - ⑫ NH

- ① Series No.
- ② No. of Circuits: 04 to 80
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail: V = Straight DIP Type
H = Right Angle DIP Type
- ⑤ Insulator Material & Color:
A = Nylon 6T UL 94V-0, Color Black
- ⑥ Other Options: 00 = Standard
*See option code table
*Consult manufacturer for customized pin length
- ⑦ Process: -NH = For Lead Free soldering process and Halogen-Free

CH87 Series 2.54mm(.100") Box Headers

- With polarizing slot
- Mate with CB94,CA21 series

RoHS Compliant

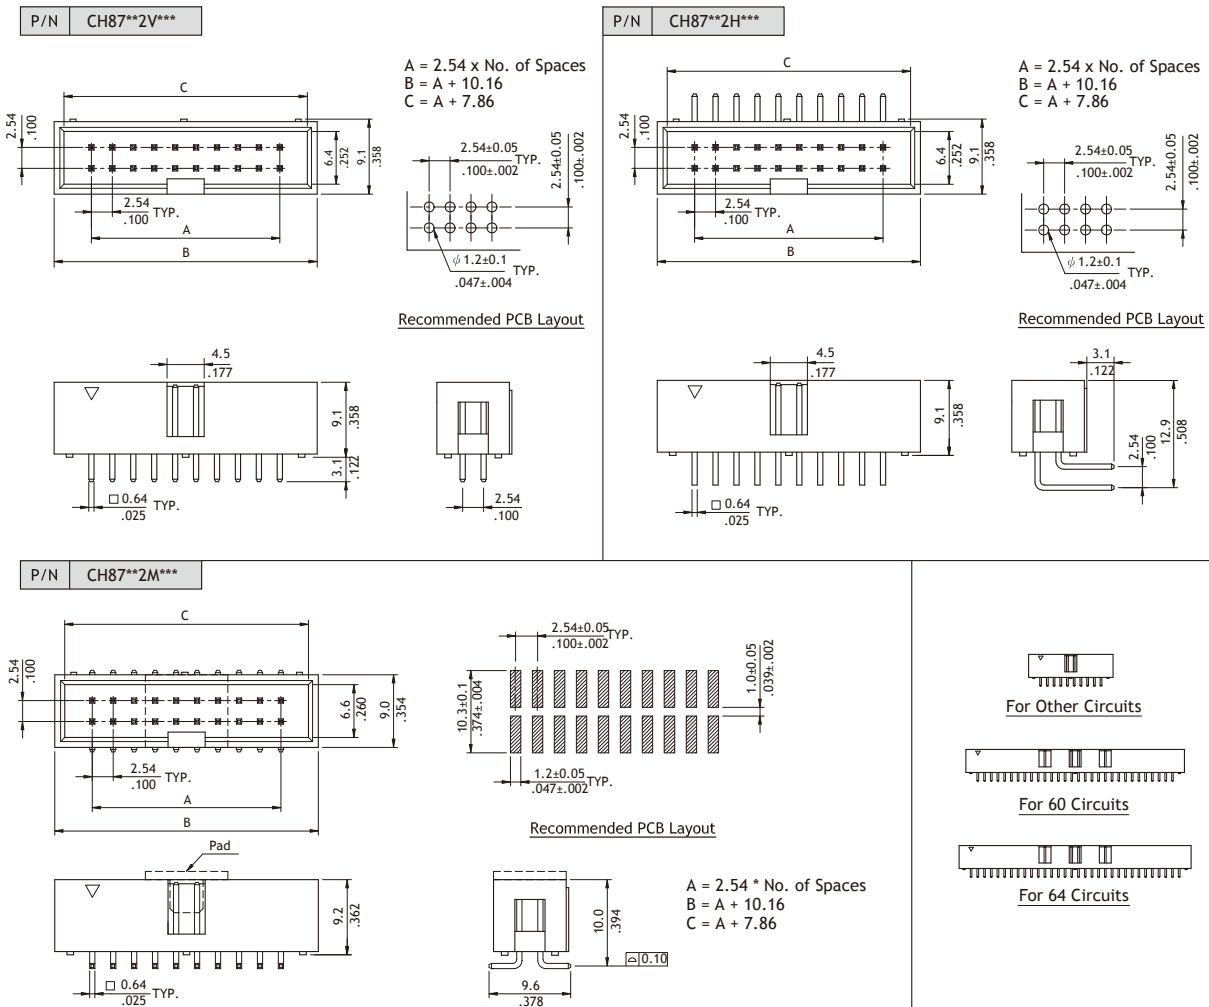

Ordering Code

① ② ③ ④ ⑤ ⑥


CH87 64 2 V 1 00

- ① Series No.
- ② No. of Circuits:
(Available: 06,08,10,12,14,16,
20,24,26,30,34,44,
50, 60,64)
*Circuits not found above
please consult manufacturer
- ③ Plating Code:
2 = Gold flash over Nickel
- ④ Tail & Mounting Style:
V = Straight DIP Type
H = Right Angle DIP Type
M = Straight SMT Type
- ⑤ Insulator Material & Color:
1 = Nylon 6T, Color Black (SMT)
A = Nylon 6T, Color Black (DIP)
- ⑥ Other Options:
00 = Standard (DIP)
00 = Without Pad (SMT)
P0 = With Pad (SMT)
*Special options consult manufacturer



CH88 Series 2.54mm(.100") Shrouded Box Headers

- Shrouded header with eject latch
- Mate with CA21 series



RoHS Compliant



Straight


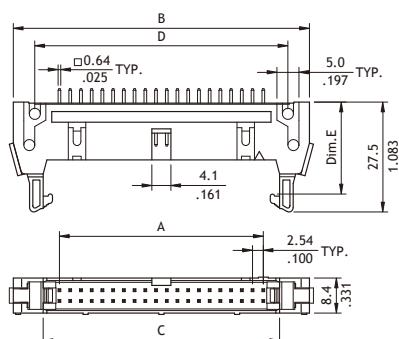


	Long	Short
DIM.E	22.0(.866)	18.4(.724)




Circuits	Dimension			
	A	B	C	D
10	10.16(.400)	31.87(1.255)	17.90(.705)	21.70(.854)
14	15.24(.600)	36.95(1.454)	22.95(.903)	26.88(1.058)
16	17.78(.700)	39.48(1.554)	25.50(1.004)	29.27(1.152)
20	22.86(.900)	44.62(1.757)	30.58(1.204)	34.50(1.358)
24	27.94(1.100)	49.67(1.956)	35.70(1.406)	39.50(1.555)
26	30.48(1.200)	52.23(2.056)	38.25(1.506)	42.05(1.656)
30	35.56(1.400)	57.30(2.256)	43.35(1.707)	47.20(1.858)
34	40.64(1.600)	62.38(2.456)	48.40(1.906)	52.15(2.053)
40	48.26(1.900)	69.95(2.754)	56.05(2.207)	59.90(2.358)
44	53.34(2.100)	75.08(2.956)	61.11(2.406)	64.77(2.550)
50	60.96(2.400)	82.70(3.255)	68.70(2.705)	72.55(2.856)
60	73.66(2.900)	95.45(3.758)	81.50(3.209)	85.25(3.356)
64	78.74(3.100)	100.60(3.960)	86.40(3.402)	90.35(3.557)

Right Angle

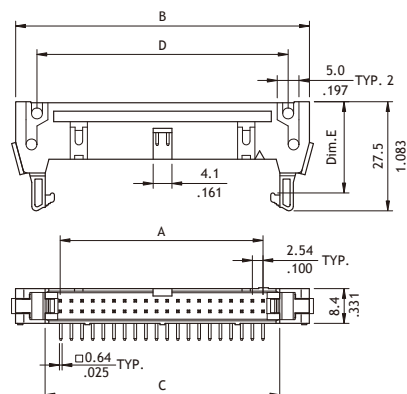

	Long	Short
DIM.E	22.0(.866)	18.4(.724)



Recommended PCB Layout

Ordering Code

① CH 88 ② 6 4 ③ 2 ④ A ⑤ 1 ⑥ 0 0

- ① Series No.
- ② No. of Circuits: see above table
please consult manufacturer
- ③ Plating Code: 2 = Gold flash over Nickel
- ④ Tail & Mounting Style:
A = With Long Latch / Straight (DIM.E = 22.0)
B = With Long Latch / Right Angle (DIM.E = 22.0)
C = With Short Latch / Straight (DIM.E = 18.4)
D = With Short Latch / Right Angle (DIM.E = 18.4)
- ⑤ Insulator Material & Color:
1 = Black
- ⑥ Other Options:
00 = Standard
*Special options consult manufacturer