

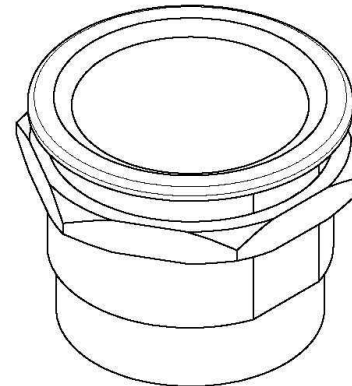


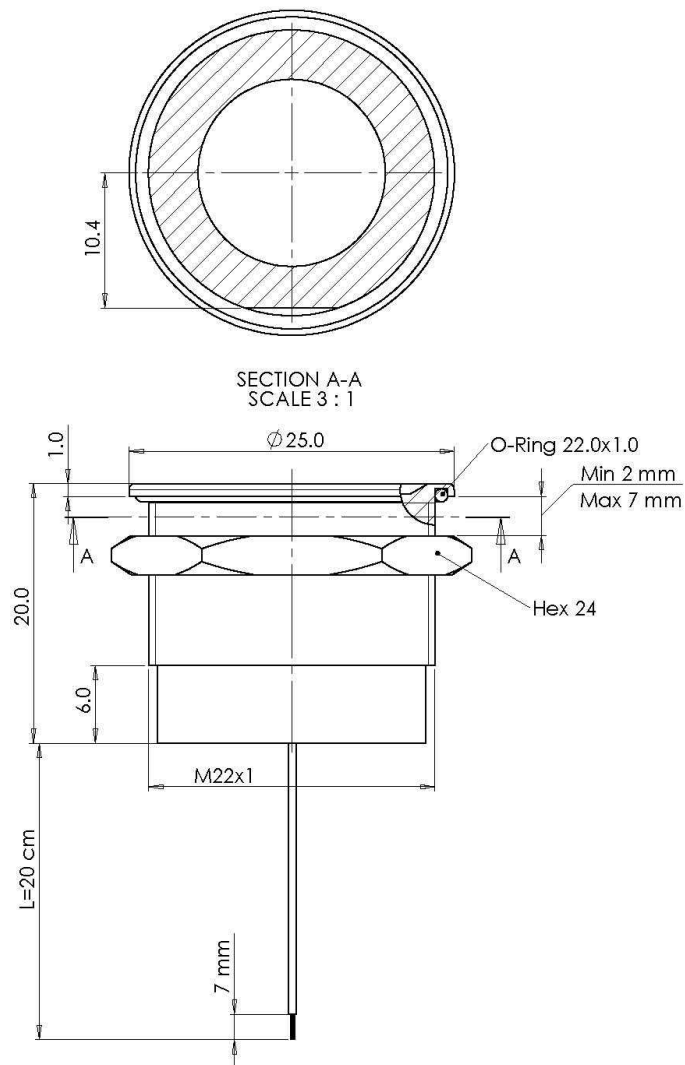

Manufactured by Stern Engineering
P/N 07225203
-Rated voltage 0-24 V AC/DC
-Switch current 1A
-Switch pulse time up to: 300msec



manufactured on: Date CE RoHS

- NOTES:**
1. Material: AISI 303
 2. Rated Voltage: (0-24 V AC/DC)
Rated Current: max 1A
Switch Resistance "On": (<1 Ohm)
Switch Resistance "Off": (> 5 Megaohms)
Switch Capacitance: (100pF)
Impulse Time: 300 mSEC
Actuation Force Typically: (3-5 N)
Climate data: -40C to +85C per MIL STD 810G
Operating cycle: (>10 million)
 3. IP protection: IP68 per IEC 60529; IP69K per DIN 40050-9
 4. Mechanical shock: 75g per MIL STD 810G
 5. Vibration: 5-500Hz/9.4m/s² per IEC 60721
 6. Potting: Epoxy Resin Silicone Free

All Dimensions in: mm		Code:		TOLERANCES UNLESS OTHERWISE SPECIFIED		Scale	Weight
				THIS DRAWING IS VALID AND NOT VALID FOR ANY OTHER USES EXCEPT AS SPECIFIED HEREIN. NO PARTS OR MATERIALS SHALL BE USED IN THE CONSTRUCTION OF ANY OTHER PARTS WITHOUT THE APPROVAL OF THE DESIGNER.		Material	
				X: ± 0.1 K: ± 0.2 ANG: ± 1.5%		Description	
				Name Date		BPSSN22PNRK1	
				Engineer			
				Draftsman			
				Checked			
				Approval			
1	13198	Update after lab tests		Sasha	26.05.13	Cat no: 07225203	
No	ECO	Description		Name	Date	Revision	
		Finish		IBS ELECTRONICS		Drawing no: P25-06.00.00	
						01	
						Sheet 1 of 1	
						A3	