

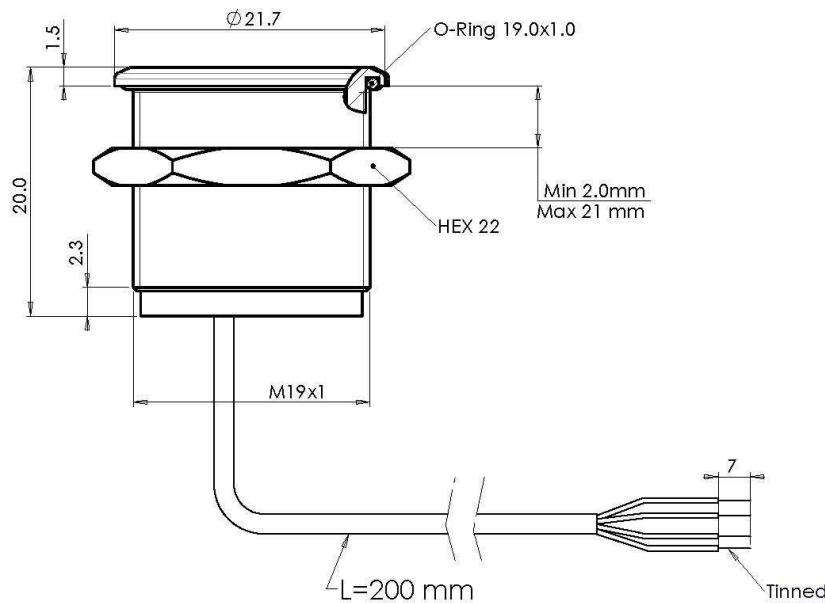





Manufactured by Stern Engineering
P/N 07225226
-Power supply 0-24V AC/DC
-Switch voltage 0-24V AC peak/DC
-Switch current Max 1A
-Red illuminated 24V AC/DC

Red LED



manufactured on: Date CE RoHS

NOTES:

1. Material: AISI 303
2. Rated Voltage: (0-24 V AC/DC)
Rated Current: max 1A
Switch Resistance "On": (<1 Ohms)
Switch Resistance "Off": (> 5 Megaohms)
Switch Capacitance : (100pF)
Overvoltage protection 34 V DC
Impulse Time : 300 mSEC
Actuation Force Typically : (3-5 N)
Climate data: -40C to +85C per MIL STD 810G
Operating cycle : (>10 million)
3. Red illuminated 24V AC/DC
4. IP protection: IP68 per IEC 60529; IP69K per DIN 40050-9
5. Mechanical shock : 75g per MIL STD 810G
6. Vibration: 5-500Hz/9.4m/s² per IEC 60721
7. Potting: Epoxy Resin Silicone Free

All Dimensions in: mm		Code:		TOLERANCES UNLESS OTHERWISE SPECIFIED		Scale 2:1	Weight
				THIS DRAWING IS VALID ONLY IF THE PART IS IDENTICAL TO THE PART SHOWN ON THE DRAWING. ANY CHANGES TO THE PART MUST BE APPROVED BY THE ENGINEER. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.		Material	
				TOLERANCES UNLESS OTHERWISE SPECIFIED		Description	
				XX ± 0.1		BPSSN19PRFG0	
				X ± 0.2		Cat.no	
				X ± 0.5		07225226	
				ANG ± 15%		Revision	
						00	
						Drawing no.	
						P95-00.00.00/2	
						Sheet 1 of 1	
						A3	