


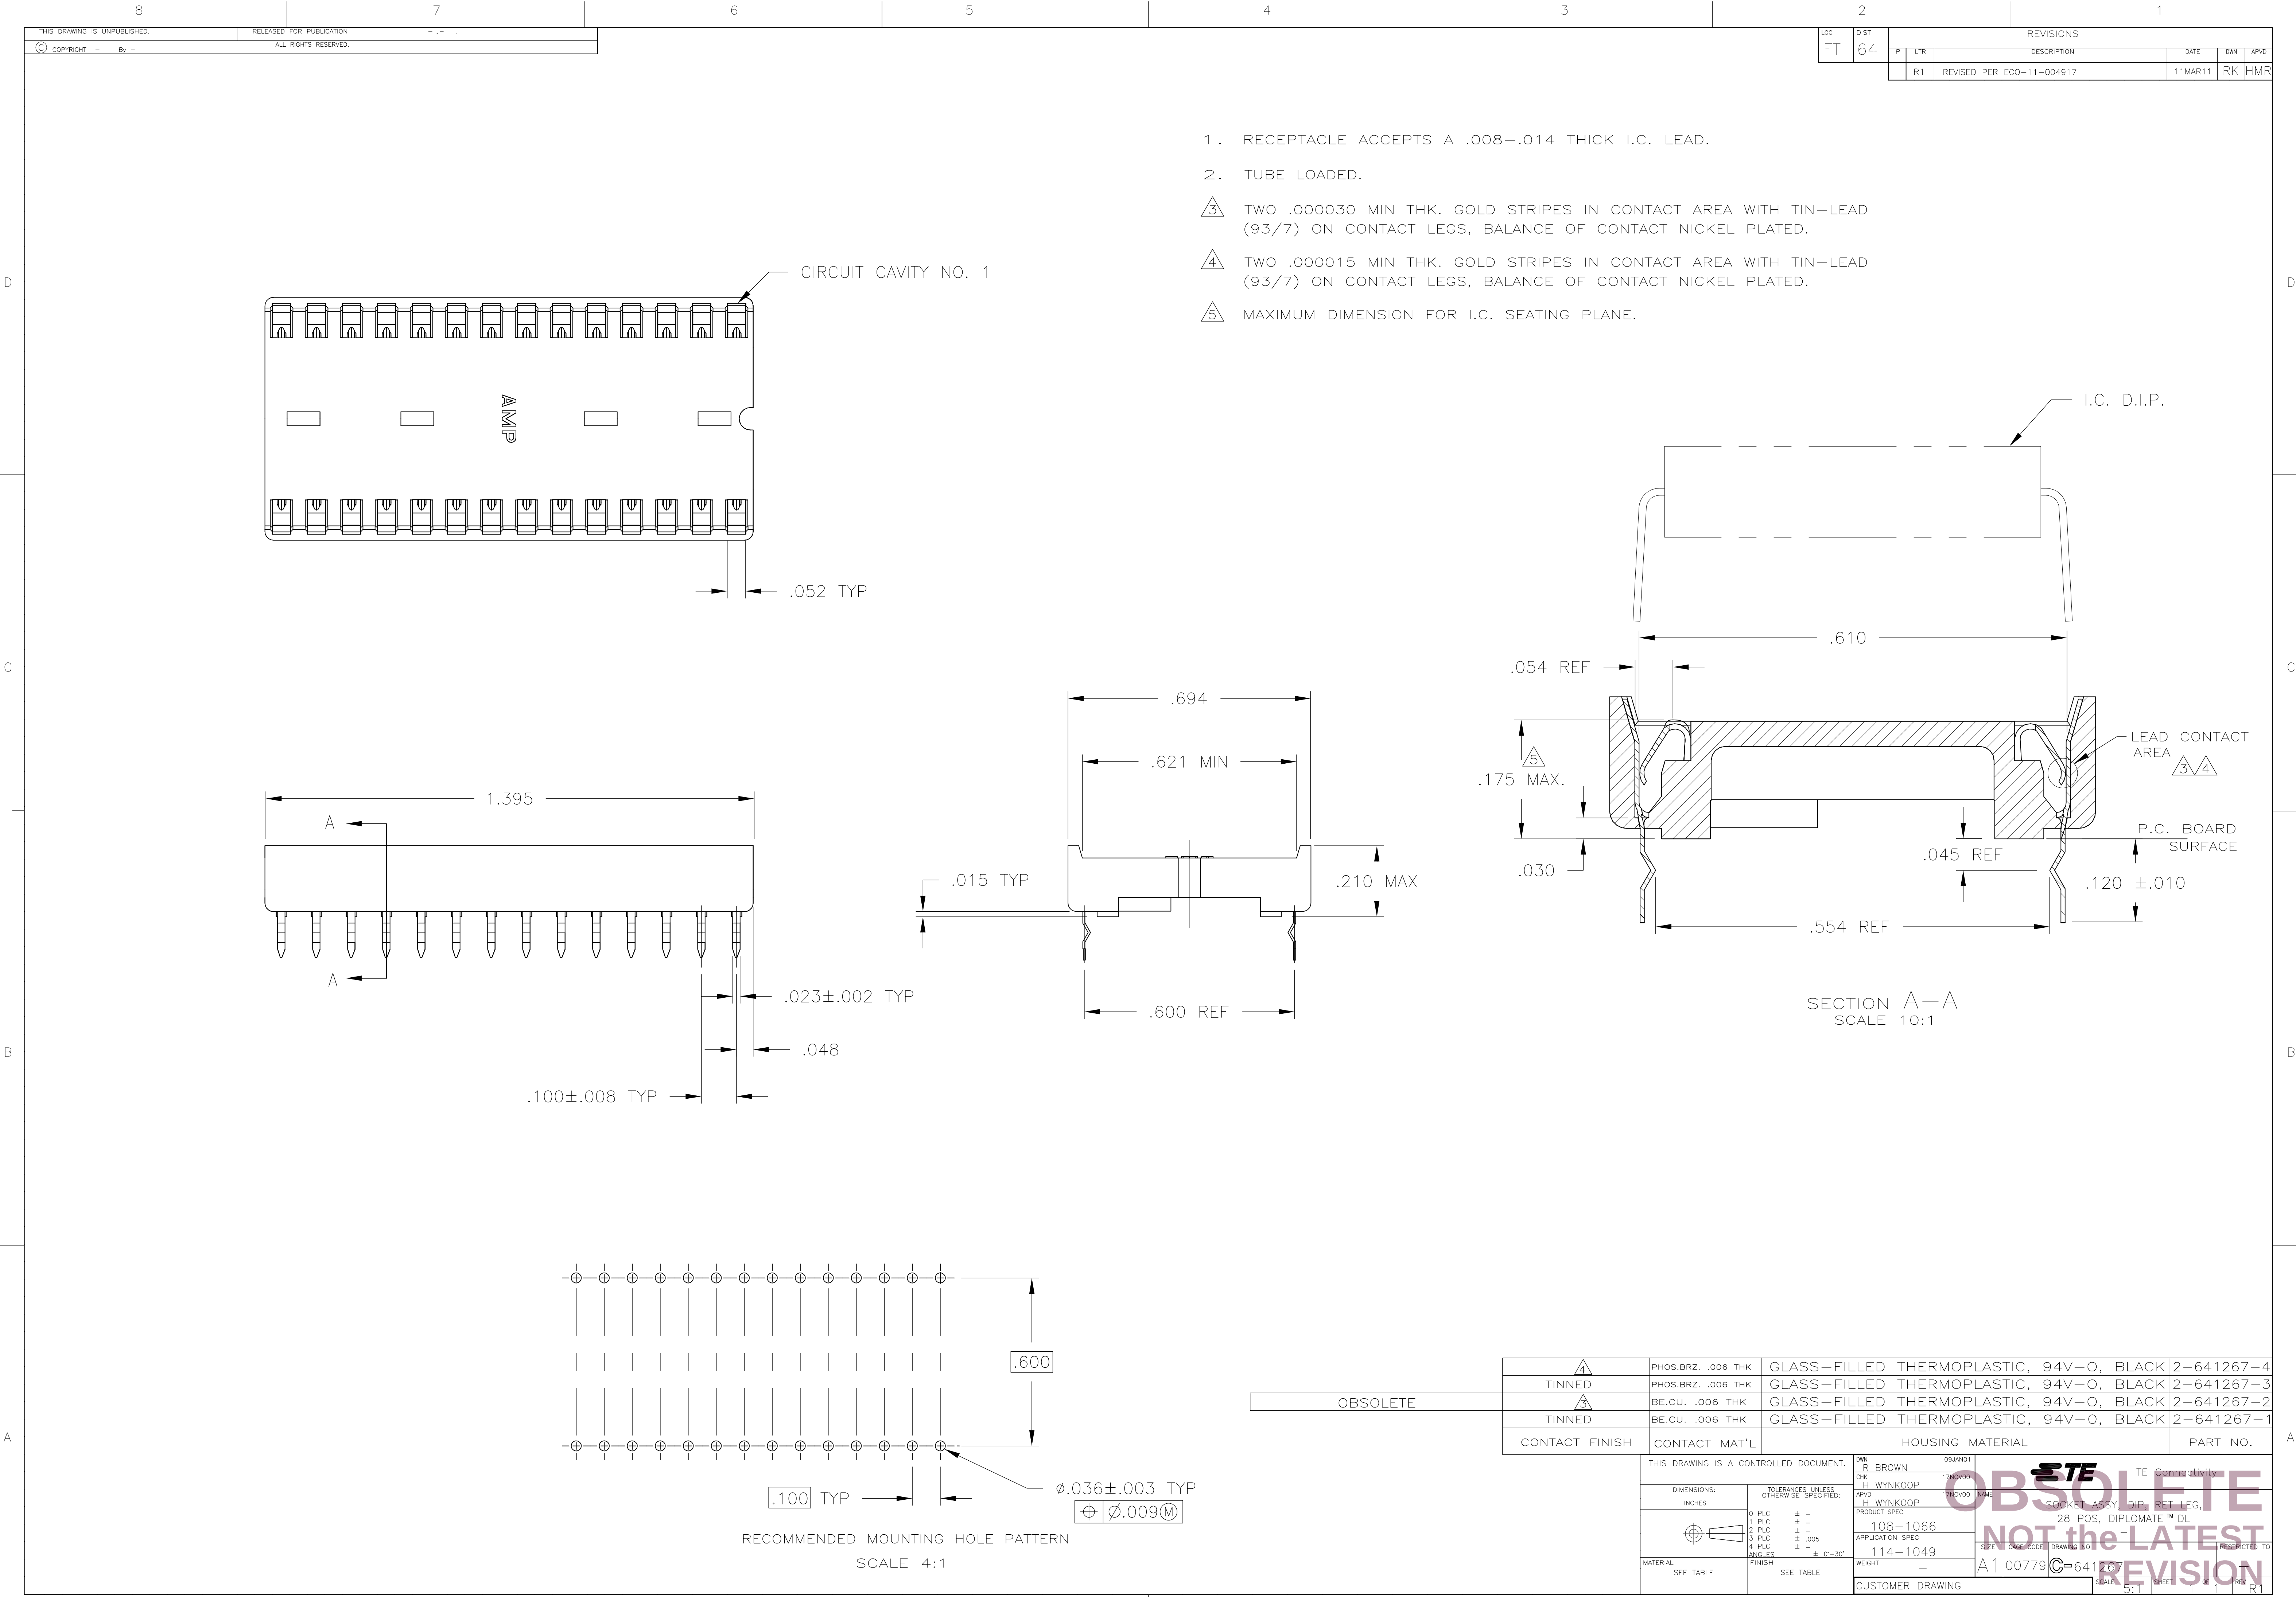

1. RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.

2. TUBE LOADED.

3. TWO .000030 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN-LEAD (93/7) ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.

4. TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN-LEAD (93/7) ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.

5. MAXIMUM DIMENSION FOR I.C. SEATING PLANE.

OBSOLETE	4	PHOS.BRZ. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-641267-4
	TINNED	PHOS.BRZ. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-641267-3
	4	BE.CU. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-641267-2
	TINNED	BE.CU. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-641267-1
CONTACT FINISH		CONTACT MAT'L		HOUSING MATERIAL
CONTACT FINISH		CONTACT MAT'L		PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 09JAN01	STE TE Connectivity	
DIMENSIONS: INCHES		CHK H WYNKOOP 17NOV00	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H WYNKOOP 17NOV00	PRODUCT SPEC	
0 PLC ± .005		108-1066		APPLICATION SPEC
1 PLC ± .005		114-1049		WEIGHT
2 PLC ± .005		A1 00779		CUSTOMER DRAWING
3 PLC ± .005		SCALE 5:1		SHEET 1 OF 1
4 PLC ± .005		REV R1		