
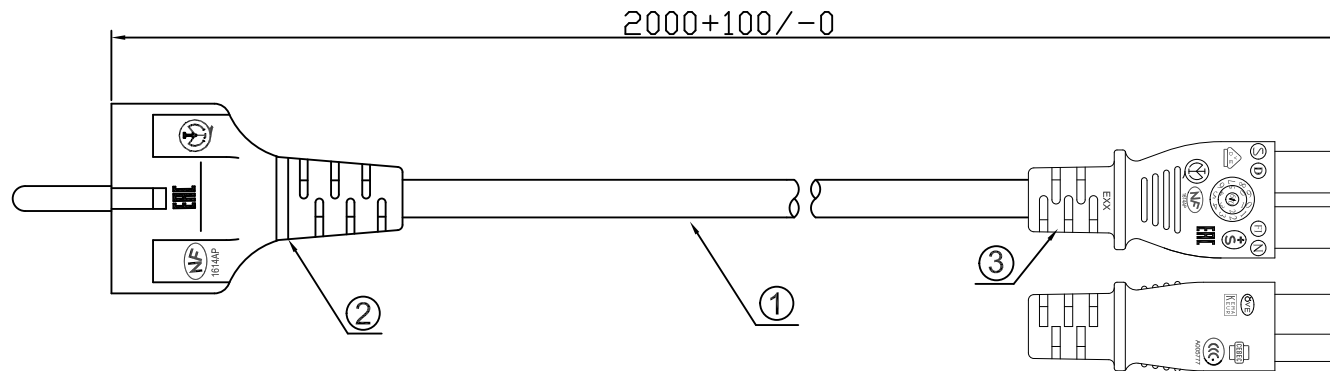

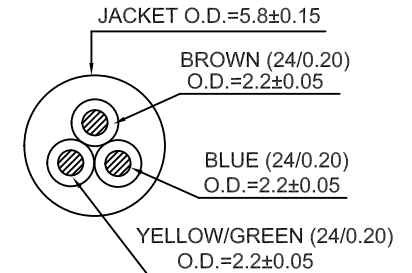


CABLE MARKING: <VDE> KEMA-KEUR CEBEC IEMMEQU ÖVE-+m+M NF-USE-1336 <SABS>
 SAI-004274-EA 4V-75 V-75 250/250V LIGHT DUTY CABO FLEXÍVEL IEC 60227-5
 300/300V H03VV-F 3G0.75mm² (N.M) --LINETEK-- "LF"

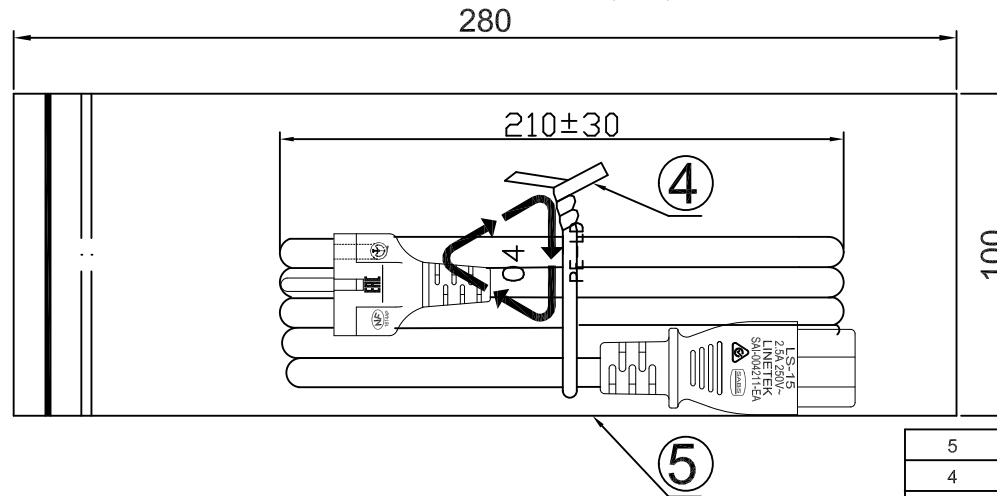

CROSS-SECTION VIEW








NOTES:

- 1.CABLE: THE CORD SHALL COMPLY WITH IEC60227.
- 2.PLUG: THE MOLDED PLUG SHALL COMPLY WITH IEC60884-1.
- 3.CONNCTOR: THE MOLDED CONNECTOR SHALL COMPLY WITH IEC60320-1 STANDARD(C5 CONNECTOR)
- 4.THE PRODUCT SHALL BE TESTED 100% FOR ALL SAFETY ELECTRICAL ITEMS.
- 5.COLOR:BLACK(EA0000)
- 6.PRINT: INDENT PRINT
- 7.THE PRODUCT SHOULD COMPLY WITH RoHS STANDARD.
- 8.N.M 50°C 24H 500G ABS PLATE

5	PE BAG (CPEA28010016)	1	EA
4	PE MINI TIE: BLACK	1	EA
3	MOLDED CONNECTOR:LS-15 2.5A/250V	1	EA
2	MOLDED PLUG:LP-34 16A/250V	1	EA
1	H03VV-F 0.75mm ² 3C BLACK	1	EA
ITEM	DESCRIPTION	Q'TY	U/M


Tolerance: >0±0.3 >1±0.5 >10±1 >20±2 Angle: ±1°	Approved by:		
	Checked by:		
	Drawn by:		
	Date:		
	Scale: X Unit: mm		
Specification Use Only		DWG. NO:	
		SHEET 1 OF 1	REV: 1

1		Original Picture		2014.12.25
REV	ECN NO	DESCRIPTION	APPD.	DATE

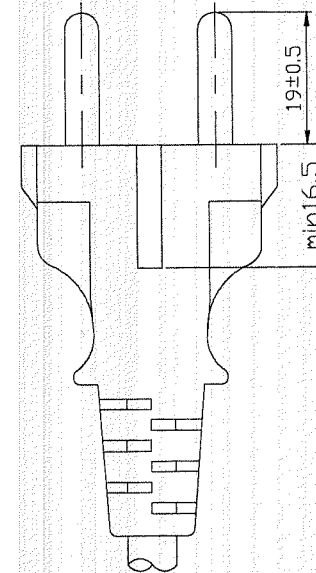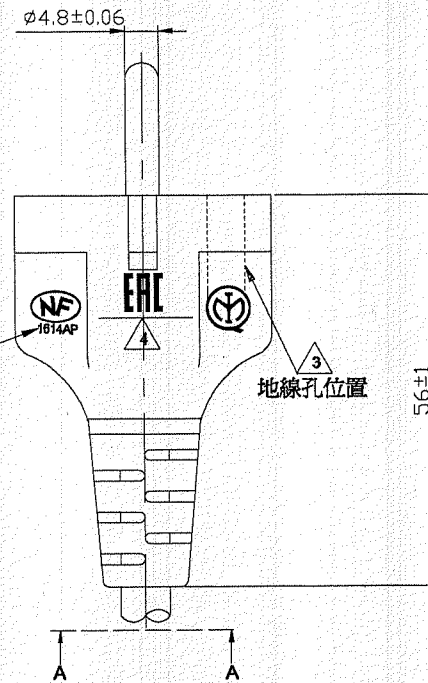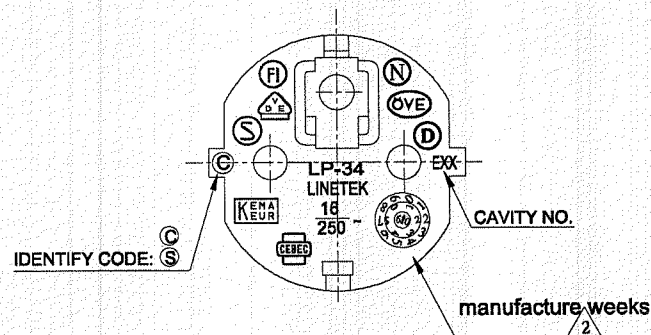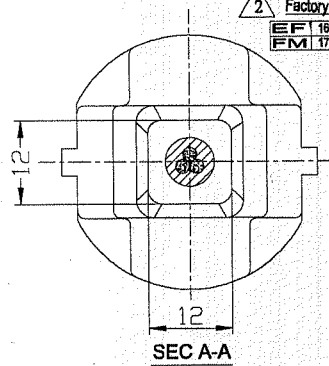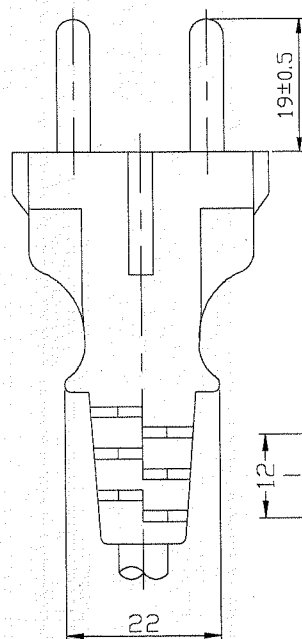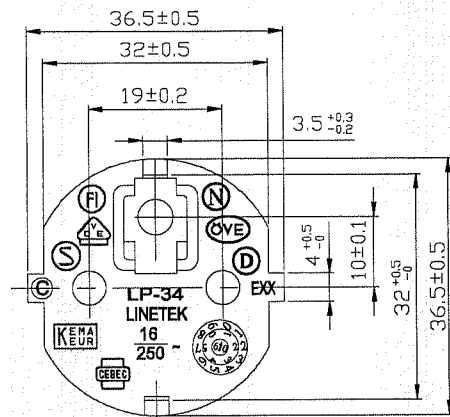



5		4 Change MARKING	29/10-13
4		3 Increased ground Kong identity	7/10-13
3		2 Add manufacture weeks and factory code	11/11/09
2		1 Add PC mark	12/09/06
1		Original Picture	17/03-05
REV	ECN NO	DESCRIPTION	APPD. DATE

Suitable Flexible cord: H03VV-F 3G 0.75mm ² H05VV-F 3G 0.75mm ² H05VV-F 3G 1.00mm ² H05VV-F 3G 1.50mm ² P5SA 3G 0.75mm ² (LW) P5SC 3G 0.75mm ² (LW) H05RN 3G 0.75/1.00mm ² H07RN 3G 1.00mm ² H05RR 3G 0.75/1.00mm ²	Tolerance:	Approve: <i>Jinior</i>				
	>0 ±0.3 ≥5 ±0.5 ≥10 ±1 ≥20 ±2	Checked:				
	Angle: ±1°	Engineer:	Description: LP-34(VDE)			
		Drawn: FJZ	Material: P.V.C	View:		
		Date: 28/10-13	Scale: XX	Unit: mm		
		Specification Use Only	Dwg.No.: MLD-ALPA006	REV	5.0	

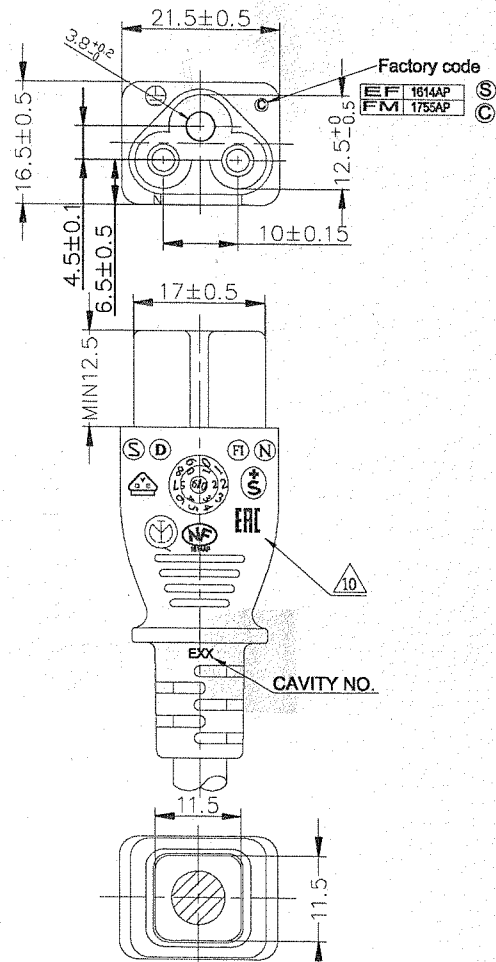


 A018679 (豐茂工廠代碼)
 A005777 (怡富萬工廠代碼)



SCALE:2:1

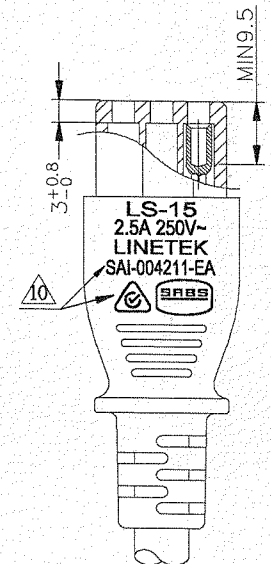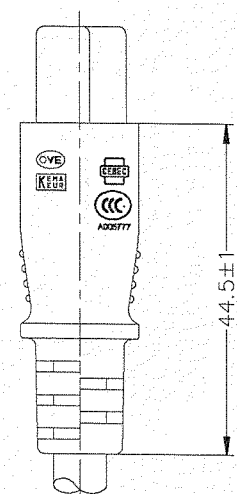

SCALE:3:1

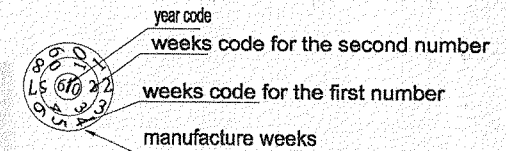

9		10. Change MARKING and Add RCM	29/10-13
8		9. Modify Dimension	06/06-12
7		8. change SABS marking	05/15-12
6		7. Modify Dimension	02/12-11
5	GA090299	6. Add Weeks	11/12-09
4	GA090072	5. Add EA Mark	17/08-09
3	GA090093	4. Add Mark	17/08-09
2		3. Add  mark	12/09-06
REV	ECN NO	DESCRIPTION	APPD. DATE

Suitable Flexible cord: 250V 2.5A H03VV-F 0.75mm ² /3C H05VV-F 0.75mm ² /3C H05VV-F 1.00mm ² /3C P5SA 0.75mm ² /3C P5SC 0.75mm ² /3C RVV 0.75/3C 300/300 RVV 1.00/3C 300/300	Tolerance: >0 ±0.3 ≤5 ±0.5 ≤10 ±1 ≤20 ±2	Approved: 	 Everfull Electronic (Shenzhen) Co.,Ltd.			
	Angle: ±1°	Checked:	Engineer:	Description:	LS-15(CCC+VDE+SAI+SABS)	
		Drawn:	FJZ	Material:	P.V.C	View: 
		Date:	2014.01.22	Scale:	1:1	Unit: mm
	Specification Use Only		Dwg.No.:	MLD-ALSA011	REV	9.0

Everfull Electronic (Shenzhen) Co.,Ltd.

PRODUCT SPEC

文件編號: EF₃-WRD-b038

製定日期: 2005. 08. 25

修改日期: 2011. 11. 10

版 本: 1. 3


頁 次: 1/1

Item		Unit	Specification
Product			H03VV-F
Conductor	Size	mm ²	0.75
	Material		Annealed Soft Bare Copper Wire
	Number	C	3
	Construction	pcs/mm	24/0.20
Insulation	Material		PVC
	Min.Thickness	mm	0.35
	Min.Avg.Thickness	mm	0.50
	Diameter	mm	2.2±0.05
Cadre	Construction		See Cross-Section
Jacket	Material		PVC(N.M)
	Min.Thickness	mm	0.41
	Min.Avg.Thickness	mm	0.60
	Diameter	mm	5.8±0.15
	Color		By Order
Marking	<VDE> KEMA-KEUR CEBEC IEMMEQU (D) (S) (F) ÖVE + + + + + NF-USE-1336 <SABS> SAI-004274-EA 4V-75 V-75 250/250V LIGHT DUTY CABO FLEXÍVEL IEC 60227-5 300/300V H03VV-F 3G0.75mm ² (N.M) -LINETEK--"LF"		

Electrical & Physical Property

Item	Unit	Specification	Standard
Conductor Resistance	Ω/KM	AT 20°C	Max.26.0
Insulation Resistance	MΩ/km	AT 70°C	Min0.010
Dielectric Withstand	VAC/5min	2000	NO Breakdown
Migration test	■ 50°C*500g*24H*ABS		Non Migration
	□ 60°C*500g*48H*ABS/PS		
	□ 105°C*1000g*72H*ABS/PS		
Flame Test	Sec	DZ-3	Max.60

Cross-Section View:

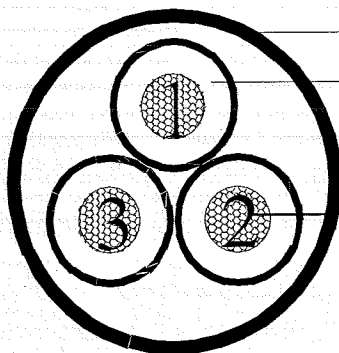

Jacket

Insulation

Conductor

Color Code:

1	Brown
2	Blue
3	Yellow/Green

Approved:

Checked:

Engineer: kenneth



BILL OF MATERIALS

CUSTOMER P/N	253451LTK
RFS. NO.	KW14120175

DATE	2015.01.21
PAGE	1/1

NO.	SUB PART	RAW MATERIAL				REMARK
		MANUFACTURER	GENERAL NAME	TYPE	FLAME CLASS	
1	FLEXIBLE CORD	All the materials approved by Everfull can be used	PVC COPPER WIRE	H03VV-F 0.75mm ² 3C BLACK	-	
2	PLUG:LP-34	All the materials approved by Everfull can be used	PVC(BLACK)	P0000-45-B0000	-	
		All the materials approved by Everfull can be used	EUROPEAN PLUG	TAB0002---	-	
3	CONNECTOR:LS-15	All the materials approved by Everfull can be used	PVC(BLACK)	P0000-45-B0000	-	
		All the materials approved by Everfull can be used	INNER	HA-----0020A	-	
		All the materials approved by Everfull can be used	INNER	HA-----0020B	-	
		All the materials approved by Everfull can be used	BARREL	Y00-P8S0021	-	
		All the materials approved by Everfull can be used	TERMINAL	Y00-P8S0023	-	
4	MINE TIE	All the materials approved by Everfull can be used	PE MINE TIE(BLACK)	CMI00002000	-	
5	PO BAG	All the materials approved by Everfull can be used	WATERPROOF PO BAG(88×65cm)	CPEO88066001	-	
6	CARTON	All the materials approved by Everfull can be used.	18"×13"×10"K=K	CRTKK18-13-10-6	-	

APPROVED BY:James

CHECKED BY:Kenneth

MADE BY:JOEHO