

# Specifications




Rating: 0.1A DC 30V  
 Insulation resistance: 100MΩ Min.  
 Withstand Voltage: 250V AC  
 Contact circuit: 30mΩ Max.  
 Operation Temperature: -20°C to +70°C  
 Drive Force: 230±50gf

## ORDER INFORMATION

6 4 S W T - B C 5 Z 0 7 9



Note  
 Combo: Black.White.Nylon natural

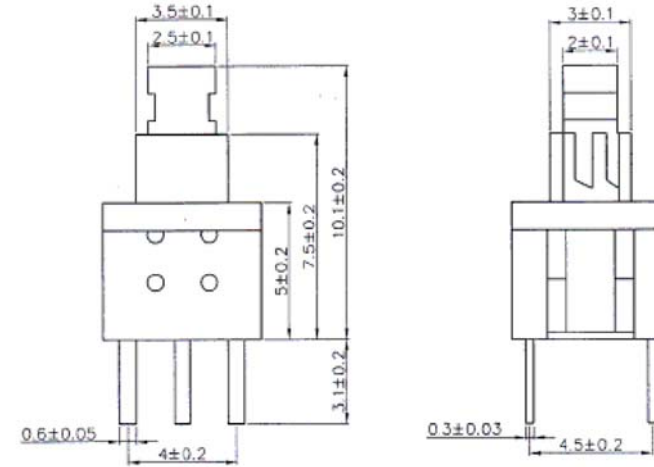

|     |               |          |     |
|-----|---------------|----------|-----|
| 7   | Contact piece |          | 2   |
| 6   | Hook          |          | 1   |
| 5   | Fillet        | Brass    | 5   |
| 4   | Base          |          | 1   |
| 3   | Cover         |          | 1   |
| 2   | Spring        |          | 1   |
| 1   | Button        |          | 1   |
| NO. | Part Name     | Material | Qty |

|  |                      |               |      |                           |                     |                   |     |
|--|----------------------|---------------|------|---------------------------|---------------------|-------------------|-----|
| <br>糧德精密有限公司<br>Amtek Technology Co., Ltd.<br>TEL: 886-2-2260-6878<br>FAX: 886-2-2260-8030 | 品名<br>TITLE          | Switch        |      |                           |                     | 頁數<br>Page        | 1/1 |
|  | 品號<br>PART NO.       | 64SWT-BC5Z079 |      |                           | 繪圖<br>DRAWN         | Roy<br>2015/08/26 |     |
|  | 圖號<br>DRAWING NO.    | 版本<br>REV.    | A    | 核對<br>CHECKED             | Derek<br>2015/08/26 |                   |     |
|  | 客戶品號<br>CUSTOMER P/N | 比例<br>SCALE   | None | 承認<br>APPROVED            | John<br>2015/08/26  |                   |     |
|  | 公差<br>TOLERANCE      | 單位<br>UNIT    | mm   | THIRD ANGLE<br>PROJECTION |                     |                   |     |

|      |                        |         |      |
|------|------------------------|---------|------|
| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |
|      |                        |         |      |