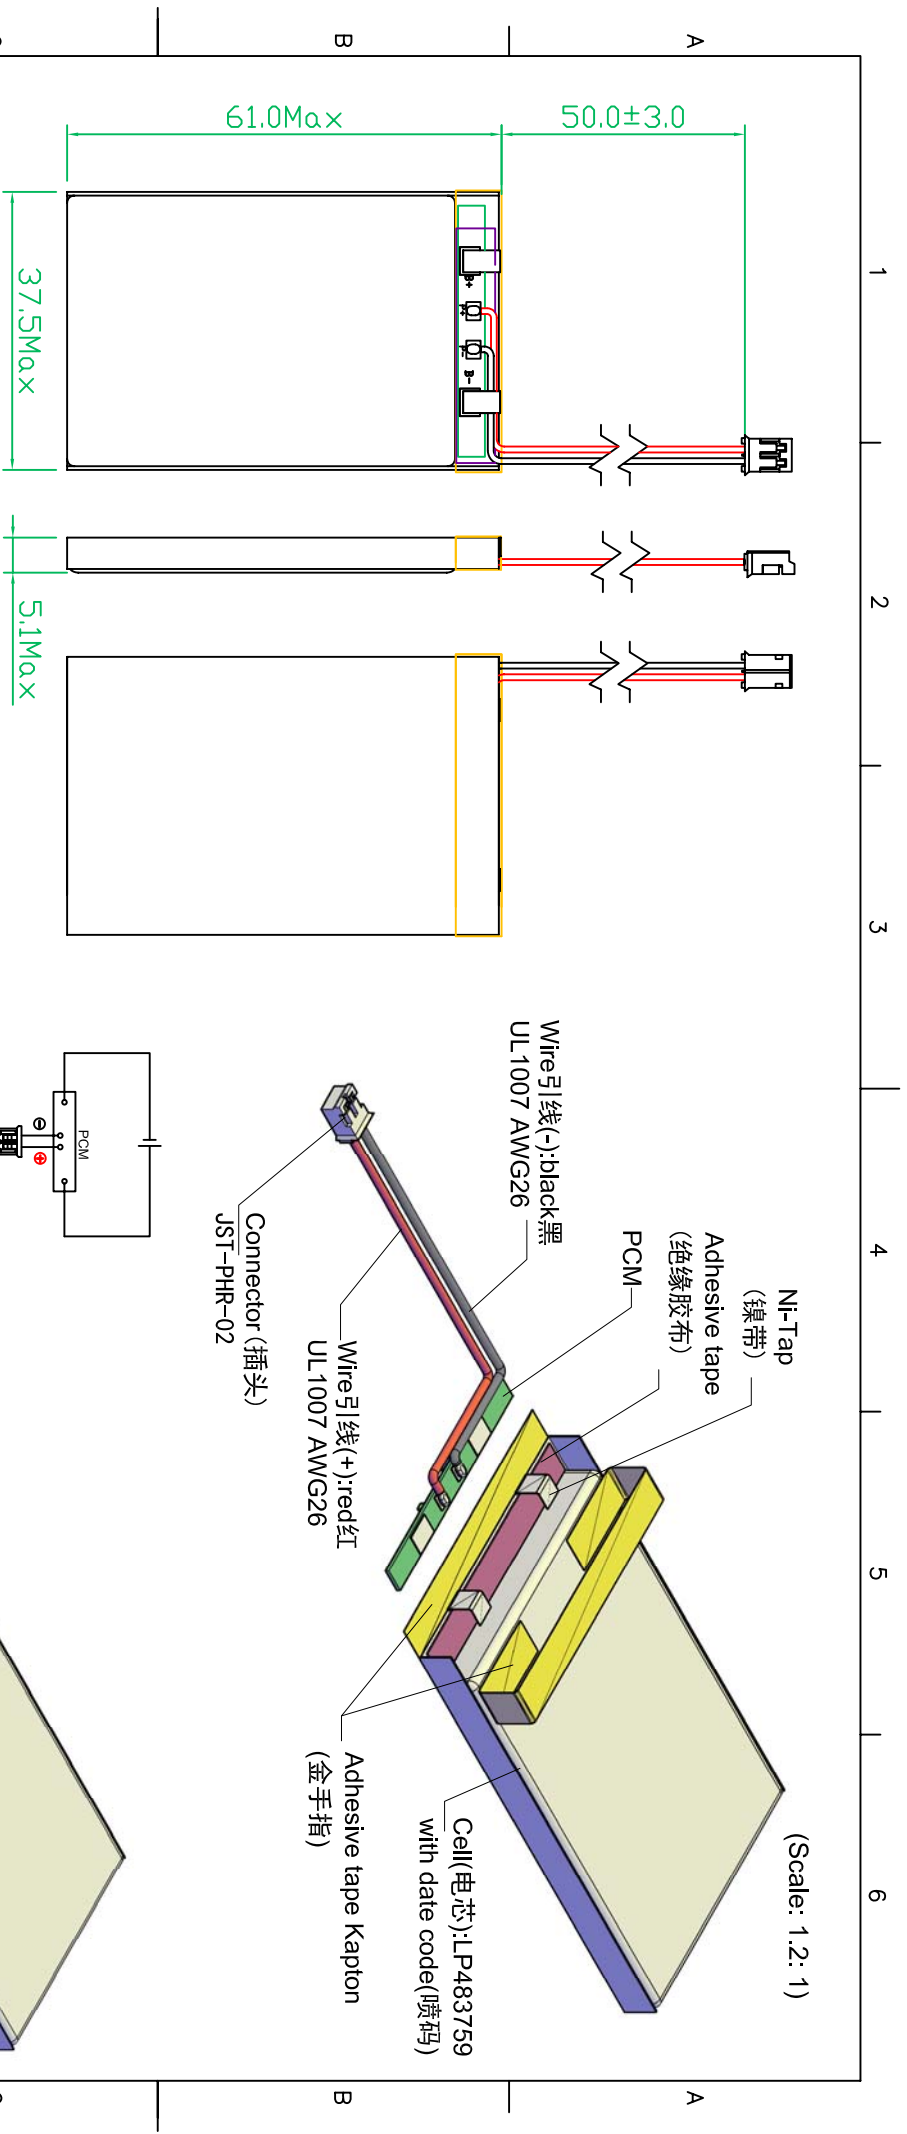


Model:		LP483759			
Battery pack specification (电池组规格)	Min.Capacity 最低容量(mAh) (0.2C,25±3°C) ※Single cell capacity (单体电芯容量)	1000	Overcharge Detection Voltage(V) 过充保护电压 (V) 4.28±0.05 Overdischarge Detection Voltage(V) 过放保护电压 (V) 3.0±0.1 Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 2.0 (A) Customer required Max loading current 客户要求最大的负载电流 peak value (A) 峰值 (A) Battery protection Related Value: (相关的电池保护值)		
	Typical Capacity 典型容量(mAh) (0.2C,25±3°C) ※Single cell capacity (单体电芯容量)	1100			
	Nominal Voltage 标称电压(V)	3.7			
	Internal impedance 内阻(≦) (mΩ,AC 1KHz)	200			
Ambient Conditions (环境温度)	Charge Temp. 充电温度(°C)	0-45	If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用负载电流大于EEMB提供值, 请提出来, 实际的应用情况对PCM的设计至关重要)		
	Discharge Temp. 放电温度(°C)	-20-60			
	Humidity(湿度)	65±20%			

D		D	
EEMB®		EEMB BATTERY	
Drawn:	Leiyuanchad	Revise No.:	E4-2009
Checked 1:	Blair	Projection:	
Checked 2:		Page:	1/1

Remark(备注):

1. No scratch, discoloration, discoloration and leakage on the appearance of the cell/电池表面无划痕、变形、污点及漏液等现象).

2. RoHS compliant(严格按照ROHS要求生产).

Title	LP483759-PCM-LD/	Drawn:	Leiyuan	Revise No.:	E4-2009
File NO.	A11323	Checked 1:	Blair	Projection:	1:1
		Checked 2:		Page:	1/1
		Approved:		Scale:	1:1
		Draw Date:	2015/06/04	Unit:	mm