



3.96mm Wafer Right Angle / Straight Type



Specifications

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Terminal: Brass / Tin Plated
Material: Nylon 66,UL94V-2

Part No.	Dimensions	
	A	B
3961RA-02TW-L	3.96	7.92
3961RA-03TW-L	7.92	11.88
3961RA-04TW-L	11.88	15.84
3961RA-05TW-L	15.84	19.80
3961RA-06TW-L	19.80	23.76
3961RA-07TW-L	23.76	27.72
3961RA-08TW-L	27.72	31.68
3961RA-09TW-L	31.68	35.64
3961RA-10TW-L	35.64	39.60
3961RA-11TW-L	39.60	43.56
3961RA-12TW-L	43.56	47.52
3961RA-13TW-L	47.52	51.48
3961RA-14TW-L	51.48	55.44
3961RA-15TW-L	55.44	59.40
3961RA-16TW-L	59.40	63.36
3961RA-17TW-L	63.36	67.32
3961RA-18TW-L	67.32	71.28
3961RA-19TW-L	71.28	75.24
3961RA-20TW-L	75.24	79.20



P.C.B. LAYOUT

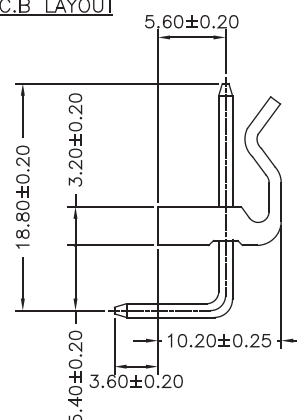
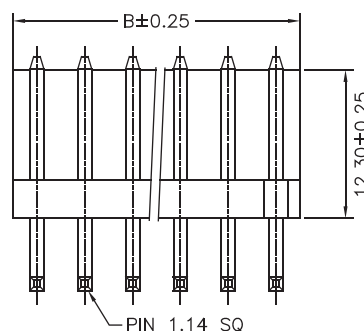


Part No.:3961RA-XXTW-L



Specifications

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Terminal: Brass / Tin Plated
Material: Nylon 66,UL94V-2

Part No.	Dimensions	
	A	B
3961SA-02TW-L	3.96	7.92
3961SA-03TW-L	7.92	11.88
3961SA-04TW-L	11.88	15.84
3961SA-05TW-L	15.84	19.80
3961SA-06TW-L	19.80	23.76
3961SA-07TW-L	23.76	27.72
3961SA-08TW-L	27.72	31.68
3961SA-09TW-L	31.68	35.64
3961SA-10TW-L	35.64	39.60
3961SA-11TW-L	39.60	43.56
3961SA-12TW-L	43.56	47.52
3961SA-13TW-L	47.52	51.48
3961SA-14TW-L	51.48	55.44
3961SA-15TW-L	55.44	59.40
3961SA-16TW-L	59.40	63.36
3961SA-17TW-L	63.36	67.32
3961SA-18TW-L	67.32	71.28
3961SA-19TW-L	71.28	75.24
3961SA-20TW-L	75.24	79.20

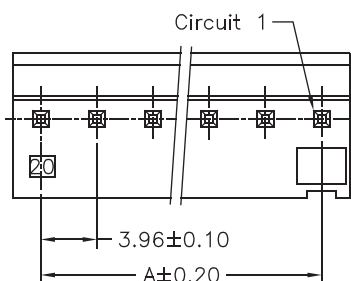

P.C.B. LAYOUT

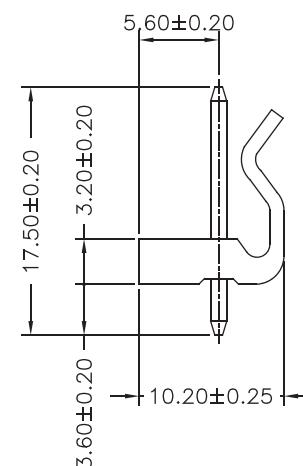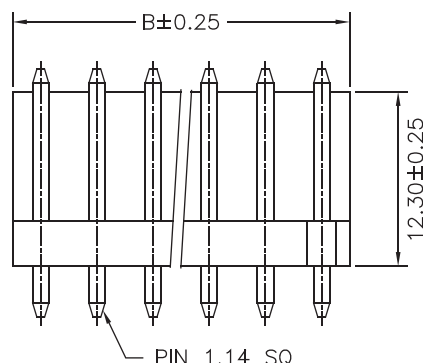

Part No.:3961SA-XXTW-L