

SPECIFICATION

Current Rating:1 AMP

Insulation Resistance:1000 M Ω Min

Contact Resistance:15m Ω Max

Dielectric voltage:500V AC for one minute

Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:PBT+30% Glass Fiber,UL 94V-0,Black

Contact Pin:Copper Alloy

ORDER INFORMATION

5 8 D 2 S N N - X X T 0 A - C 1

S:Dip Straight Type

No. of contacts
6~60(even)

T0:Tin Plated

A:Tray, W/O Cap





AMTEK 耀德

2019.08.19

Released DCC

Pos	Dim.A	Dim.B	Dim.C
6	10.10	4.00	5.00
8	12.10	6.00	7.00
10	14.10	8.00	9.00
12	16.10	10.00	11.00
14	18.10	12.00	13.00
16	20.10	14.00	15.00
18	22.10	16.00	17.00
20	24.10	18.00	19.00
22	26.10	20.00	21.00
24	28.10	22.00	23.00
26	30.10	24.00	25.00
28	32.10	26.00	27.00
30	34.10	28.00	29.00
32	36.10	30.00	31.00

Pos	Dim.A	Dim.B	Dim.C
34	38.10	32.00	33.00
36	40.10	34.00	35.00
38	42.10	36.00	37.00
40	44.10	38.00	39.00
42	46.10	40.00	41.00
44	48.10	42.00	43.00
46	50.10	44.00	45.00
48	52.10	46.00	47.00
50	54.10	48.00	49.00
52	56.10	50.00	51.00
54	58.10	52.00	53.00
56	60.10	54.00	55.00
58	62.10	56.00	57.00
60	64.10	58.00	59.00

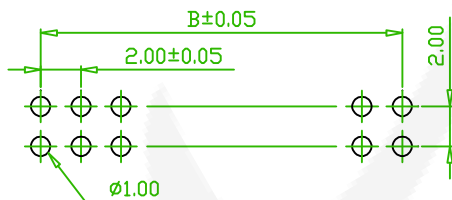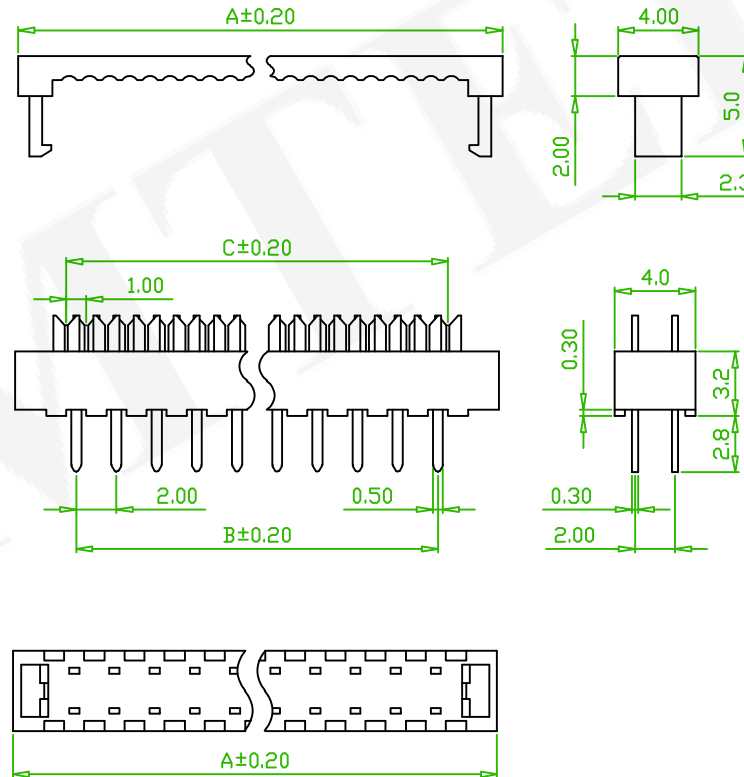

RECOMMEND P.C. BOARD LAYOUT

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	DIP PLUG 2.0mm					
	品號 PART NO.	58D2SNN-XXT0A-C1			繪圖 DRAWN	Benson 2019/08/19	
	圖號 DRAWING NO.	GN046-BS218	版本 REV.	A	核對 CHECKED	Josh 2019/08/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/08/19	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		