

MATERIAL & FINISH

Housing: PBT. UL94V-0, black or gray

Insert: PBT. UL94V-0, gray

Conductor:

Stamping pin 0.35 x 0.42 mm phosphor bronze,

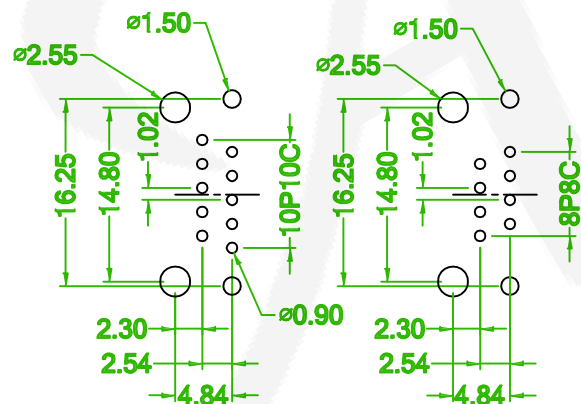
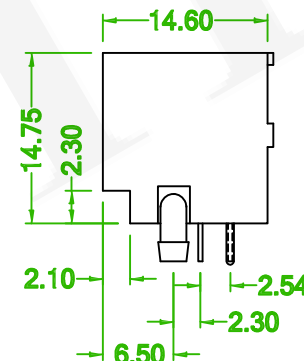

Gold plated over nickel on contact area,

Tin plated over nickel on solder area.


ORDER INFORMATION

5 R J 1 D R 1 0 R 9 N - X X X X 0 0 L - 816 - A 1

N:W/O Ear	Number of position 8:8P A:10P	Number of contact 8:8C A:10C	SA:Selective 6u" SF:Selective 15u" SD:Selective 30u" SH:Selective 50u"	L:RoHS +PBT+Tray
-----------	-------------------------------------	------------------------------------	---	---------------------

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

Shielded



Old Part No.:S816-L

REV.	ECN NO.:180605,Revise the Plated:S5->SH	Mia	2018/10/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MODULAR JACK SHIELDED SIDE ENTRY H=14.7 W=14.6				頁數 Page	1/1
	品號 PART NO.	5RJ1DR10R9N-XXXX00L-816-A1				繪圖 DRAWN	Jeff 2015/09/16
	圖號 DRAWING NO.	GW005-MD528		版本 REV.	B	核對 CHECKED	John 2015/09/16
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	John 2015/09/16
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20		單位 UNIT	mm	THIRD ANGLE PROJECTION	