


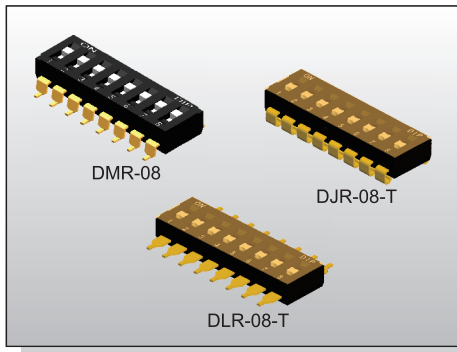

### FEATURES

- ※ Low profile for space saving
- ※ Gold contact for high reliability
- ※ Top tape type for washing process


### APPLICATION

- ※ Industrial control
- ※ Automatic machines control
- ※ Telecommunication

### SPECIFICATION

|                       |                    |
|-----------------------|--------------------|
| Contact Rating        | 25mA, 24V DC       |
| Contact Resistance    | 50mΩ max.          |
| Insulation Resistance | 100MΩ min. 500V DC |
| Dielectric Strength   | 500V AC/1 minute   |
| Operating Force       | 1,000gf max.       |
| Travel                | 1mm                |
| Operating Life        | 2,000 cycles       |
| Operating Temp.       | -20°C ~ +85°C      |
| Storage Temp.         | -40°C ~ +85°C      |

### CIRCUIT

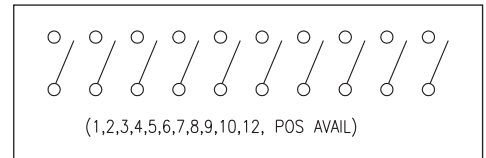

### PACKAGE

#### <Tube>

DM(R), DJ(R):

01: 130 pcs 02: 76 pcs 03: 55 pcs 04: 42 pcs  
05: 35 pcs 06: 28 pcs 07: 25 pcs 08: 22 pcs  
09: 20 pcs 10: 18 pcs 12: 15 pcs

#### <Tape & Reel>

DM(R)-01-T-T/R: 800 pcs

DMR-02-T-T/R~DMR-12-T-T/R: 900 pcs

DM-(01)(05)(07)-T/R: 800 pcs


DM-(02)(03)(04)(06)(08)(09)(10)(12)-T/R: 700 pcs

DJR-(02)(03)(04)(08)(09)(10)-T-T/R: 1000 pcs


#### <Bag>

DL(R): 1000 pcs


### HOW TO ORDER

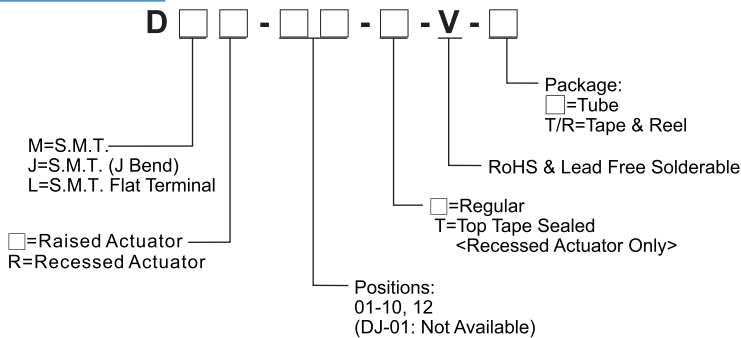


### DM(R)

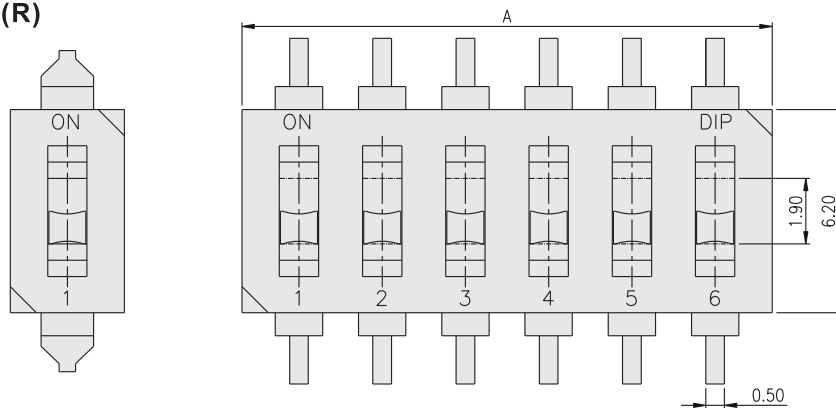



| PART NO. | NO.OF POS. | DIM.A | DIM.B |
|----------|------------|-------|-------|
| DM(R)-01 | 1          | 3.48  |       |
| DM(R)-02 | 2          | 6.02  | 2.54  |
| DM(R)-03 | 3          | 8.56  | 5.08  |
| DM(R)-04 | 4          | 11.10 | 7.62  |
| DM(R)-05 | 5          | 13.64 | 10.16 |
| DM(R)-06 | 6          | 16.18 | 12.70 |
| DM(R)-07 | 7          | 18.72 | 15.24 |
| DM(R)-08 | 8          | 21.26 | 17.78 |
| DM(R)-09 | 9          | 23.80 | 20.32 |
| DM(R)-10 | 10         | 26.34 | 22.86 |
| DM(R)-12 | 12         | 31.42 | 27.94 |




DM(R)-01

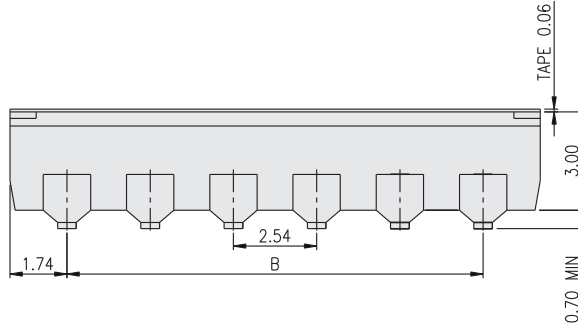


DM(R)-02~12

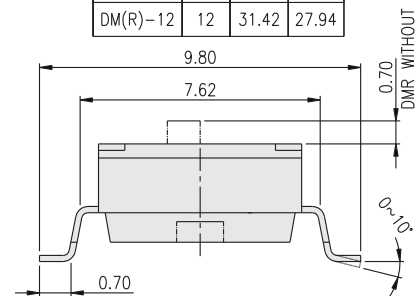


## DJ(R)

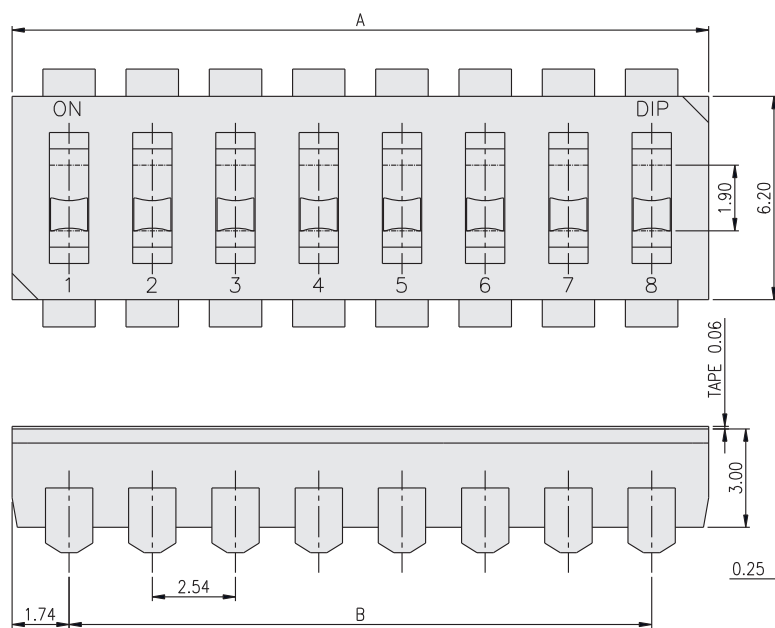

| PART NO. | NO.OF POS. | DIM.A | DIM.B |
|----------|------------|-------|-------|
| DJ(R)-02 | 2          | 6.02  | 2.54  |
| DJ(R)-03 | 3          | 8.56  | 5.08  |
| DJ(R)-04 | 4          | 11.10 | 7.62  |
| DJ(R)-05 | 5          | 13.64 | 10.16 |
| DJ(R)-06 | 6          | 16.18 | 12.70 |
| DJ(R)-07 | 7          | 18.72 | 15.24 |
| DJ(R)-08 | 8          | 21.26 | 17.78 |
| DJ(R)-09 | 9          | 23.80 | 20.32 |
| DJ(R)-10 | 10         | 26.34 | 22.86 |
| DJ(R)-12 | 12         | 31.42 | 27.94 |

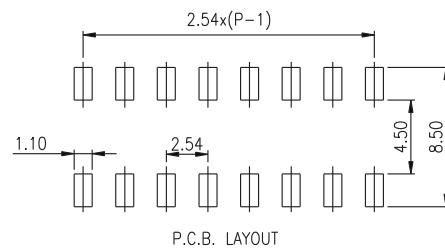

## DL(R)

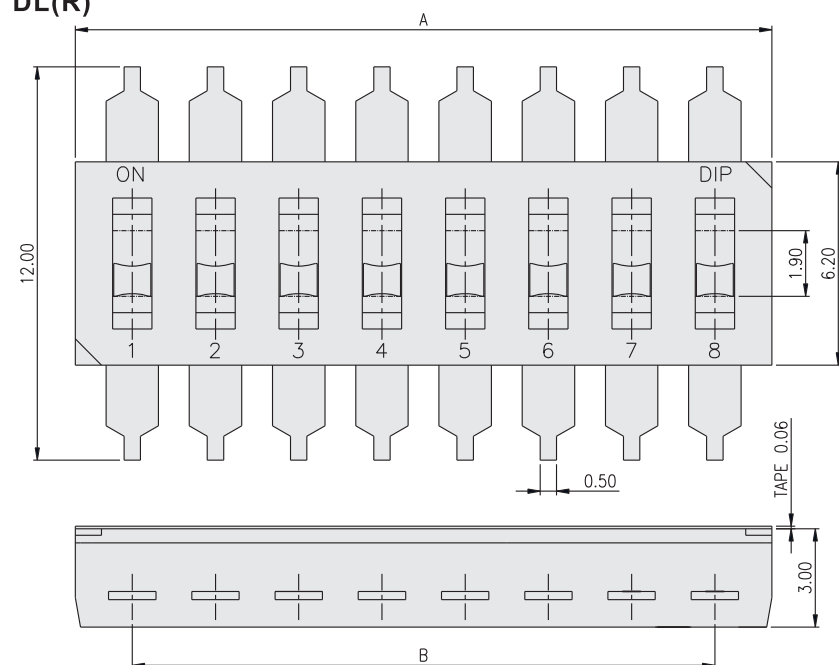

| PART NO. | NO.OF POS. | DIM.A | DIM.B |
|----------|------------|-------|-------|
| DL(R)-01 | 1          | 3.48  |       |
| DL(R)-02 | 2          | 6.02  | 2.54  |
| DL(R)-03 | 3          | 8.56  | 5.08  |
| DL(R)-04 | 4          | 11.10 | 7.62  |
| DL(R)-05 | 5          | 13.64 | 10.16 |
| DL(R)-06 | 6          | 16.18 | 12.70 |
| DL(R)-07 | 7          | 18.72 | 15.24 |
| DL(R)-08 | 8          | 21.26 | 17.78 |
| DL(R)-09 | 9          | 23.80 | 20.32 |
| DL(R)-10 | 10         | 26.34 | 22.86 |
| DL(R)-12 | 12         | 31.42 | 27.94 |

