



Features of Screw Clamp Terminal Blocks

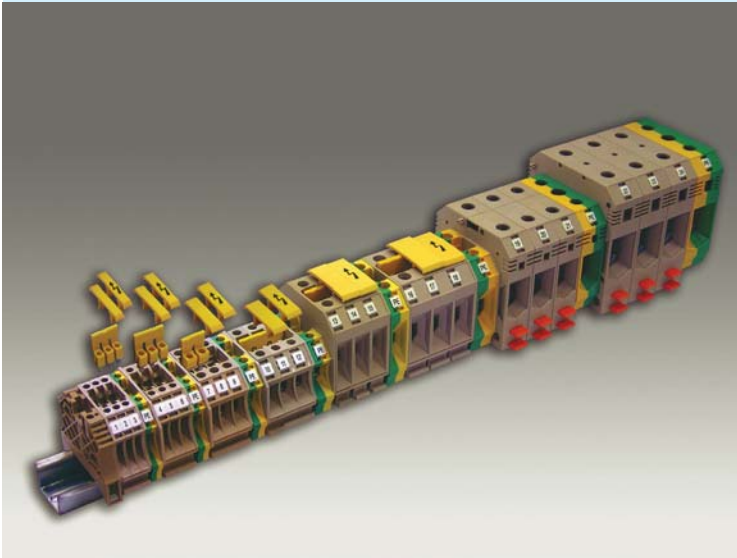

CDU 2.5



Features of Screw Clamp Terminal Blocks


- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismounting from the terminal rail.

螺絲固定型接線座之特性


- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式 (可連接多組導線)
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易

| Specifications (產品規格) | 2.5 mm ² | |
|-----------------------------------------------------------------------|----------------------------------------|------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | |
| UL | cUL ^{us} 600 V/24 A/AWG 10-22 | |
| CSA | 600 V/24 A/AWG 10-22 | |
| IEC | 800V/24A/0.5-2.5 mm ² | |
| Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級) | 8KV / 3 | |
| Torque (lb-in) (扭緊力矩) | 7 | |
| Clamping Screw (M) (螺絲) | M3 | |
| Insulation stripping length(mm) (剝線長度) | 10-12 mm | |
| Material/Available Color (材質顏色) | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | |
| For TS35x7.5 | 5 x 60 x 47.5 | |
| For TS35x15 | 5 x 60 x 55 | |
| Accessories (附件) | Cat. No. | Qty. |
| End Bracket (終端擋板) | SEW35 | 50 |
| | CEW35/2 | 50 |
| End Plate (擋板) | CEP 1 | 50 |
| Partition (擋板/隔片) | CEP 5 | 50 |
| Cross Jumper (中心式聯接件) | CQV 2.5/2 | 50 |
| | CQV 2.5/3 | 50 |
| | CQV 2.5/4 | 50 |
| | CQV 2.5/10 | 20 |
| Comb Link (邊接式聯接件) | CQB 2.5/2 | 50 |
| | CQB 2.5/3 | 50 |
| | CQB 2.5/10 | 20 |
| Warning Cover (安全標示蓋) | WS-2.5 | 50 |
| Marking Tags (標記號) | W5 W5Z W5K | 500 |
| | W7 W7Z W7K | 400 |
| Test plug (測試插頭) | TPS2.0 (ø2.0) | 20 |
| | TPS2.3 (ø2.3) | 20 |
| Socket (測試插孔) | TP2.0 | 50 |
| | TP2.3 | 50 |
| Protection Cover (防觸蓋) | DP1 | 20 |
| Retaining Plates (中界板) | AD1 | 50 |
| Tool (工具) | DS3 | |


CDU 2.5 SL



CDU 4





CDU 4 SL




| Specifications (產品規格) | 2.5 mm ² | | 4 mm ² | | 4 mm ² | |
|-------------------------------------------------------------------------|---------------------------------------|------|---------------------------------------|------|---------------------------------------|------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | | Rated voltage/Rated current/Wire size | | Rated voltage/Rated current/Wire size | |
| UL | 600V/24A/AWG 10-22 | | UL [®] 600 V/35 A/AWG 8-22 | | 600 V/35 A/AWG 8-22 | |
| CSA | 600V/24A/AWG 10-22 | | 600 V/35 A/AWG 8-22 | | 600 V/35 A/AWG 8-22 | |
| IEC | 800V/24A/0.5-2.5mm ² | | 800 V/32 A/0.5-4mm ² | | 500V/32A/0.5-4mm ² | |
| Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級) | 8KV / 3 | | 8KV / 3 | | 8KV / 3 | |
| Torque (lb-in) (扭緊力矩) | 7 | | 7.7 | | 7.7 | |
| Clamping Screw (M) (螺絲) | M3 | | M3 | | M3 | |
| Insulation stripping length(mm) (剝線長度) | 10-12 mm | | 10-12 mm | | 10-12 mm | |
| Material/Available Color (材質顏色) | | | | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | | T / W / H (mm) | | T / W / H (mm) | |
| For TS35x7.5 | 5/60/47.5 | | 6 x 60 x 47.5 | | 6 x 60 x 47.5 | |
| For TS35x15 | 5/60/55 | | 6 x 60 x 55 | | 6 x 60 x 55 | |
| Accessories (附件) | Cat. No. | Qty. | Cat. No. | Qty. | Cat. No. | Qty. |
| End Bracket (終端擋板) | SEW35 | 50 | SEW35 | 50 | SEW35 | 50 |
| | CEW35/2 | 50 | CEW35/2 | 50 | CEW35/2 | 50 |
| End Plate (擋板) | CEP 1 | 50 | CEP 1 | 50 | CEP 1 | 50 |
| Partition (擋板/隔片) | CEP 5 | 50 | CEP 5 | 50 | CEP 5 | 50 |
| Cross Jumper (中心式聯接件) | CQV 2.5/2 | 50 | CQV 4/2 | 50 | CQV 4/2 | 50 |
| | CQV 2.5/3 | 50 | CQV 4/3 | 50 | CQV 4/3 | 50 |
| | CQV 2.5/4 | 50 | CQV 4/4 | 50 | CQV 4/4 | 50 |
| | CQV 2.5/10 | 20 | CQV 4/10 | 20 | CQV 4/10 | 20 |
| | CQB 2.5/2 | 50 | CQB 4/2 | 50 | CQB 4/2 | 50 |
| Comb Link (邊接式聯接件) | CQB 2.5/3 | 50 | CQB 4/3 | 50 | CQB 4/3 | 50 |
| | CQB 2.5/10 | 20 | CQB 4/10 | 20 | CQB 4/10 | 20 |
| | WS-2.5 | 50 | WS-4 | 50 | WS-4 | 50 |
| Warning Cover (安全標示蓋) | WS-2.5 | 50 | WS-4 | 50 | WS-4 | 50 |
| Marking Tags (標記號) | W5 W5Z W5K | 500 | W6 W6Z W6K | 500 | W6 W6Z W6K | 500 |
| | W7 W7Z W7K | 400 | W8 W8Z W8K | 400 | W8 W8Z W8K | 400 |
| Test plug (測試插頭) | TPS2.0 (Ø2.0) | 20 | TPS2.3 (Ø2.3) | 20 | TPS2.3 (Ø2.3) | 20 |
| | TPS2.3 (Ø2.3) | 20 | | | | |
| Socket (測試插孔) | TP2.0 | 50 | TP2.3 | 50 | TP2.3 | 50 |
| | TP2.3 | 50 | | | | |
| Protection Cover (防觸蓋) | DP1 | 20 | DP1 | 20 | DP1 | 20 |
| Retaining Plates (中界板) | AD1 | 50 | AD1 | 50 | AD1 | 50 |
| Tool (工具) | DS3 | | DS3 | | DS3 | |



CDU 6

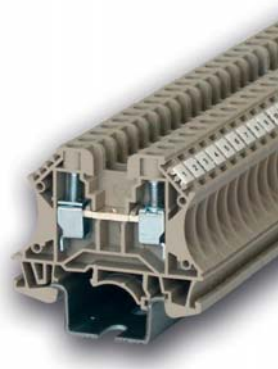

CDU 6 SL




CDU 10

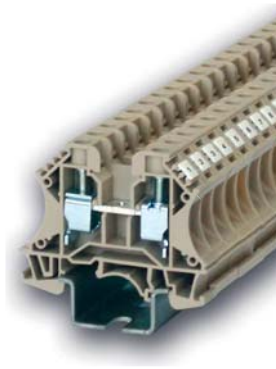


| Specifications (產品規格) | 6 mm ² | 6 mm ² | 10 mm ² |
|-----------------------------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size |
| UL | 600 V/50 A/AWG 8-20 | 600 V/50 A/AWG 8-20 | 600 V/65 A/AWG 6-16 |
| CSA | 600 V/50 A/AWG 8-20 | 600 V/50 A/AWG 8-20 | 600 V/65 A/AWG 6-16 |
| IEC | 800V/41A/0.5-6mm ² | 800V/41A/0.5-6mm ² | 1000V/57A/1.5-10mm ² |
| Insulating impulse voltage withstand /Pollution degree (額定衝擊電壓 /污染等級) | 8KV / 3 | 8KV / 3 | 8KV / 3 |
| Torque (lb-in) (扭緊力矩) | 14 | 14 | 19 |
| Clamping Screw (M) (螺絲) | M4 | M4 | M4 |
| Insulation stripping length(mm) (剝線長度) | 12-14 mm | 12-14 mm | 12 14 mm |
| Material/Available Color (材質顏色) | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | T / W / H (mm) | T / W / H (mm) |
| For TS35x7.5 | 8 x 60 x 47.5 | 8 x 60 x 47.5 | 10 x 60 x 47.5 |
| For TS35x15 | 8 x 60 x 55 | 8 x 60 x 55 | 10 x 60 x 55 |
| Accessories (附件) | Cat. No. Qty. | Cat. No. Qty. | Cat. No. Qty. |
| End Bracket (終端擋板) | SEW35 50 CEW35/2 50 | SEW35 50 CEW35/2 50 | SEW35 50 CEW35/2 50 |
| End Plate (擋板) | CEP 1 50 | CEP 1 50 | CEP 1 50 |
| Partition (擋板/隔片) | CEP 5 50 | CEP 5 50 | CEP 5 50 |
| Cross Jumper (中心式聯接件) | CQV 6/2 50 | CQV 6/2 50 | CQV 10/2 50 |
| | CQV 6/3 50 | CQV 6/3 50 | CQV 10/3 50 |
| | CQV 6/4 50 | CQV 6/4 50 | CQV 10/4 50 |
| | CQV 6/10 20 | CQV 6/10 20 | CQV 10/10 20 |
| | CQB-6/2 50 | CQB-6/2 50 | CQB-10/2 50 |
| Comb Link (邊接式聯接件) | CQB-6/3 50 | CQB-6/3 50 | CQB-10/3 50 |
| | CQB-6/10 20 | CQB-6/10 20 | CQB-10/10 20 |
| | WS-6 50 | WS-6 50 | WS-10 50 |
| Warning Cover (安全標示蓋) | WS-6 50 | WS-6 50 | WS-10 50 |
| Marking Tags (標記號) | W6 W6Z W6K 500 | W6 W6Z W6K 500 | W6 W6Z W6K 500 |
| | W8 W8Z W8K 400 | W8 W8Z W8K 400 | W8 W8Z W8K 400 |
| Test plug (測試插頭) | TPS2.3 (Ø2.3) 20 | TPS2.3 (Ø2.3) 20 | TPS2.3 (Ø2.3) 20 |
| | TPS4 (Ø4) 20 | TPS4 (Ø4) 20 | TPS4 (Ø4) 20 |
| Socket (測試插孔) | TP2.3 50 | TP2.3 50 | TP2.3 50 |
| | TP4 50 | TP4 50 | TP4 50 |
| Protection Cover (防觸蓋) | DP1 20 | DP1 20 | DP1 20 |
| Retaining Plates (中界板) | AD1 50 | AD1 50 | AD1 50 |
| Tool (工具) | DS4 | DS4 | DS4 |


CDU10 SL



CDU 16



CDU 35



| Specifications (產品規格) | 10 mm ² | 16 mm ² | 35 mm ² |
|----------------------------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size |
| UL | 600 V/65 A/AWG 6-16 | 600 V/78 A/AWG 4-14 | 1000 V/114 A/AWG 2-10 |
| CSA | 600 V/65 A/AWG 6-16 | 600 V/78 A/AWG 4-14 | 1000 V/114 A/AWG 2-10 |
| IEC | 1000V/57A/6-16mm ² | 1000V/76A/2.5-16mm ² | 1000V/125A/4-35mm ² |
| Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級) | 8KV / 3 | 8KV / 3 | 8KV / 3 |
| Torque (lb-in) (扭緊力矩) | 19 | 31 | 51 |
| Clamping Screw (M) (螺絲) | M4 | M5 | M6 |
| Insulation stripping length(mm) (剝線長度) | 12-14 mm | 15-17 mm | 16-18 mm |
| Material/Available Color (材質顏色) | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | T / W / H (mm) | T / W / H (mm) |
| For TS35x7.5 | 10 x 60 x 47.5 | 12 x 60 x 63.5 | 16x 60 x 63.5 |
| For TS35x15 | 10 x 60 x 55 | 12 x 60 x 71 | 16 x 60 x 71 |
| Accessories (附件) | Cat. No. Qty. | Cat. No. Qty. | Cat. No. Qty. |
| End Bracket (終端擋板) | SEW35 50 CEW35/2 50 | SEW35 50 CEW35/1 50 | SEW35 50 CEW35/1 50 |
| End Plate (擋板) | CEP 1 50 | CEP 2 50 | CEP 2 50 |
| Partition (擋板/隔片) | CEP 5 50 | | |
| Cross Jumper (中心式聯接件) | CQV 10/2 50 | CQV 16/2 50 | CQV 35/2 50 |
| | CQV 10/3 50 | CQV 16/3 50 | CQV 35/3 50 |
| | CQV 10/4 50 | CQV 16/4 50 | CQV 35/4 50 |
| | CQV 10/10 20 | | |
| Comb Link (邊接式聯接件) | CQB-10/2 50 | CQB 16/2 50 | CQB 35/2 50 |
| | CQB-10/3 50 | CQB 16/3 50 | CQB 35/3 50 |
| | CQB-10/10 20 | CQB 16/10 20 | CQB 35/10 20 |
| Warning Cover (安全標示蓋) | WS-10 50 | WS-16 50 | WS-35 50 |
| Marking Tags (標記號) | W6 W6Z W6K 500 | W6 W6Z W6K 500 | W6 W6Z W6K 500 |
| | W8 W8Z W8K 400 | W8 W8Z W8K 400 | W8 W8Z W8K 400 |
| Test plug (測試插頭) | TPS2.3 (Ø2.3) 20 | | |
| | TPS4 (Ø4) 20 | TPS4 (Ø4) 20 | TPS4 (Ø4) 20 |
| Socket (測試插孔) | TP2.3 50 | | |
| | TP4 50 | TP4 50 | TP4 50 |
| Protection Cover (防觸蓋) | DP1 20 | DP1 20 | DP1 20 |
| Retaining Plates (中界板) | AD1 50 | AD2 50 | AD2 50 |
| Tool (工具) | DS4 | DS4 | DS6 |

CDU 50



CDU 95





CDU 150





| Specifications (產品規格) | 50 mm ² | 95 mm ² | 150 mm ² |
|-------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size |
| UL | c 1000 V / 150 A / AWG 1/0-6 | c 1000 V / 230 A / AWG 4/0-2 | 600V/275A/AWG 2-300 |
| CSA | 1000 V / 150 A / AWG 1/0-6 | 1000 V / 230 A / AWG 4/0-2 | 600V/275A/AWG 2-300 |
| IEC | 1000V/150A/16-50 mm ² | 1000V/232A/35-95 mm ² | 1000V/309A/35-150mm ² |
| Insulating impulse voltage withstand (額定衝擊電壓 / Pollution degree / 污染等級) | 8KV / 3 | 8KV / 3 | 8KV / 3 |
| Torque (lb-in) (扭緊力矩) | 53 | 150 | 165 |
| Clamping Screw (M) (螺絲) | M6 | M8 | M10 |
| Insulation stripping length(mm) (剝線長度) | 25-30 mm | 30-35 mm | 30-40 mm |
| Material/Available Color (材質顏色) | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | T / W / H (mm) | T / W / H (mm) |
| For TS35x7.5 | 20 x 70.5 x 76 | 25 x 80 x 90 | 31x93x109 |
| For TS35x15 | 20 x 70.5 x 83.5 | 25 x 80 x 97.5 | 31x93x116.5 |
| Accessories (附件) | Cat. No. Qty. | Cat. No. Qty. | Cat. No. Qty. |
| End Bracket (終端擋板) | SEW35 50 CEW35/1 50 | SEW35 50 CEW35/1 50 | CEW35/1 50 |
| End Plate (擋板) | | | |
| Partition (擋板/隔片) | | | |
| Cross Jumper (中心式聯接件) | CQV 50/2 50 CQV 50/3 50 | | |
| Comb Link (邊接式聯接件) | CQB-50/2 50 CQB-50/3 50 | CQB-95/2 50 CQB-95/3 50 | CQB150/2 50 |
| Warning Cover (安全標示蓋) | | | |
| Marking Tags (標記號) | W6 W6Z W6K 500 W8 W8Z W8K 400 | W6 W6Z W6K 500 W8 W8Z W8K 400 | W6 W6Z W6K 500 W8 W8Z W8K 500 |
| Test plug (測試插頭) | | | |
| Socket (測試插孔) | | | |
| Protection Cover (防觸蓋) | | | |
| Retaining Plates (中界板) | | | |
| Tool (工具) | DK5 | DK6 | DK8 |

CTL6



CTL6-1




CDUS 2.5




| Specifications (產品規格) | 6 mm ² | 6 mm ² | 2.5 mm ² |
|----------------------------------------------------------------------|----------------------------------------------------|----------------------------------------------------|----------------------------------------------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size |
| UL | c 300V/45A/AWG 8-22 | c 300V/45A/AWG 8-22 | 300V/20A/AWG 12-22 |
| CSA | 300V/45A/AWG 8-22 | 300V/45A/AWG 8-22 | 300V/20A/AWG 12-22 |
| IEC | 800V/41A/0.5-6 mm ² | 800V/41A/0.5-6 mm ² | 400V/20A/0.2-2.5 mm ² |
| Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級) | 6KV / 3 | 6KV / 3 | 6KV / 3 |
| Torque (lb-in) (扭緊力矩) | 12 | 12 | 5 |
| Clamping Screw (M) (螺絲) | M4 | M4 | M2.6 |
| Insulation stripping length(mm) (剝線長度) | 13mm | 10mm | 8mm |
| Material/Available Color (材質顏色) | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | T / W / H (mm) | T / W / H (mm) |
| For TS35x7.5 | 8x65.5x48.5 | 8x65.5x48.5 | 6x22x20 |
| For TS35x15 | 8x65.5x56 | 8x65.5x56 | |
| Accessories (附件) | Cat. No. Qty. | Cat. No. Qty. | Cat. No. Qty. |
| End Bracket (終端擋板) | CEW35/2 50 SEW35 50 | CEW35/2 50 SEW35 50 | CDUS2.5-C 50 - |
| End Plate (擋板) | CEP8 50 | CEP8 50 | |
| Partition (擋板/隔片) | CEP9 50 | CEP9 50 | |
| Cross Jumper (中心式聯接件) | - | - | |
| Comb Link (邊接式聯接件) | CQB6/2 50 CQB6/3 50 CQB6/4 50 | CQB6/2 50 CQB6/3 50 CQB6/4 50 | SQB2.5 50 |
| Warning Cover (安全標示蓋) | | | |
| Marking Tags (標記號) | W6 W6Z W6K 500 W8 W8Z W6K 500 | W6 W6Z W6K 500 W8 W8Z W6K 500 | W6 W6Z W6K 500 |
| Test plug (測試插頭) | TPS4 (Ø4) 50 | TPS4 (Ø4) 50 | |
| Socket (測試插孔) | TP4 50 | TP4 50 | |
| Protection Cover (防觸蓋) | - | | |
| Retaining Plates (中界板) | - | | |
| Tool (工具) | DS4 | DS4 | DS3 |

Features of Screw Clamp Terminal Blocks

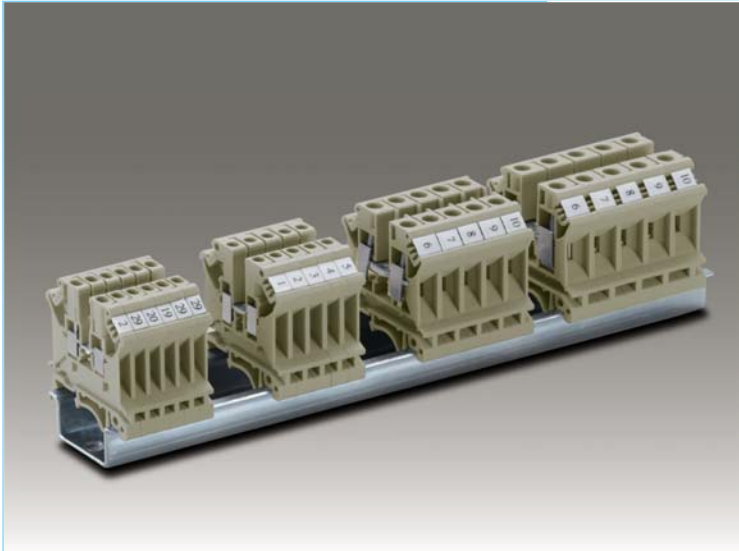

CDU 2.5N



Features of Screw Clamp Terminal Blocks


- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- Easy for the extension of terminal connection.
- Ease of handling and safe connection.
- An excellent vibration proof protection against loosening.
- High reliability and maintenance free.
- Very low contact resistance.
- Easy mounting and dismantling from the terminal rail.

螺絲固定型接線座之特性


- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式 (可連接多組導線)
- 容易擴充及延伸性佳
- 操作簡易且連結處安全性高
- 優良的抗震防鬆設計
- 高可靠度且無需維護保養
- 極低的接觸阻抗
- 接線座從軌道上安裝及拆卸容易

| Specifications (產品規格) | 2.5 mm ² | |
|-------------------------------------------------------------------------|---------------------------------------|----------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | |
| UL | cUL ^{us} 600V/20A/AWG 12-28 | |
| CSA | 600V/20A/AWG 12-28 | |
| IEC | 800V/24A/0.5-2.5 mm ² | |
| Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級) | 8KV / 3 | |
| Torque (lb-in) (扭緊力矩) | 7 | |
| Clamping Screw (M) (螺絲) | M2.6 | |
| Insulation stripping length(mm) (剝線長度) | 8-10 mm | |
| Material/Available Color (材質顏色) | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | |
| For TS35x7.5 | 5x42.5x47 | |
| For TS35x15 | 5x42.5x54.5 | |
| Accessories (附件) | Cat. No. | Qty. |
| End Bracket (終端擋板) | SEW35 CEW35/2 | 50 50 |
| End Plate (擋板) | CEP 6 | 50 |
| Partition (擋板/隔片) | CEP 6 | 50 |
| Cross Jumper (中心式聯接件) | CQV 2.5/2 | 50 |
| | CQV 2.5/3 | 50 |
| | CQV 2.5/4 | 50 |
| | CQV 2.5/10 | 20 |
| Comb Link (邊接式聯接件) | CQB 2.5/2 | 50 |
| | CQB 2.5/3 | 50 |
| | CQB 2.5/10 | 20 |
| Warning Cover (安全標示蓋) | WSS 2.5 | 50 |
| Marking Tags (標記號) | W5 W5Z W5K | 500 |
| Test plug (測試插頭) | TPS2.3 (Ø2.3) | 20 |
| Socket (測試插孔) | TP2.3 | 50 |
| Protection Cover (防觸蓋) | DP1 | 20 |
| Retaining Plates (中界板) | AD1 | 50 |
| Tool (工具) | DS3 | |


CDU 2.5/3N



CDU 2.5/4N




CDU 4N




| Specifications (產品規格) | 2.5 mm ² | | 2.5 mm ² | | 4 mm ² | |
|-------------------------------------------------------------------------|---------------------------------------|------|---------------------------------------|------|-------------------------------------------|------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | | Rated voltage/Rated current/Wire size | | Rated voltage/Rated current/Wire size | |
| UL | 300V/20A/AWG 12-24 | | 300V/20A/AWG 12-24 | | cUL [®] 600 V / 30 A / AWG 10-22 | |
| CSA | 300V/20A/AWG 12-24 | | 300V/20A/AWG 12-24 | | 600 V / 30 A / AWG 10-22 | |
| IEC | 400V/24A/0.2-2.5mm ² | | 400V/24A/0.2-2.5mm ² | | 800V/32A/0.5-4mm ² | |
| Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級) | 6KV / 3 | | 6KV / 3 | | 8KV / 3 | |
| Torque (lb-in) (扭緊力矩) | 5 | | 5 | | 7.7 | |
| Clamping Screw (M) (螺絲) | M2.6 | | M2.6 | | M3 | |
| Insulation stripping length(mm) (剝線長度) | 8 mm | | 8 mm | | 8-10 mm | |
| Material/Available Color (材質顏色) | | | | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | | T / W / H (mm) | | T / W / H (mm) | |
| For TS35x7.5 | 5.2/50.5/47 | | 5.2/63.5/47 | | 6x42.5x47 | |
| For TS35x15 | 5.2/50.5/54.5 | | 5.2/63.5/54.5 | | 6x42.5x54.5 | |
| Accessories (附件) | Cat. No. | Qty. | Cat. No. | Qty. | Cat. No. | Qty. |
| End Bracket (終端擋板) | CEW35/2 | 50 | CEW35/2 | 50 | SEW35 | 50 |
| | SEW35 | 50 | SEW35 | 50 | CEW35/2 | 50 |
| End Plate (擋板) | CDU2.5/3-C | 50 | CDU2.5/4-C | 50 | CEP 6 | 50 |
| Partition (擋板/隔片) | - | 50 | - | 50 | CEP 6 | 50 |
| Cross Jumper (中心式聯接件) | | 50 | | 50 | CQV 4/2 | 50 |
| | CQVM2.5/2 | 50 | CQVM2.5/2 | 50 | CQV 4/3 | 50 |
| | | 20 | | 20 | CQV 4/4 | 50 |
| | | 50 | | 50 | CQV 4/10 | 20 |
| Comb Link (邊接式聯接件) | CQB2.5/2 | 50 | CQB2.5/2 | 50 | CQB 4/2 | 50 |
| | | 20 | | 20 | CQB 4/3 | 50 |
| | | 20 | | 20 | CQB 4/10 | 20 |
| Warning Cover (安全標示蓋) | - | 50 | - | 50 | WSS4 | 50 |
| Marking Tags (標記號) | W5 | 500 | W5 | 500 | W6 W6Z W6K | 500 |
| Test plug (測試插頭) | - | 20 | - | 20 | TPS2.3 (Ø2.3) | 20 |
| Socket (測試插孔) | - | 50 | - | 50 | TP2.3 | 50 |
| Protection Cover (防觸蓋) | - | 20 | - | 20 | DP1 | 20 |
| Retaining Plates (中隔板) | - | 50 | - | 50 | AD1 | 50 |
| Tool (工具) | DS3 | | DS3 | | DS3 | |


CDU 4/3N



CDU 4/4N




CDU 6N




| Specifications (產品規格) | 4 mm ² | 4 mm ² | 6 mm ² |
|-------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size |
| UL | 300V/30A/AWG 10-24 | 300V/30A/AWG 10-24 | 600 V / 50 A / AWG 8-26 |
| CSA | 300V/30A/AWG 10-24 | 300V/30A/AWG 10-24 | 600 V / 50 A / AWG 8-26 |
| IEC | 500V/32A/0.2-4mm ² | 500V/32A/0.2-4mm ² | 800V/57A/0.5-6mm ² |
| Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級) | 6KV / 3 | 8KV / 3 | 8KV / 3 |
| Torque (lb-in) (扭緊力矩) | 7 | 7 | 14 |
| Clamping Screw (M) (螺絲) | M3 | M3 | M4 |
| Insulation stripping length(mm) (剝線長度) | 8 mm | 8 mm | 10-12 mm |
| Material/Available Color (材質顏色) | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | T / W / H (mm) | T / W / H (mm) |
| For TS35x7.5 | 6.2/50.5/47 | 6.2/63.5/47 | 8 x 42.5 x 47 |
| For TS35x15 | 6.2/50.5/54.5 | 6.2/63.5/54.5 | 8 x 42.5 x 54.5 |
| Accessories (附件) | Cat. No. Qty. | Cat. No. Qty. | Cat. No. Qty. |
| End Bracket (終端擋板) | CEW35/2 50 SEW35 50 | CEW35/2 50 SEW35 50 | SEW35 50 CEW35/2 50 |
| End Plate (擋板) | CDU4/3-C 50 | CDU4/4-C 50 | CEP 6 50 |
| Partition (擋板/隔片) | - 50 | - 50 | CEP 6 50 |
| Cross Jumper (中心式聯接件) | 50 | 50 | CQV 6/2 50 |
| | CQVM4/2 50 | CQVM4/2 50 | CQV 6/3 50 |
| | 50 | 50 | CQV 6/4 50 |
| | 20 | 20 | CQV 6/10 20 |
| | 50 | 50 | CQB-6/2 50 |
| Comb Link (邊接式聯接件) | CQB4/2 50 | CQB4/2 50 | CQB-6/3 50 |
| | 20 | 20 | CQB-6/10 20 |
| | 50 | 50 | WSS6 50 |
| Warning Cover (安全標示蓋) | - 50 | - 50 | WSS6 50 |
| Marking Tags (標記號) | W6 500 | W6 500 | W6 W6Z W6K 500 |
| Test plug (測試插頭) | - 20 | - 20 | TPS2.3 (Ø2.3) 20 TPS4 (Ø4) 20 |
| Socket (測試插孔) | - 50 | - 50 | TP2.3 50 TP4 50 |
| Protection Cover (防觸蓋) | - 20 | - 20 | DP1 20 |
| Retaining Plates (中界板) | - 50 | - 50 | AD1 50 |
| Tool (工具) | DS3 | DS3 | DS4 |


CDU 10N



CDU 2.5M



CDU 4M



| Specifications (產品規格) | 10 mm ² | 2.5 mm ² | 4 mm ² |
|----------------------------------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
| Technical Data (技術參數) | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size | Rated voltage/Rated current/Wire size |
| UL | 600 V/65 A/AWG 6-24 | 300V/20A/AWG 12-22 | 300V/30A/AWG 10-22 |
| CSA | 600 V/65 A/AWG 6-24 | 300V/20A/AWG 12-22 | 300V/30A/AWG 10-22 |
| IEC | 800V/76A/0.5-10mm ² | 400V/24A/0.2-2.5mm ² | 500V/30/0.5-4mm ² |
| Insulating impulse voltage withstand (額定衝擊電壓/Pollution degree /污染等級) | 8KV / 3 | 6KV / 3 | 6KV / 3 |
| Torque (lb-in) (扭緊力矩) | 19 | 7 | 7.7 |
| Clamping Screw (M) (螺絲) | M4 | M2.6 | M3 |
| Insulation stripping length(mm) (剝線長度) | 10-12 mm | 6 mm | 6mm |
| Material/Available Color (材質顏色) | | | |
| Rail Dimensions (導軌尺寸) | T / W / H (mm) | T / W / H (mm) | T / W / H (mm) |
| For TS35x7.5 | 10 x 42.5 x 47 | | |
| For TS15x5.5 | 10 x 42.5 x 54.5 | 5x 28 x 33 | 6x 28 x 33 |
| Accessories (附件) | Cat. No. Qty. | Cat. No. Qty. | Cat. No. Qty. |
| End Bracket (終端擋板) | SEW35 50 CEW35/2 50 | CEW 15 50 | CEW 15 50 |
| End Plate (擋板) | CEP 6 50 | CEP 7 50 | CEP 7 50 |
| Partition (擋板/隔片) | CEP 6 50 | | |
| Cross Jumper (中心式聯接件) | CQV 10/2 50 | CQVM 2.5/2 50 | CQVM 4/2 50 |
| | CQV 10/3 50 | CQVM 2.5/3 50 | CQVM 4/3 50 |
| | CQV 10/4 50 | CQVM 2.5/10 50 | CQVM 4/10 50 |
| | CQV 10/10 20 | | |
| Comb Link (邊接式聯接件) | CQB-10/2 50 | CQB 2.5/2 50 | CQB 4/2 50 |
| | CQB-10/3 50 | CQB 2.5/3 50 | CQB 4/3 50 |
| | CQB-10/10 20 | | |
| Warning Cover (安全標示蓋) | WSS 10 50 | | |
| Marking Tags (標記號) | W6 W6Z W6K 500 | W5 W5Z W5K 500 | W6 W6Z W6K 500 |
| Test plug (測試插頭) | TPS2.3 (Ø2.3) 20 | | |
| | TPS4 (Ø4) 20 | | |
| Socket (測試插孔) | TP2.3 50 | | |
| | TP4 50 | | |
| Protection Cover (防觸蓋) | DP1 20 | | |
| Retaining Plates (中界板) | AD1 50 | | |
| Tool (工具) | DS4 | DS3 | DS3 |