



SEKI CONTROLS CO., LTD

[www.sekicon.com](http://www.sekicon.com)[Home](#)[About](#)[Products](#)[Support](#)[Sitemap](#)[Korean](#)[Chinese](#)


### Products;

We provide you the cheapest protection devices against damages from overheating for your valuable products.

## Products

[> ST-12](#)[> ST-22](#)[Home](#) > [Product](#) > [ST-22](#)

## ST-22

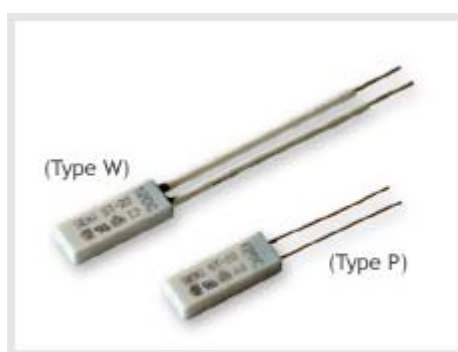

## ST-22 (Type P, W)

### Feature

- Snap Action
- Automatic Reset
- 100% Water Proof
- Superior Heat Response
- High Grade Thermoplastic Insulated Case

[Zoom](#)[Drawing](#)[Recall](#)

### Application

Overheat Protection for Electric Motors, Fluorescent Ballasts, Battery Chargers, Transformers, S Heating pads, OA-Machines ETC.

### Temperature Setting range (at no load)

70°C ~ 150°C

### Tolerance

±5°C

### ON-OFF Differential Temp (general)

30 ± 15K

### Heat Endurance

Open temp. +50°C/continuity, 200°C/1 min.






### Life test (Resistive Load)



8A/125V 10,000 cycles, 5A/250V 10,000 cycles

### Contact Capacity

Min. Current 50mA/continuity, Max. Current 30A/5 cycles

### Application view

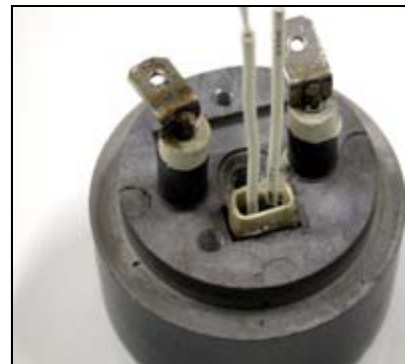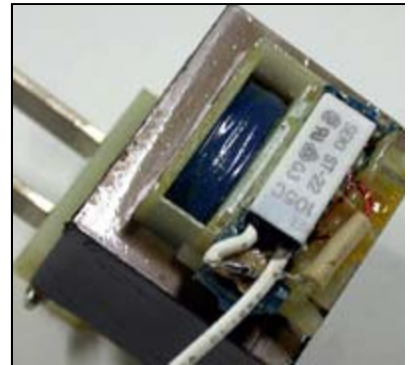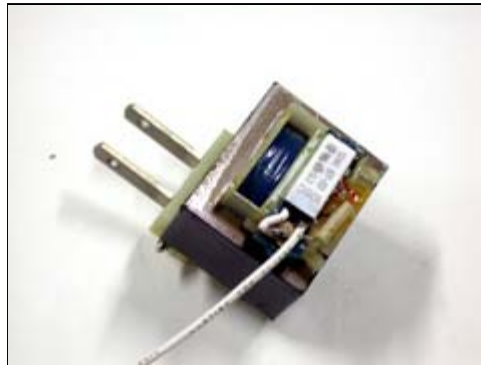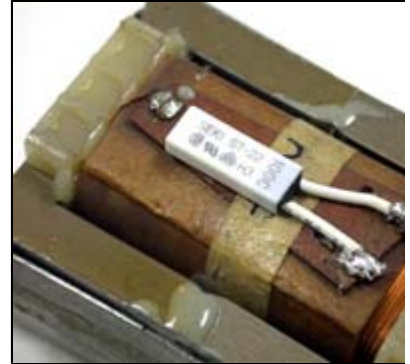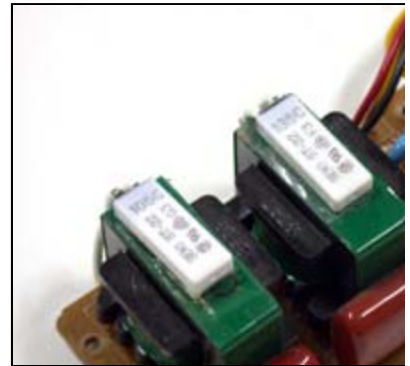

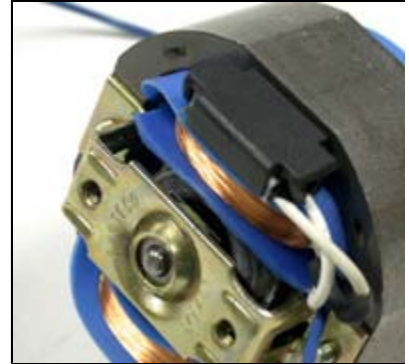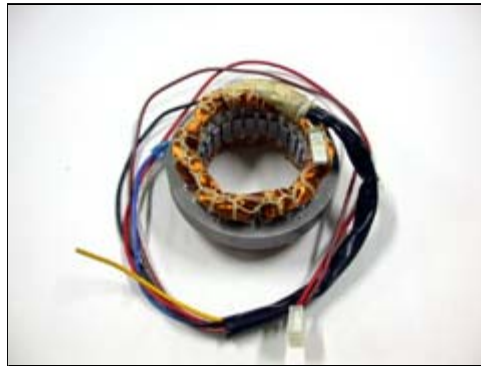

Copyright (c) 2003 Seki controls co., LTD All Rights Reserved.  
TEL : +82-32-653-1500, Fax : +82-32-663-0659

[help@seki](mailto:help@seki.com)