

FEATURES

- ※ Double switch
- ※ Two Circuit


APPLICATION

- ※ Audio, OA equipment
- ※ Instrumentation
- ※ Setup box

SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±50gf
Travel	0.20mm
Operating Life	100,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

CIRCUIT

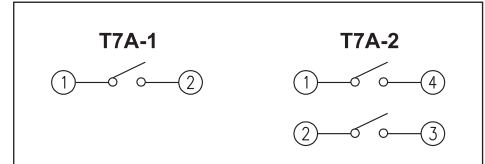

PACKAGE


<Bag>
400 pcs

HOW TO ORDER


T7A-□14KQP

- 1=Single Stem
- 2=Double Stem
- Stem High: 3.80mm
- Package: Bulk Pack
- Halogen Free
- Stem Color: Black
- Operating Force: 180gf

T7A-1

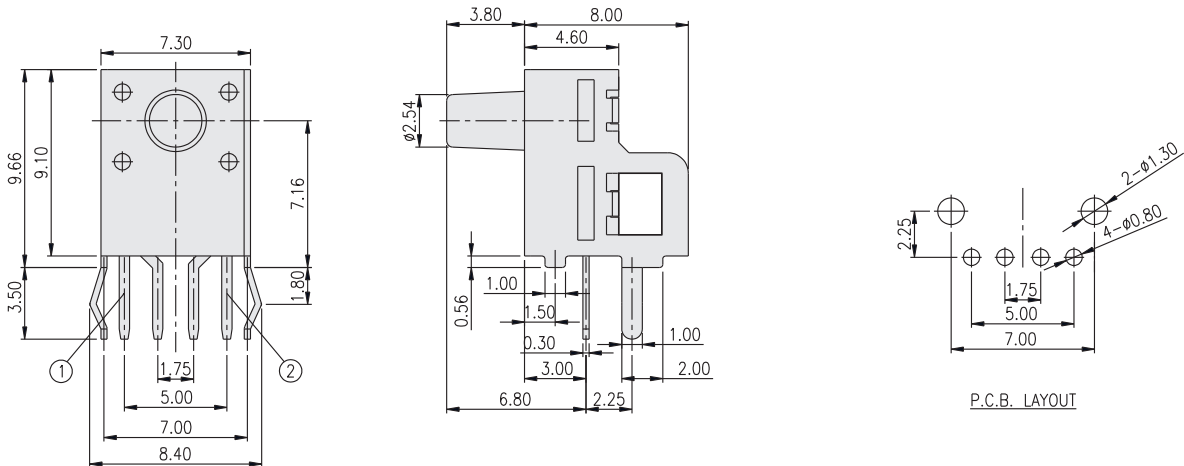

T7A-2

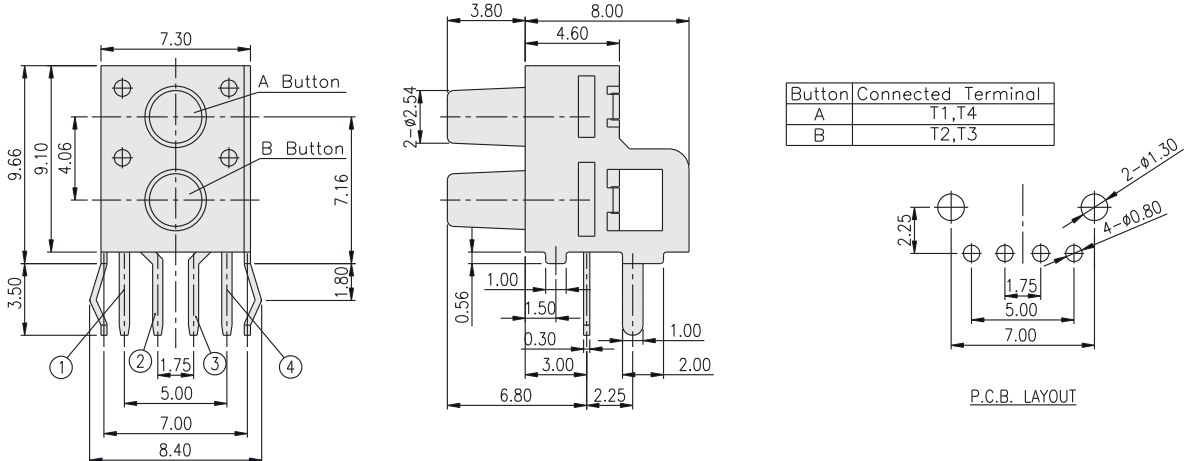

Button	Connected Terminal
A	T1, T4
B	T2, T3