

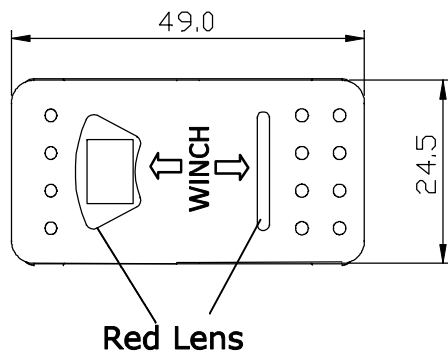


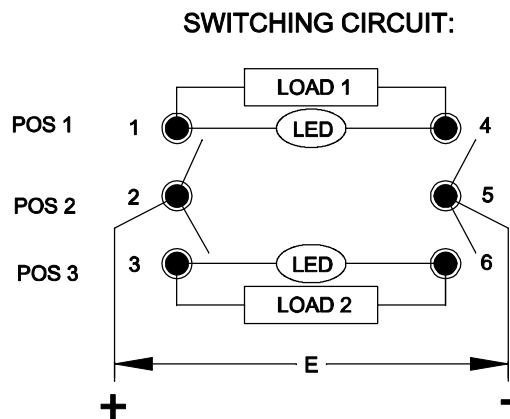

POS 1 POS 2 POS 3

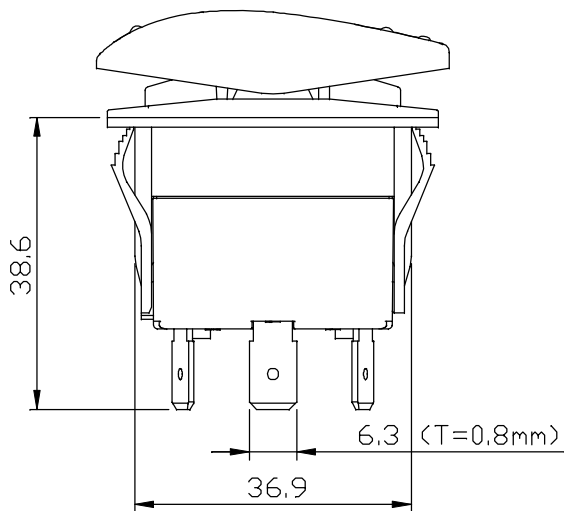

ROCKER SWITCH MODEL: X5 SERIES


RATING:16A DC30V~ μT55 (cURus/ENEC15)

DIELECTRIC WITHSTAND VOLTAGE:1500VAC FOR 1 MINUTE


INSULATION RESISTANCE:DC 500V 100MΩ (MIN)

CONTACT RESISTANCE: 20mΩ INITIAL (MAX)

ILLUMINATION: DC 12V

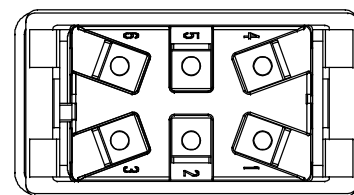

ACTUATOR APPERANCE:

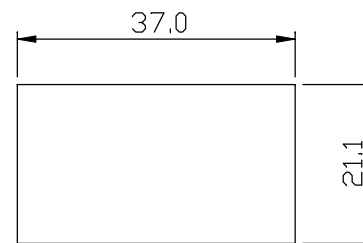

Panel Cutout



NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm .012/0.3$ (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES		ANGLE $\frac{1}{2}^\circ$			UNIT	mm	PART NAME	DWG NO
A			DRAWN BY	張俊雄	DESIGNED BY	王豐文	SCALE	1/1		X5 SPEC DRAWING	WS2255A
B			CHECKED BY		APPROVED BY		DATE	2013.07.17	PART NO	X5-264E4W-1ABD-7FP	
↑ 2013.07.17	首次出圖	張俊雄									