

Features of Spring Clamp Ground Terminal Blocks



Features of Spring Clamp Ground Terminal Blocks

- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy of handling and safe connection.
- Low contact resistance.
- Easy mounting and dismounting from the terminal rail.

彈片接地型接線座之特性

- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易

DST 1.5-PE-D




C.A. 115



Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	AWG 28-14	
CSA	AWG 28-14	
IEC	0.08-2.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5 	4.2 x 48.8 x 36.5	
For TS35x7.5 	4.2 x 48.8 x 44	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	DD-ST2.5-DP	50
Comb Link (邊接式聯接件) 	DFBS2-4	50
	DFBS3-4	50
	DFBS4-4	50
	DFBS5-4	50
	DFBS10-4	10
Marking Tags (標記號) 	DUC-TMF4	10
	DUC-TM4	10
Tool (工具) 	DS2	


Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

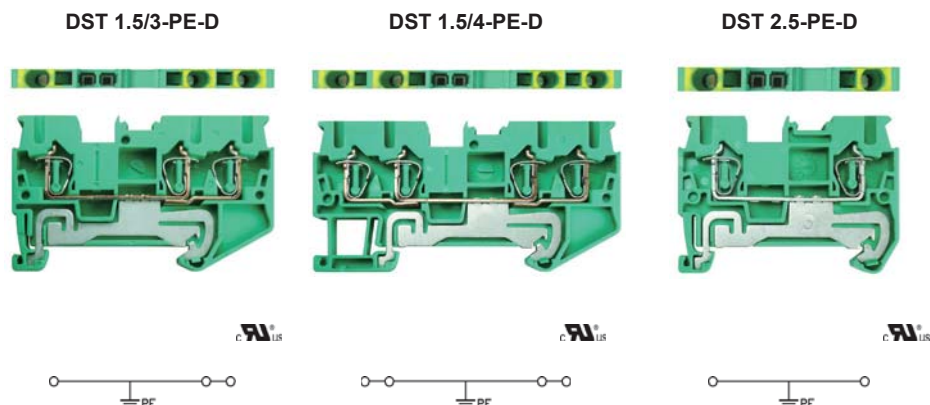


Specifications (產品規格)	1.5mm ²		1.5mm ²		2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 28-14		AWG 28-14		AWG 28-12	
CSA	AWG 28-14		AWG 28-14		AWG 28-12	
IEC	0.08-2.5mm ²		0.08-2.5mm ²		0.08-4mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3		6KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	4.2 x 60.7 x 36.5		4.2 x 72.6 x 36.5		5.2 x 48.8 x 36.5	
For TS35x7.5 	4.2 x 60.7 x 44		4.2 x 72.6 x 44		5.2 x 48.8 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-ST2.5/3-DP	50	DD-ST2.5/4-DP	50	DD-ST2.5-DP	50
Comb Link (連接式聯接件) 	DFBS2-4	50	DFBS2-4	50	DFBS2-5	50
	DFBS3-4	50	DFBS3-4	50	DFBS3-5	50
	DFBS4-4	50	DFBS4-4	50	DFBS4-5	50
	DFBS5-4	50	DFBS5-4	50	DFBS5-5	50
	DFBS10-4	10	DFBS10-4	10	DFBS10-5	10
Marking Tags (標記號) 	DUC-TMF4	10	DUC-TMF4	10	DUC-TMF5	10
	DUC-TM4	10	DUC-TM4	10	DUC-TM5	10
Tool (工具) 	DS2		DS2		DS3	

Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座


DST 2.5/3-PE-D

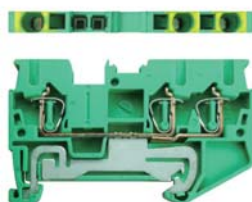

DST 2.5/4-PE-D

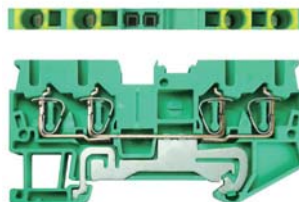



DST 4-PE-D




Specifications (產品規格)	2.5mm ²		2.5mm ²		4mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 28-12		AWG 28-12		AWG 28-10	
CSA	AWG 28-12		AWG 28-12		AWG 28-10	
IEC	0.08-4mm ²		0.08-4mm ²		0.08-6mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	5.2 x 60.7 x 36.5		5.2 x 72.4 x 36.5		6.2 x 56.1 x 36.5	
For TS35x7.5	5.2 x 60.7 x 44		5.2 x 72.4 x 44		6.2 x 56.1 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	DD-ST2.5/3-DP	50	DD-ST2.5/4-DP	50	DD-ST4-DP	50
Comb Link (連接式聯接件)	DFBS2-5	50	DFBS2-5	50	DFBS2-6	50
	DFBS3-5	50	DFBS3-5	50	DFBS3-6	50
	DFBS4-5	50	DFBS4-5	50	DFBS4-6	50
	DFBS5-5	50	DFBS5-5	50	DFBS5-6	50
	DFBS10-5	10	DFBS10-5	10	DFBS10-6	10
Marking Tags (標記號)	DUC-TMF5	10	DUC-TMF5	10	DUC-TMF6	10
	DUC-TM5	10	DUC-TM5	10	DUC-TM6	10
Tool (工具)	DS3		DS3		DS3	

Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座


DST 4/3-PE-D

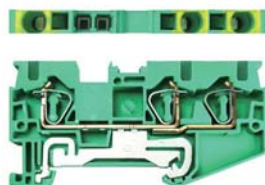

DST 4/4-PE-D

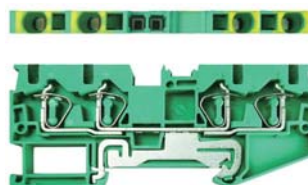


DST 6-PE-D



Specifications (產品規格)	4mm ²		4mm ²		6mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 28-10		AWG 28-10		AWG 24-8	
CSA	AWG 28-10		AWG 28-10		AWG 24-8	
IEC	0.08-6mm ²		0.08-6mm ²		0.2-10mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		12mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	6.2 x 71.7 x 36.5		6.2 x 87.3 x 36.5		8.2 x 69.5 x 43.5	
For TS35x7.5	6.2 x 71.7 x 44		6.2 x 87.3 x 44		8.2 x 69.5 x 51	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	DD-ST4/3-DP	50	DD-ST4/4-DP	50	DD-ST6-DP	50
Comb Link (連接式聯接件)	DFBS2-6	50	DFBS2-6	50	DFBS2-8	50
	DFBS3-6	50	DFBS3-6	50	DFBS3-8	50
	DFBS4-6	50	DFBS4-6	50	DFBS4-8	50
	DFBS5-6	50	DFBS5-6	50	DFBS5-8	50
	DFBS10-6	10	DFBS10-6	10	DFBS10-8	10
Marking Tags (標記號)	DUC-TMF6	10	DUC-TMF6	10	DUC-TMF8	10
	DUC-TM6	10	DUC-TM6	10	DUC-TM8	10
Tool (工具)	DS3		DS3		DS4	

Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座


DST 6/3-PE-D

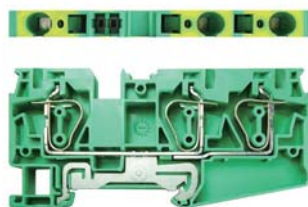

DST 10-PE-D




DST 10/3-PE-D

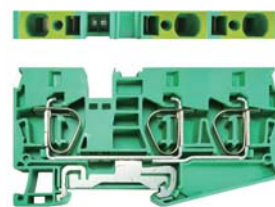


Specifications (產品規格)	6mm²	10mm²	10mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	
UL	AWG 24-8	AWG 24-6	AWG 24-6	
CSA	AWG 24-8	AWG 24-6	AWG 24-6	
IEC	0.2-10mm²	0.2-16mm²	0.2-16mm²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3	
Insulation stripping length (mm) (撥線長度)	12mm	18mm	18mm	
Material / Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)	
For TS35x7.5 	8.2 x 90.5 x 43.5	10.2 x 71.3 x 50.5	10.2 x 97 x 50.5	
For TS35x7.5 	8.2 x 90.5 x 51	10.2 x 71.3 x 58	10.2 x 97 x 58	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	DD-ST6/3-DP	50	DD-ST10-DP	50
Comb Link (連接式聯接件) 	DFBS2-8	50	DFBS2-10	10
	DFBS3-8	50		
	DFBS4-8	50		
	DFBS5-8	50		
	DFBS10-8	10		
Marking Tags (標記號) 	DUC-TMF8	10	DUC-TMF10	10
	DUC-TM8	10	DUC-TM10	10
Tool (工具) 	DS3	DS5	DS5	

Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

DST 16-PE-D



DST 16/3-PE-D

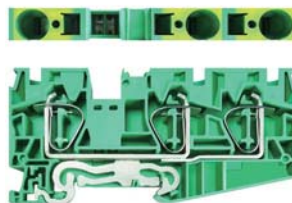

DST 2.5/1P-PE-D



Specifications (產品規格)	16mm²		16mm²		2.5mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 24-4		AWG 24-4		AWG 28-12	
CSA	AWG 24-4		AWG 24-4		AWG 28-12	
IEC	0.2-25mm²		0.2-25mm²		0.08-4mm²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		6KV / 3	
Insulation stripping length (mm) (撥線長度)	18mm		18mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	12.2 x 80.6 x 51.5		12.2 x 107.8 x 51.5		5.2 x 48.8 x 36.5	
For TS35x7.5 	12.2 x 80.6 x 59		12.2 x 107.8 x 59		5.2 x 48.8 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-ST16-DP	50	DD-ST16/3-DP	50	DD-ST2.5-DP	50
Comb Link (邊接式聯接件) 	DFBS2-12	10	DFBS2-12	10	DFBS2-5	50
					DFBS3-5	50
					DFBS4-5	50
					DFBS5-5	50
					DFBS10-5	10
Marking Tags (標記號) 	DUC-TMF12	10	DUC-TMF12	10	DUC-TMF5	10
	DUC-TM12	10	DUC-TM12	10	DUC-TM5	10
Tool (工具) 	DS5		DS5		DS3	

Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

DSTTB 2.5-PE-D



Specifications (產品規格)	2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	AWG 28-12	
CSA	AWG 28-12	
IEC	0.08-4mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	5.2 x 67.8 x 47.4	
For TS35x7.5	5.2 x 67.8 x 54.9	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	DD-STTB2.5-DP	50
Comb Link (邊接式聯接件)	DFBS2-5	50
	DFBS3-5	50
	DFBS4-5	50
	DFBS5-5	50
	DFBS10-5	10
Marking Tags (標記號)	DUC-TMF5	10
	DUC-TM5	10
Tool (工具)	DS3	