


Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

PUSH IN SREIES

Features of Spring Clamp Terminal Blocks

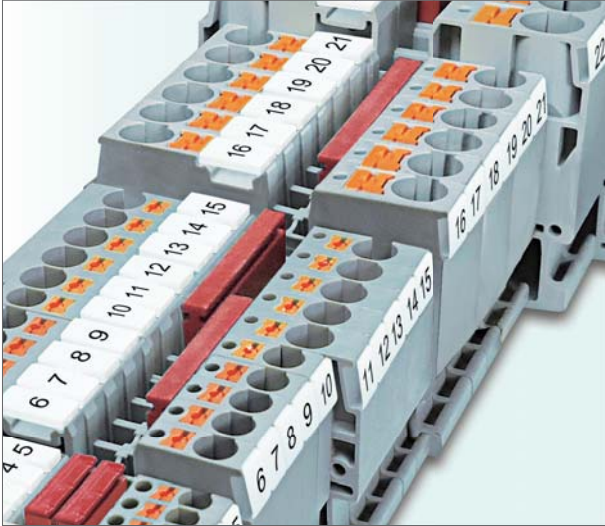

Features of Spring Clamp Terminal Blocks


- Space-saving design / Front connection.
- Vibration proof anti-loosening wire connection with pre-stressed Spring Clamp.
- Easy to operate, fast wiring installation with top wire entry.
- Easy mounting and dismounting from the terminal rail.
- Corrosion-proof terminal points.
- Low contact resistance.
- Easy for the extension of terminal connection.
- Easy handling and safe connection.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.

彈片壓接型接線座之特性

- 節省空間之特性 / 前緣導線連接方式
- 高強度壓力的彈力迫緊連接方式，具有抗震與防鬆的效果
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 接線座從軌道上安裝及拆卸容易
- 低接觸電阻
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作

Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 26-14	
CSA	600V / 15A / AWG 26-14	
IEC	500V / 17.5A / 0.14-1.5mm ²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	3.5 x 45 x 32	
For TS35x7.5	3.5 x 45 x 39.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	DD-PT1.5	50
Comb Link (連接式聯接件)	DFBS2-3.5	50
	DFBS3-3.5	50
	DFBS4-3.5	50
	DFBS5-3.5	50
	DFBS10-3.5	10
Marking Tags (標記號)	DUC-TMF3.5	10
	DUC-TM3.5	10
Tool (工具)	DS2	



Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

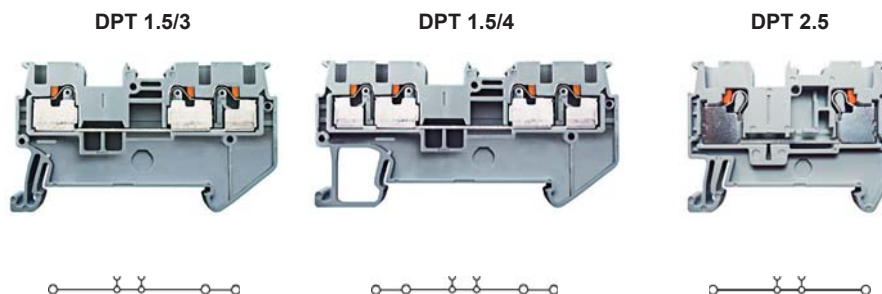


Specifications (產品規格)	1.5mm²	1.5mm²	2.5mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	
UL	600V / 15A / AWG 26-14	600V / 15A / AWG 26-14	600V / 20A / AWG 26-12	
CSA	600V / 15A / AWG 26-14	600V / 15A / AWG 26-14	600V / 20A / AWG 26-12	
IEC	500V / 17.5A / 0.14-1.5mm²	500V / 17.5A / 0.14-1.5mm²	800V / 30A / 0.14-4mm²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	6KV / 3	8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	10mm	10mm	
Material / Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)	
For TS35x7.5 	3.5 x 54.1 x 32	3.5 x 63.2 x 32	5.2 x 48.5 x 36.5	
For TS35x7.5 	3.5 x 54.1 x 39.5	3.5 x 63.2 x 39.5	5.2 x 48.5 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT1.5/3	50	DD-PT1.5/4	50
Comb Link (連接式聯接件) 	DFBS2-3.5	50	DFBS2-3.5	50
	DFBS3-3.5	50	DFBS3-3.5	50
	DFBS4-3.5	50	DFBS4-3.5	50
	DFBS5-3.5	50	DFBS5-3.5	50
	DFBS10-3.5	10	DFBS10-3.5	10
Marking Tags (標記號) 	DUC-TMF3.5	10	DUC-TMF3.5	10
	DUC-TM3.5	10	DUC-TM3.5	10
Tool (工具) 	DS2	DS2	DS3	

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

DPT 2.5/3



DPT 2.5/4



DPT 4



Specifications (產品規格)	2.5mm²	2.5mm²	4mm²			
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size			
UL	600V / 20A / AWG 26-12	600V / 20A / AWG 26-12	600V / 30A / AWG 24-10			
CSA	600V / 20A / AWG 26-12	600V / 20A / AWG 26-12	600V / 30A / AWG 24-10			
IEC	800V / 30A / 0.14-4mm²	800V / 30A / 0.14-4mm²	800V / 38A / 0.2-6mm²			
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3			
Insulation stripping length (mm) (撥線長度)	10mm	10mm	10mm			
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)			
For TS35x7.5 	5.2 x 60.7 x 36.5	5.2 x 72.4 x 36.5	6.2 x 56.1 x 36.5			
For TS35x7.5 	5.2 x 60.7 x 44	5.2 x 72.4 x 44	6.2 x 56.1 x 44			
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.		
End Bracket (終端擋板) 	SEW35	50	SEW35	50		
End Plate (擋板) 	DD-PT2.5/3	50	DD-PT2.5/4	50	DD-ST4-D	50
Comb Link (邊接式聯接件) 	DFBS2-5	50	DFBS2-5	50	DFBS2-6	50
	DFBS3-5	50	DFBS3-5	50	DFBS3-6	50
	DFBS4-5	50	DFBS4-5	50	DFBS4-6	50
	DFBS5-5	50	DFBS5-5	50	DFBS5-6	50
	DFBS10-5	10	DFBS10-5	10	DFBS10-6	10
Marking Tags (標記號) 	DUC-TMF5	10	DUC-TMF5	10	DUC-TMF6	10
	DUC-TM5	10	DUC-TM5	10	DUC-TM6	10
Tool (工具) 	DS3		DS3		DS3	


Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座




Specifications (產品規格)	4mm²		4mm²		6mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	600V / 30A / AWG 24-10		600V / 30A / AWG 24-10		600V / 40A / AWG 20-8	
CSA	600V / 30A / AWG 24-10		600V / 30A / AWG 24-10		600V / 40A / AWG 20-8	
IEC	800V / 38A / 0.2-6mm²		800V / 38A / 0.2-6mm²		1000V / 52A / 0.5-10mm²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		12mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	6.2 x 66.5 x 36.5		6.2 x 77 x 36.5		8.2 x 57.7 x 43.5	
For TS35x7.5 	6.2 x 66.5 x 44		6.2 x 77 x 44		8.2 x 57.7 x 51	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT4/3	50	DD-PT4/4	50	DD-PT6	50
Comb Link (連接式聯接件) 	DFBS2-6	50	DFBS2-6	50	DFBS2-8	50
	DFBS3-6	50	DFBS3-6	50	DFBS3-8	50
	DFBS4-6	50	DFBS4-6	50	DFBS4-8	50
	DFBS5-6	50	DFBS5-6	50	DFBS5-8	50
	DFBS10-6	10	DFBS10-6	10	DFBS10-8	50
Marking Tags (標記號) 	DUC-TMF6	10	DUC-TMF6	10	DUC-TMF8	10
	DUC-TM6	10	DUC-TM6	10	DUC-TM8	10
Tool (工具) 	DS3		DS3		DS4	

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座


DPT 6/3



DPT 10



DPTN 16



Specifications (產品規格)	6mm²	10mm²	16mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	
UL	600V / 40A / AWG 20-8	600V / 65A / AWG 20-6	600V / 85A / AWG 20-4	
CSA	600V / 40A / AWG 20-8	600V / 65A / AWG 20-6	600V / 85A / AWG 20-4	
IEC	1000V / 52A / 0.5-10mm²	1000V / 70A / 0.5-16mm²	1000V / 90A / 0.5-25mm²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3	
Insulation stripping length (mm) (撥線長度)	12mm	18mm	18mm	
Material / Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)	
For TS35x7.5 	8.2 x 74.2 x 43.5	10.2 x 67.7 x 50.5	12.2 x 77.6 x 51.5	
For TS35x7.5 	8.2 x 74.2 x 51	10.2 x 67.7 x 58	12.2 x 77.6 x 59	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT6/3	50	DD-PT10	50
Comb Link (邊接式聯接件) 	DFBS2-8	50	DFBS2-10	10
	DFBS3-8	50		
	DFBS4-8	50		
	DFBS5-8	50		
	DFBS10-8	10		
Marking Tags (標記號) 	DUC-TMF8	10	DUC-TMF10	10
	DUC-TM8	10	DUC-TM10	10
Tool (工具) 	DS4	DS5	DS5	

Push In Spring Clamp Terminal Blocks 推入式彈片壓接型接線座

DPTN 16/3



DPTN 35



Specifications (產品規格)	16mm ²	35mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	600V / 85A / AWG 20-4	600V / 115A / AWG 14-2
CSA	600V / 85A / AWG 20-4	600V / 115A / AWG 14-2
IEC	1000V / 90A / 0.5-25mm ²	1000V / 125A / 2.5-35mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	18mm	25mm
Material / Aavailable Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5 	12.2 x 104 x 51.5	16 x 100 x 63.2
For TS35x7.5 	12.2 x 104 x 59	16 x 100 x 70.7
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50
End Plate (擋板) 	DD-PT16/3	50
Comb Link (連接式聯接件) 	DFBS2-12	10
Marking Tags (標記號) 	DUC-TMF12	10
	DUC-TM12	10
Tool (工具) 	DS5	DS5