


Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

PUSH IN GROUNDING SREIES

Features of Spring Clamp Ground Terminal Blocks

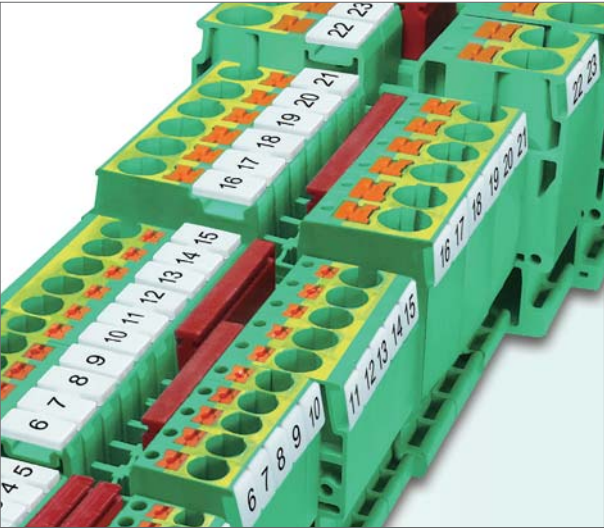

Features of Spring Clamp Ground Terminal Blocks

- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy of handling and safe connection.
- Low contact resistance.
- Easy mounting and dismounting from the terminal rail.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.

彈片接地型接線座之特性


- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式（頂部進線）
- 抗腐蝕性佳（使用良好的金屬材料）
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作

DPT 1.5-PE




Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	AWG 26-14	
CSA	AWG 26-14	
IEC	0.14-1.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	3.5 x 45 x 32	
For TS35x7.5	3.5 x 45 x 39.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	DD-PT1.5P	50
Comb Link (連接式聯接件)		
Marking Tags (標記號)	DUC-TMF3.5	10
	DUC-TM3.5	10
Tool (工具)	DS2	

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

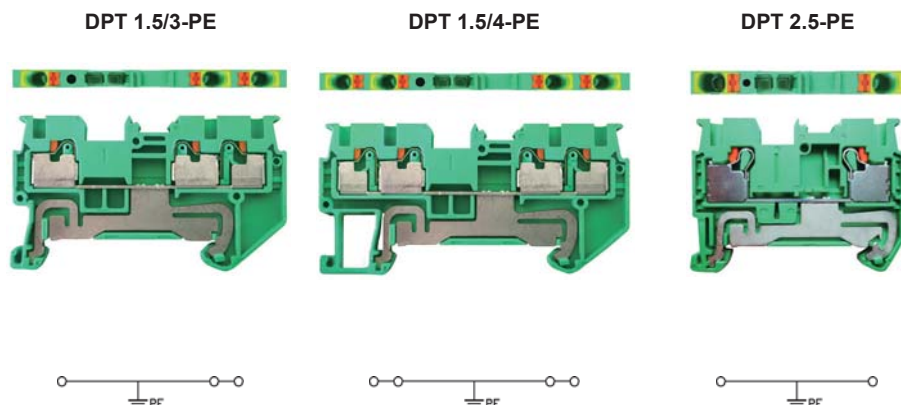

Specifications (產品規格)	1.5mm²		1.5mm²		2.5mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 26-14		AWG 26-14		AWG 26-12	
CSA	AWG 26-14		AWG 26-14		AWG 26-12	
IEC	0.14-1.5mm²		0.14-1.5mm²		0.14-4mm²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3		6KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	3.5 x 54.1 x 32		3.5 x 63.2 x 32		5.2 x 48.5 x 36.5	
For TS35x7.5 	3.5 x 54.1 x 39.5		3.5 x 63.2 x 39.5		5.2 x 48.5 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT1.5/3P	50	DD-PT1.5/4P	50	DD-ST2.5P	50
Comb Link (連接式聯接件) 						
Marking Tags (標記號) 	DUC-TMF3.5	10	DUC-TMF3.5	10	DUC-TMF5	10
	DUC-TM3.5	10	DUC-TM3.5	10	DUC-TM5	10
Tool (工具) 	DS2		DS2		DS3	


Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

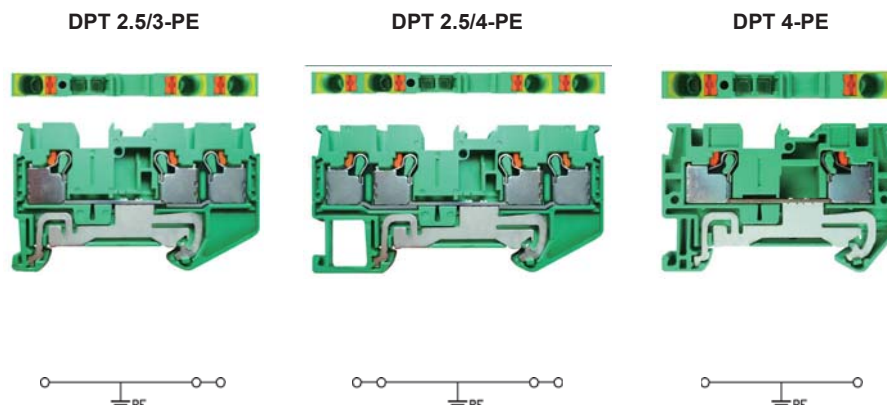


Specifications (產品規格)	2.5mm ²		2.5mm ²		4mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 26-12		AWG 26-12		AWG 24-10	
CSA	AWG 26-12		AWG 26-12		AWG 24-10	
IEC	0.14-4mm ²		0.14-4mm ²		0.2-6mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	5.2 x 60.7 x 36.5		5.2 x 72.4 x 36.5		6.2 x 56.1 x 36.5	
For TS35x7.5	5.2 x 60.7 x 44		5.2 x 72.4 x 44		6.2 x 56.1 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	DD-PT2.5/3P	50	DD-PT2.5/4P	50	DD-ST4-DP	50
Comb Link (連接式聯接件)						
Marking Tags (標記號)	DUC-TMF5	10	DUC-TMF5	10	DUC-TMF6	10
	DUC-TM5	10	DUC-TM5	10	DUC-TM6	10
Tool (工具)	DS3		DS3		DS3	

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座



DPT 4/3-PE



DPT 4/4-PE




DPT 6-PE



Specifications (產品規格)	4mm²		4mm²		6mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 24-10		AWG 24-10		AWG 20-8	
CSA	AWG 24-10		AWG 24-10		AWG 20-8	
IEC	0.2-6mm²		0.2-6mm²		0.5-10mm²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		12mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	6.2 x 66.5 x 36.5		6.2 x 77 x 36.5		8.2 x 57.7 x 43.5	
For TS35x7.5 	6.2 x 66.4 x 44		6.2 x 77 x 44		8.2 x 57.7 x 51	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT4/3P	50	DD-PT4/4P	50	DD-PT6P	50
Comb Link (連接式聯接件) 						
Marking Tags (標記號) 	DUC-TMF6	10	DUC-TMF6	10	DUC-TMF8	10
	DUC-TM6	10	DUC-TM6	10	DUC-TM8	10
Tool (工具) 	DS3		DS3		DS4	



Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

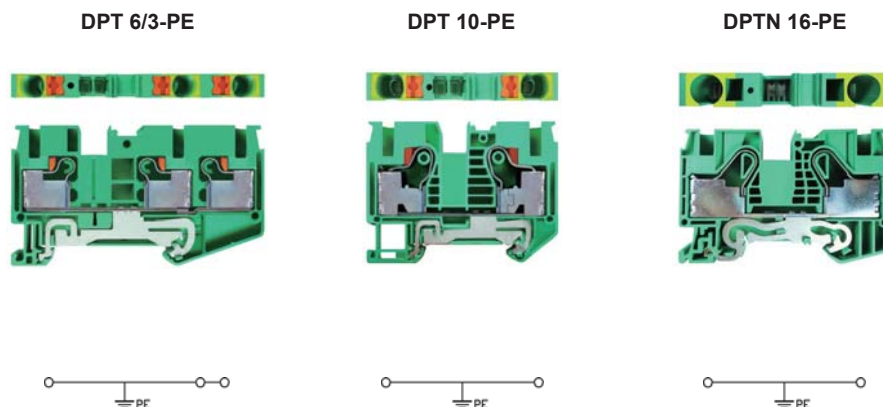

Specifications (產品規格)	6mm²		10mm²		16mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 20-8		AWG 20-6		AWG 20-4	
CSA	AWG 20-8		AWG 20-6		AWG 20-4	
IEC	0.5-10mm²		0.5-16mm²		0.5-25mm²	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	12mm		18mm		18mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	8.2 x 74.2 x 43.5		10.2 x 67.7 x 50.5		12.2 x 77.6 x 51.5	
For TS35x7.5 	8.2 x 74.2 x 51		10.2 x 67.7 x 58		12.2 x 77.6 x 59	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT6/3P	50	DD-PT10P	50	DD-PT16P	50
Comb Link (邊接式聯接件) 						
Marking Tags (標記號) 	DUC-TMF8	10	DUC-TMF10	10	DUC-TMF12	10
	DUC-TM8	10	DUC-TM10	10	DUC-TM12	10
Tool (工具) 	DS4		DS5		DS5	

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

DPTN 16/3-PE



DPTN 35-PE



Specifications (產品規格)	16mm²		35mm²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 20-4		AWG 14-2	
CSA	AWG 20-4		AWG 14-2	
IEC	0.5-25mm²		2.5-35mm²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	18mm		25mm	
Material / Available Color (材質顏色)				
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)	
For TS35x7.5 	12.2 x 104 x 51.5		16 x 100 x 63.2	
For TS35x7.5 	12.2 x 104 x 59		16 x 100 x 70.7	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板) 	SEW35	50	SEW35	50
End Plate (擋板) 	DD-PT16/3P	50		
Comb Link (連接式聯接件) 				
Marking Tags (標記號) 	DUC-TMF12	10	DUC-TMF16	10
	DUC-TM12	10	DUC-TM16	10
Tool (工具) 	DS5		DS5	